

SPECIFICATION SHEET : **WH41-UNV-C**

This Is An Original Product From Fulham Co., Inc

Description : WORKHORSE Electronic Ballast.
Parallel Lamp Operation.


*** This Ballast Will Operate The Following Lamp Types:**

CFQ/4P, CFTR/4P, T5, T6SL, T8, T8SL, CFT/4P, FT/4P, T9CR, T5CR, T5HO, T10, T12, T12SL.
WHEN USED PER FULHAM's LAMP/BALLAST WIRING DIAGRAM.

ELECTRICAL DATA (Universal, 120 - 277V)


INPUT VOLT: 120V - 277V $\pm$ 10%, 50/60Hz		
LAMP TYPE AND NUMBER OF LAMPS	1	CFQ/4P, CFTR/4P, T5, T6SL, T8, CFT/4P, FT/4P, T9CR, T5CR, T5HO, T10, T12, T12SL
	2	CFQ/4P, CFTR/4P, T5, T8.
WIRING DIAGRAM #	REFER TO FULHAM's LAMP / BALLAST WIRING DIAGRAM.	
POWER FACTOR	HIGH POWER FACTOR	
THD	< 10% @ FULL POWER	
EMI/RFI COMPLIANCE	FCC PART 18-A	
SOUND RATING	" A "	
BALLAST TYPE	INSTANT START	
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41	
MIN. OPERATING TEMP	0 °C (32 °F)	
MAX. CASE TEMP	70 °C (158 °F)	
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR	
* NOTE:	PLEASE CONTACT FULHAM CUSTOMER SERVICES FOR PERTICULAR LAMP/BASLLAST SPECIFICATIONS.	

IMAGE

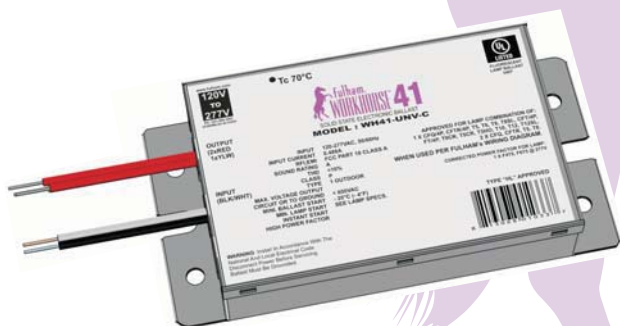

NOTE : This ballast case must be grounded

MECHANICAL DATA

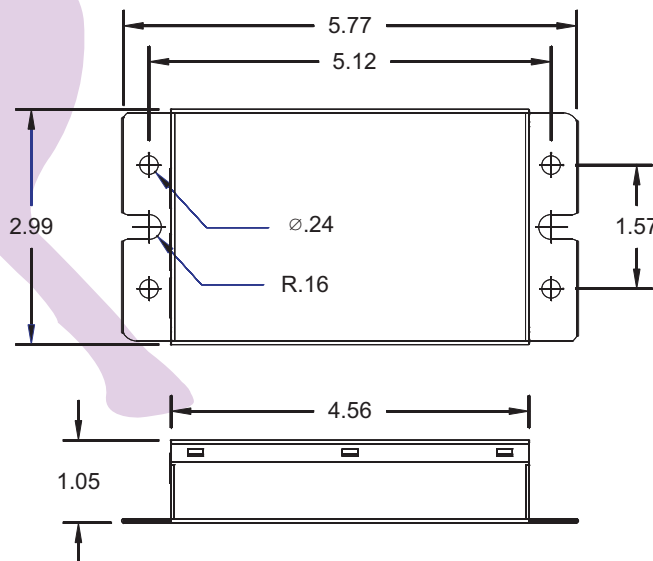

Where : L = Length, W = Width, H = Height

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 $\pm$ 1"	12 $\pm$ 1"	12 $\pm$ 1"	—	12 $\pm$ 1"	—