


LED WALLPACKS

Wallpacks

Wattage	Order Code	Lumen Output	Color Temp.	CRI	Lumen Maint. @50,000 hours [†]	Calc. L70@25°C Amb.(hrs) [†]	Fixture Color	Amp. Draw (A) 120V	Amp. Draw (A) 277V	Replaces Existing HID Wattages	Model Number
80W	WP42135	9880	4000K	80	81%	89,000	Bronze	0.69	0.30	250W	WH2-080C-ABZ
80W	WP39412*	9900	5000K	80	81%	89,000	Bronze	0.69	0.30	250W	WH2-080N-ABZ
120W	WP69128	14770	4000K	80	81%	88,000	Bronze	1.10	0.44	400W	WH2-120C-ABZ
120W	WP56933*	14770	5000K	80	81%	88,000	Bronze	1.10	0.44	400W	WH2-120N-ABZ


* Contact for lead time

† Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11

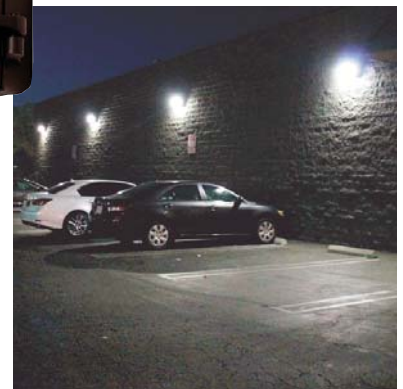

Photometrics


80W

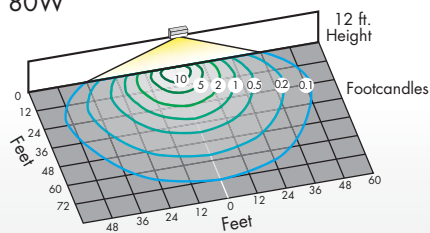

Dimensions

80W

Weight: 15 lbs (6.8 kg)

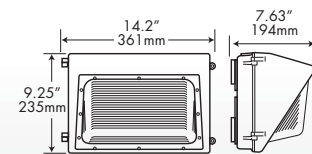

Accessories (Order as separate line items)


- BSP3-277-LC 10KA surge protector
- PH56903 - Button Photocell (120-277V)



BSP3-277-LC

PH56903

120W

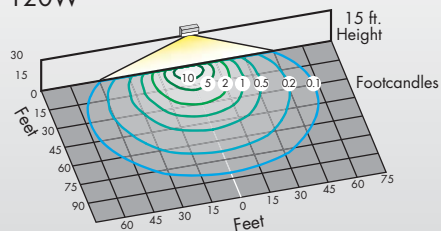

120W

Weight: 22 lbs (9.98 kg)

