

SYLVANIA Luminaires

UltraLED™ CCT and Lumen Selectable Wrap

Application

Offered in two high efficacy wattage packages and one lumen selectable package, these CCT selectable fixtures provide increased energy savings as well as greater design flexibility when compared to traditional sources. The UltraLED wrap luminaire is ideal in retail, manufacturing, warehouse, office, and educational environments.

Benefits and Features

- Diffuse acrylic lens delivers smooth, even illumination
- CCT selectable (3500K, 4000K or 5000K color temperature)
- Lumen selectable (22, 28, 34 or 44 watt) or dedicated 22W and 68W versions available for rebate and high wattage opportunities
- Innovative lens design eliminates LED pixilation and light-leaks on all sides of the fixture while still enabling simple, toolless removal of the lens during installation
- Internally mounted motion/daylight sensor and battery back up options increase the versatility of this product line
- DLC 5.1 listing maximizes rebate opportunities
- Up to 130 LPW
- CRI >80
- Energy savings up to 43%
- Optional 8W battery back-up on 4' products provides 1000 lumens for 90 minutes

Electrical

- 120-277VAC
- 12V auxiliary output
- Power factor >90%
- THD <20%
- 0-10V dimmable down to 10%
- UL damp rated

Rated Life

- 100,000 hours (L₇₀)

Warranty

- 5-year
- NLB Trusted Warranty Program

Ambient Operating Range

- -4°F to +104°F (-20°C to +40°C)



Wattage Comparison

Size	Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
2'	1x32W Fluorescent	28	22	21%
4'	1x32W Fluorescent	28	22	21%
4'	2x28W Fluorescent	49	28	43%
4'	2x28W Fluorescent	49	34	31%
4'	2x32W Fluorescent	56	44	21%
4'	2x54W Fluorescent	87	68	22%

Certifications and Listings

- cULus
- FCC
- RoHS
- DLC 5.1

Installation

- Luminaire can be surface mounted or suspended via included V-hook
- Optional joiner bracket facilitates end-to-end mounting



Ordering Guide

WRAP	2A	/ X	XXX	UNV	D	8	SC7	/ XX	U	/ WH	/ XX
Product Name	Generation	Lumen	Wattage	Voltage	Dimming	CRI	Color Temp	Length	Mounting	Color/Finish	Options
WRAP = Wrap	2A = Generation	Selectability	022 = 22 Watts	UNV =	D = 0-10V	8 = >80	SC7 = Selectable	24 = 24"	U = Universal	WH = White	blank= No option
Luminaire	2A	S = Lumen selectable	044 = 44 Watts	120-277V	dimming		CCT of 3500K, 4000K or 5000K	48 = 48"	mounting		D = Motion/daylight sensor
		blank = Fixed wattage	068 = 68 Watts								E = Emergency battery back-up
											DE = Motion/daylight sensor + emergency battery back-up

Ordering Information


Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp	Size	Total Fixture Lumens	LPW	DLC	Options	MTO*
62176	WRAP2A/022UNVD8SC7/24U/WH	22	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	2ft	2860	130	5.1	—	—
62177	WRAP2A/022UNVD8SC7/48U/WH	22	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860	130	5.1	—	—
62178	WRAP2A/S044UNVD8SC7/48U/WH	22, 28, 34, 44	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860/3640/4420/5720	130	5.1	—	—
62179	WRAP2A/068UNVD8SC7/48U/WH	68	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	8840	130	5.1	—	—
65603	WRAP2A/022UNVD8SC7/24U/WH/D	22	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	2ft	2860	130	5.1	Motion/Daylight Sensor	MTO
65604	WRAP2A/022UNVD8SC7/48U/WH/D	22	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860	130	5.1	Motion/Daylight Sensor	MTO
65605	WRAP2A/S044UNVD8SC7/48U/WH/D	22, 28, 34, 44	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860/3640/4420/5720	130	5.1	Motion/Daylight Sensor	MTO
65606	WRAP2A/068UNVD8SC7/48U/WH/D	68	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	8840	130	5.1	Motion/Daylight Sensor	MTO
65607	WRAP2A/022UNVD8SC7/48U/WH/E	22	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860	130	5.1	Emergency Battery Back-up**	MTO
65608	WRAP2A/S044UNVD8SC7/48U/WH/E	22, 28, 34, 44	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860/3640/4420/5720	130	5.1	Emergency Battery Back-up**	MTO
65609	WRAP2A/068UNVD8SC7/48U/WH/E	68	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	8840	130	5.1	Emergency Battery Back-up**	MTO
65610	WRAP2A/022UNVD8SC7/48U/WH/DE	22	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860	130	5.1	Motion/Daylight Sensor + Emergency Battery Back-up**	MTO
65611	WRAP2A/S044UNVD8SC7/48U/WH/DE	22, 28, 34, 44	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	2860/3640/4420/5720	130	5.1	Motion/Daylight Sensor + Emergency Battery Back-up**	MTO
65612	WRAP2A/068UNVD8SC7/48U/WH/DE	68	120-277	0-10V	>80	3500K, 4000K or 5000K Selectable	4ft	8840	130	5.1	Motion/Daylight Sensor + Emergency Battery Back-up**	MTO

*Made To Order

**Emergency Battery back-up provides 1000 lumens for a period of 90 minutes


Physical Information

Lamp Description	(A) Length in (mm)	(B) Width in (mm)	(C) Height in (mm)
2' Versions	23.9 (607)	9.37 (238)	2.79 (70.9)
4' Versions	47.9 (1216.7)	9.37 (238)	2.79 (70.9)

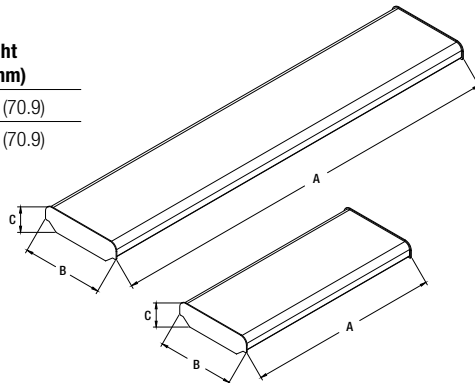


Photometric Information


22W

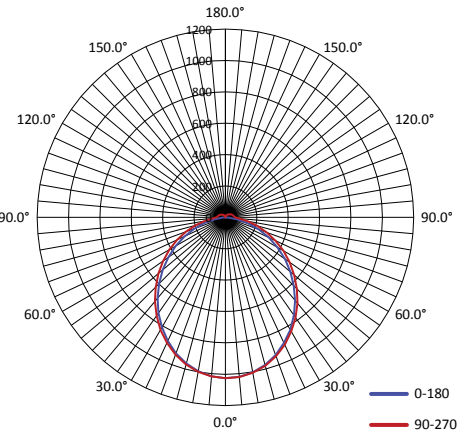

44W

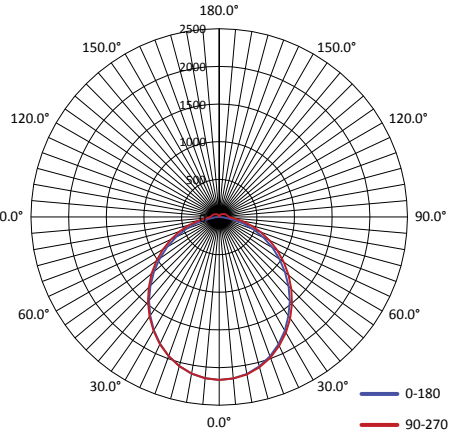


68W

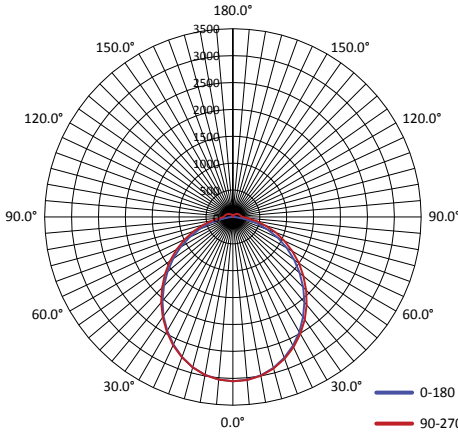

Selector Switches

- CCT Switch can be set to 3500K, 4000K or 5000K
 - Default setting is 4000K
- Wattage Selector can be set to 22, 28, 34 or 44 watts
 - Default setting is 44 watts




Accessories

Item Number	Ordering Abbreviation	Item Description
62241	WRAP2A/JOINBRKT	End-to-End Joiner Bracket
60105	HIBAY2A/REMOTE	Standard Remote Control for Sensor
65305	STRIP2A/REMOTE	Remote Control with Digital Readout for Sensor
60573	LNHIBA2A/CHAINMT	Chain Mount (5 foot, 1 pair)
60574	LNHIBA2A/ACCABLEMT	Cable Mount (5 foot, 1 pair)

65305
Sensor
Remote



62241 Joiner Bracket

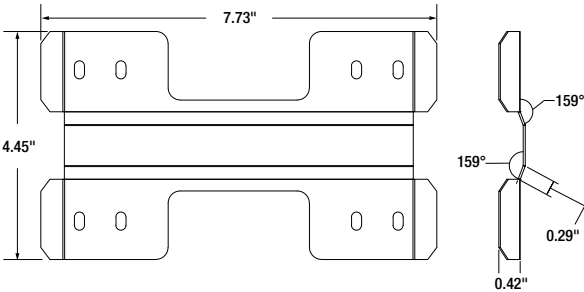


Sensor Options Information


Default Sensor DIP Switch Settings

- Detection Area: 100%
- Hold Time: 5 minutes
- Daylight Threshold: 50 Lux
- Stand-by Period: 60 minutes
- Stand-by Dimming: 30%

Detection Range

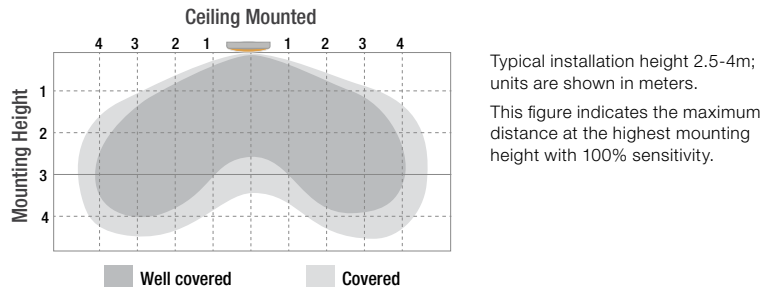

DIP Switch Settings

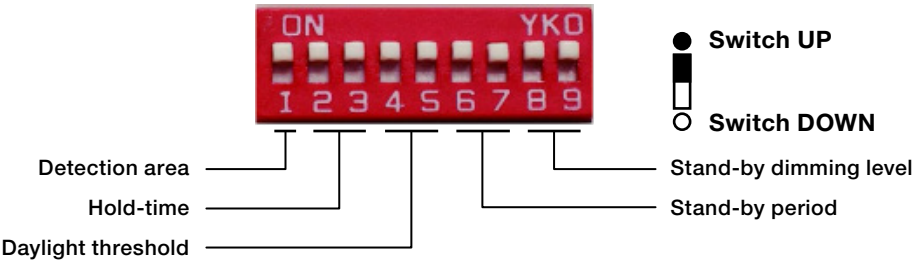

●	100%
○	50%

Detection area
In this area, movement will be detected and able to trigger the sensor. 100% detection area is also known as the strong sensitivity.

●	●	1min
●	○	30min
○	●	60min
○	○	+ ∞

Stand-by period
The period of light keeping low output before it's completely switched off. When it's preset as "∞", the light always keep at low output if no movement in the detection area and doesn't turn off.

●	●	10s
●	○	1min
○	●	5min
○	○	10min

Hold-time
The period of light keeping 100% brightness after moving objects leave the detection area.

●	●	10%
●	○	20%
○	●	30%
○	○	50%

Stand-by dimming level
The definition of low output in the standby period.

●	●	Disable
●	○	50lux
○	●	30lux
○	○	10lux

Daylight threshold
Definition of the ambient brightness; only when the ambient brightness is lower than the preset specific lux amount, the sensor will work; when it's preset as "disable", the sensor works everytime it detects motion regardless the ambient brightness.

Optional LEDVANCE LINK™ Accessories

Field Installable compatible components



Benefits and Features

- The LEDVANCE LINK Bluetooth® Mesh Low Voltage components use Bluetooth technology for easy and secure wireless communication
- Enables regular LEDVANCE luminaires to become Bluetooth enabled and allows for luminaires to be turned on/off and dimmed (manual or auto)
- Components can be used up to 40ft height
- Control using either the LEDVANCE LINK™ smart phone app or the wireless wall switch



Ordering Information

Item Number	Ordering Abbreviation	Description
63631	POWERPACKOUT2.5AUNVBLE	Bluetooth Mesh Power Pack – Internally BLE enables fixture
62630	ADAPTER/AUX12V/BLE	Bluetooth Mesh low voltage controller – Externally BLE enables fixture (requires 12V supply)
62634	SENSORHB/PIRAUX12V/BLE	Bluetooth Mesh low voltage sensor & controller Bluetooth – Externally BLE enabled daylight/motion sensor (requires 12V supply)

Click or scan QR code for more information on LEDVANCE LINK



COMMISSIONING GUIDE



62630



62634



63631

Compatible Products

Item Number	Ordering Abbreviation	Description
62636	WALLSWITCH5KEYBLE	Bluetooth Mesh Low Voltage 5 Button Switch
62637	SIDEADAPTERAUX	3.5mm Pin L-shaped Receptacle




Physical Information


LINK CONTROLLER (62631) mounts on a ½" knock out.



LINK CONTROLLER (62630 + 62637) mounts on a ½" knock out.



LINK SENSOR/CONTROLLER (62634 + 62637) mounts on a ½" knock out.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
The Bluetooth® word mark and logos are registered
trademarks owned by the Bluetooth SIG, Inc. and any
use of such marks by LEDVANCE LLC is under license.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA

