


LTR	REVISION	DATE	APPD
C	082313-GP01: ADDED LIFE EXPECTANCY	09-04-13	GP

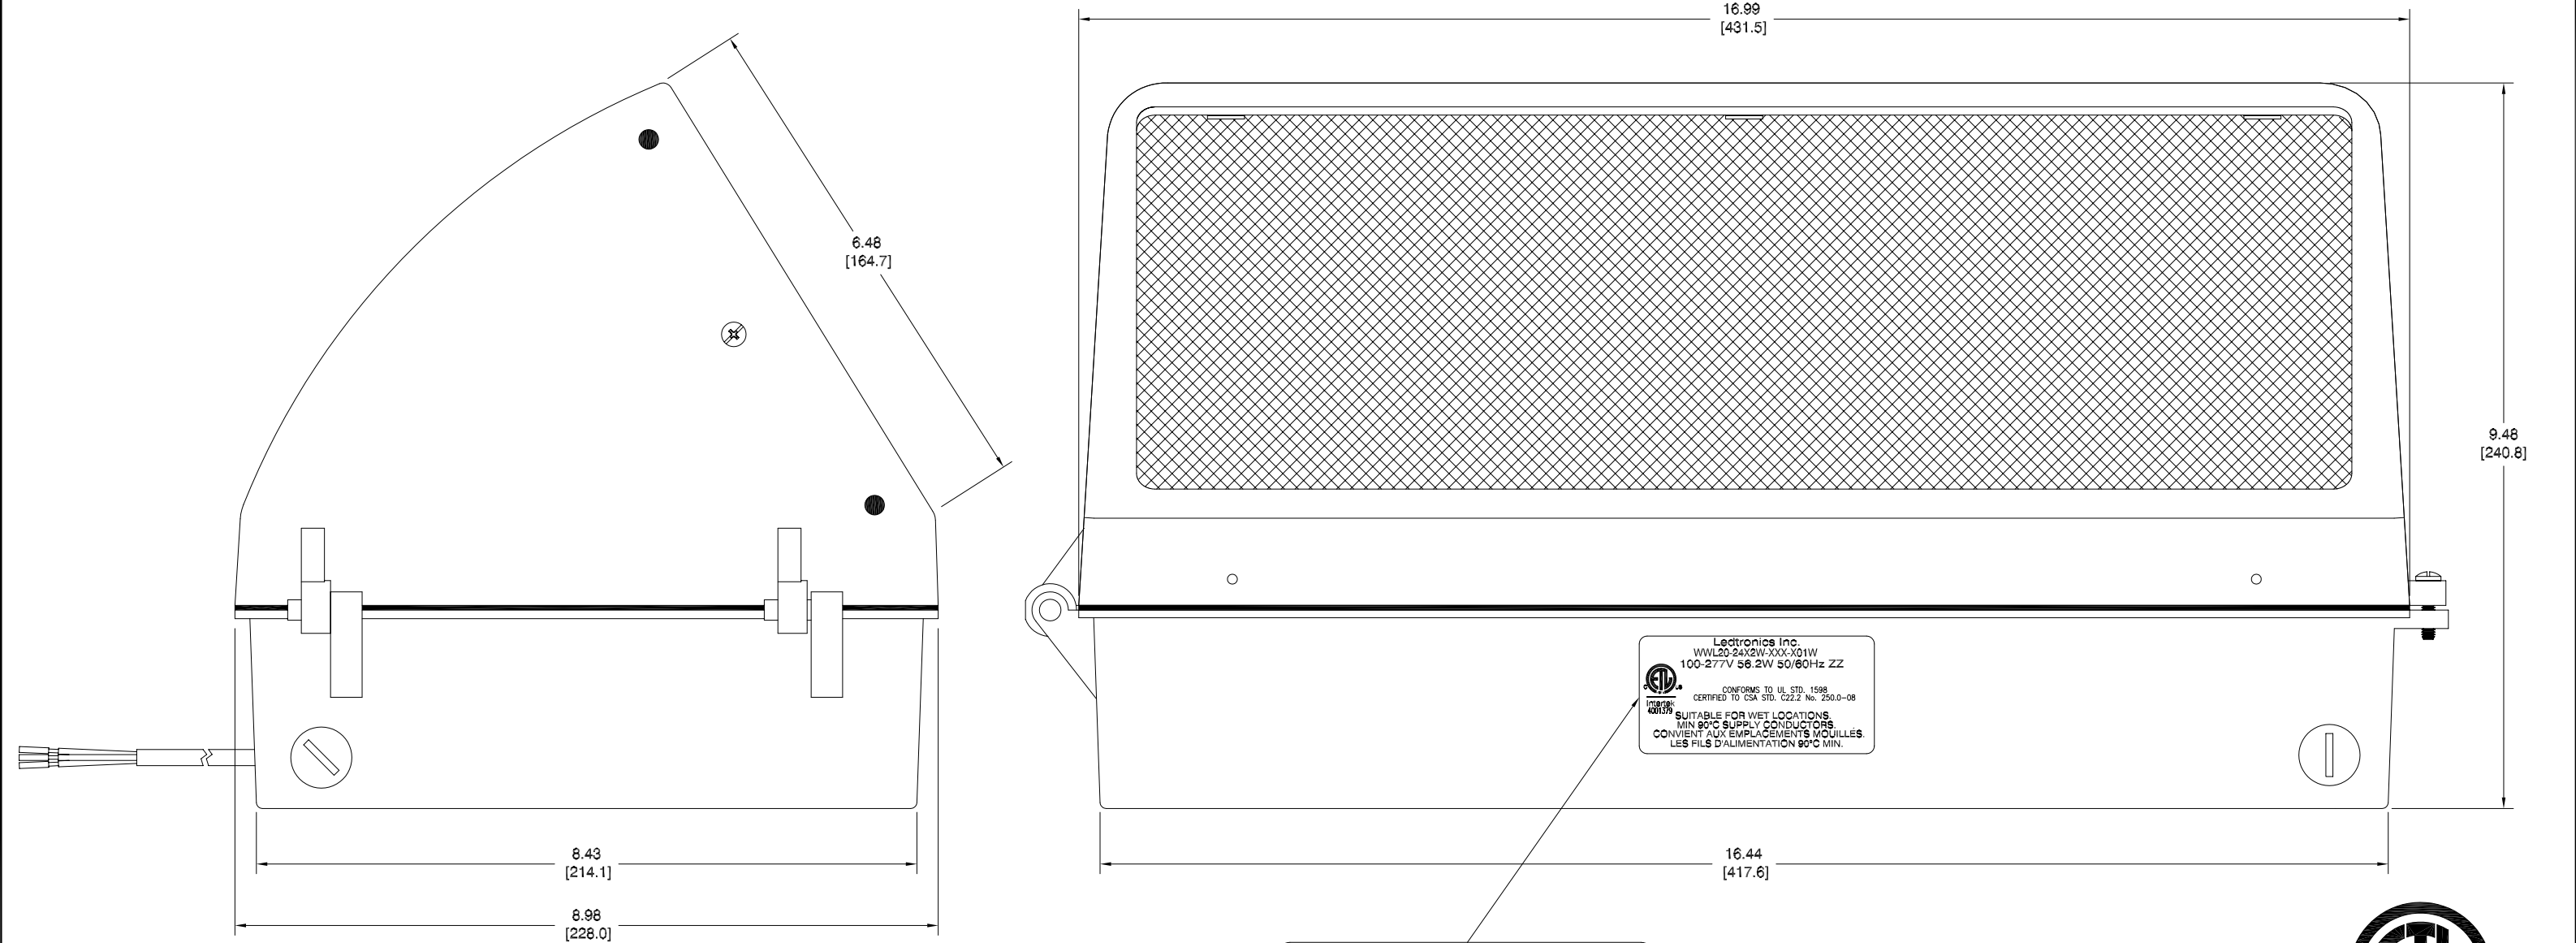

- NOTES:
- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
 - Intertek ETL file 100086558LAX-001a, Issued: 27-Jul-2010.
 - WEIGHT: 13.5 lbs. / 6.1 kg.
 - LIFE EXPECTANCY-BASED ON 12 HRS/DAY = 11.4 YEARS

HOUSING:
DIE-CAST-ALUMINUM HOUSING AND HINGED
FRONT FRAME, 1/2" COIN PLUGS WITH O-RINGS
FOR CONDUIT AND PHOTOCELL, TEXTURED
ARCHITECTURAL BRONZE POWDERCOAT FINISH
(SILVER POWDERCOAT FINISH FOR WWL20-24X2W-XPW-101)
OVER A CHROMATE CONVERSION COATING.

LENS:
CLEAR PRISMATIC ACRYLIC (UL FLAME RATED MIN. 94HB)

ELECTRO-OPTICAL CHARACTERISTICS

WWL20-24X2W-XIW-001W	WARM WHITE	100-277VAC	0.482 A	55.6 W	41.5	2305 lm	1415cd	circular beam 30° to vertical	85	3000K	0.96
WWL20-24X2W-XPW-001W	PURE WHITE	100-277VAC	0.474 A	56.2 W	54.7	3075 lm	1566cd	circular beam 33° to vertical	76	5500K~6350K	0.96
WWL20-24X2W-XPW-101W	PURE WHITE	100-277VAC	0.474 A	56.2 W	54.7	3075 lm	1566cd	circular beam 33° to vertical	76	5500K~6350K	0.96
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V (TESTED @ 120VAC)	CURRENT (A)	POWER (W)	EFFICACY lm/W	TOTAL LUMENS	MAXIMUM CANDELA	ILLUMINATION PATTERN	CRI	COLOR TEMP. (K)	POWER FACTOR



REVISION NOTIFICATION	
☐ DLC	
☒ UL/ETL	
☒ MADE IN USA	
☐ CUSTOMER _____	
☐ OTHER	

	LED[®] LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.	TITLE WWL20-24X2W-XXW-X01W						
		DWG NO WWL20001—CUST		SCALE 1:2		SHEET 1 OF 1		DATE 06—23—10	
		CODE IDENT NO. 8Z410	DWG BY GP 06—26—10	CHK BY	QA RD 09—11—13	MFG LD 09—11—13	R&D BJ 09—11—13		