



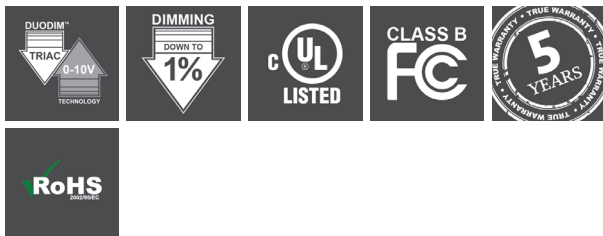

XEL-030DEU DuoDim™ Commercial Series

10~30W LED Driver Family
0-10V & TRIAC/ELV, 5%/1% Dimming

Nominal Input Voltage (V _{in})	Family Output Power Range (W)	Output Voltage Range (V _{out})	Output Current Range (A)	Efficiency (%)	UL Max Case Temp. T _c (°C)	THD (%)	Power Factor	Dimming Method	Dimming Range (%)
120~277V _{ac}	8~30W	24~32V _{dc} 26~42V _{dc}	0.30~0.70A	≤ 88% (typical)	90°C	< 20%	> 0.9	0-10V & TRIAC/ELV	5/1-100% (% of lout)

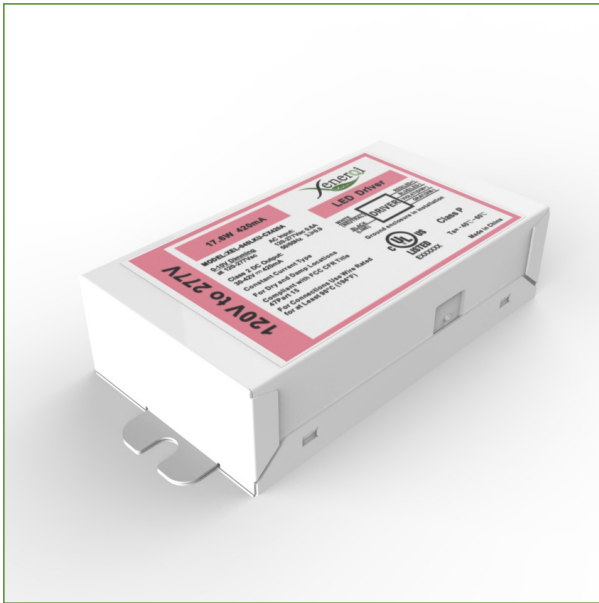

Variants available:



- Side Exit Wires
- Thermally Enhanced Bottom Exit Wires
- Thermally Enhanced Side Exit Wires
- 30~40W DuoDim™

XEL-030DBU
XEL-030DDU
XEL-030DAU
XEL-040D Series

- ✔ **Ideal for Residential & Commercial Lighting**
- ✔ **Optimized for COB's**
- ✔ **Indoor or Outdoor use**
- ✔ **Universal AC input (108~305Vac)**
- ✔ **DuoDim™ Technology (0-10V & TRIAC)**
(Optional TRIAC only, 1% Phase Dimming)
- ✔ **Enables Energy Star & DLC compliant fixtures**
- ✔ Turn on/off in less than 500 milliseconds
- ✔ Built-in Commercial grade Surge protection
- ✔ Class P UL Driver
- ✔ Class A Noise Rating
- ✔ Integrated over voltage & open load, over current, short circuit & temperature protection
- ✔ Turn on & Full power operation between -30°C to +60°C ambient ¹
- ✔ XenerQi Industry Leading 5 Year True Warranty™ ²
- ✔ Class 2 power supply
- ✔ Complies to FCC CFR Title 47 Part 15


See product specific data pages for details.

Typical Applications

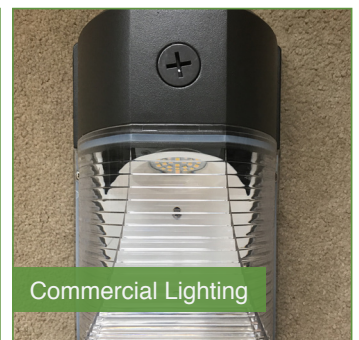

Mechanical Drawings-Dimensions

(not to scale)

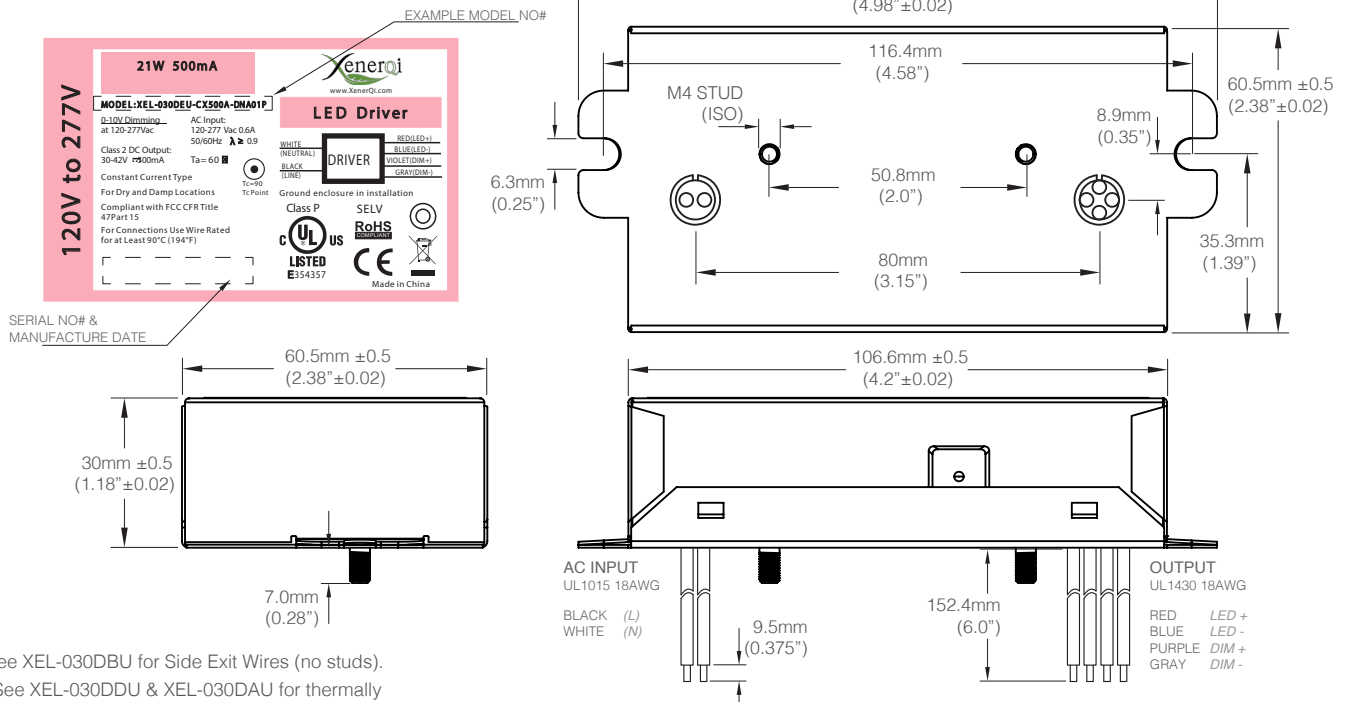

Case		Wire Dimensions	
Material	Steel	Wire Gauge	18AWG
Unit Weight	See variant pages for details ⁸	Wire Length	152.4mm (±3mm) / 6" (±0.12")
Dimensions	126.5mm x 60.5mm x 30mm / 5.0" x 2.4" x 1.2"	Strip Length	9.5mm (±0.5mm) / 0.375" (±0.02")
Recommended Fixings 2x M6*8mm / 12-24*5/15" Fasteners			




Installation Guide

Mounting & Wiring Diagrams



WARNING: TO REDUCE THE RISK OF FAILURE / INJURY:
DRIVER MUST BE INSTALLED IN LUMINAIRE AND GROUNDED IN ACCORDANCE WITH THE LOCAL CODES.
DRIVER CASE MUST BE ELECTRICALLY GROUNDED.
FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY AND/ OR DAMAGE TO THE SYSTEM.

Fix using 2 M6 screws for recommended mounting.

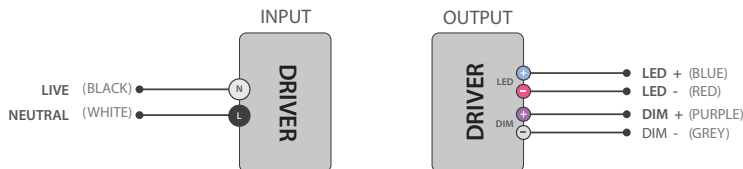

Wires	Colors	Type	Wires	Colors	Type
Input	White (Neutral)	UL1015 AWG 18	Dimming	Purple (Dim +)	UL1015 AWG 18
	Black (Line)	UL1015 AWG 18		Grey (Dim -)	UL1015 AWG 18
Output	Red (Positive)	UL1430 AWG 18			
	Blue (Negative)	UL1430 AWG 18			

Specification Data

Output	Rated Power	30W max
	Optimized Vf Range ⁶	36 ~ 38 Vdc (for 42V max) / 28 ~ 30 Vdc (for 32V max)
	Rated Current Range	0.30 ~ 0.70 A (not dimmed - see specific model pages)
	Line Regulation ³	±5%
	Load Regulation ³	±5%
	Turn On/Off Time	< 500ms (at full load)
Input	Voltage Range ⁴	120 ~ 277Vac Nominal (108 ~ 305Vac Operational)
	Frequency Range	47 ~ 63 Hz
	Power Factor	PFC > 0.9 at ≥ 75% of full power ⁴
	THD	THD < 20% at ≥ 75% of full power ⁴
	Typical Inrush Current	< TBC (per ANSI test method. Compliant with NEMA410-2015)
Dimming	Mode A (0-10V)	DC Dimming control: 0-10Vdc (5%) Sink / Source
	Mode B (Phase cut)*	TRIAC/ELV Phase cut dimming (1%)
	TRIAC Support	Forward Reverse Phase & ELV Dimmers
	0-10V Source Current	260µA (Isolated)
	Compatibility	IEC Compliant
Protection	Short Circuit	Auto-restart (after fault removed)
	Over Voltage & Open Load	Vout < 60V (Class-2)
	Over Current	Inherently limited over operational range
	Over Temperature	Current foldback at hotspot greater than 85°C (shut down at <100°C) ⁵
Environment	Working Temperature	-30°C ~ 60°C ambient ¹ (T _{case} rated for 90°C)
	Working Humidity	20% ~ 90% RH non-condensing
	UL Rating	Dry / Damp location use
	Storage Temperature	-40°C ~ 85°C ambient
	Storage Humidity	10% ~ 90% RH non-condensing
	Impact Resistance	1 g/s
	Vibration	3 ~ 50Hz 1g (for 30 minutes)
	Operating Life	50,000 Hours at Full Load & Maximum Hotspot
Safety & EMC	Safety Standards	UL8750, Class 2 (UL1310), Class P rated
	Noise Rating	Class A (Less than 24dB measured at 1 meter) ^{3,7}
	EMI Conduction & Radiation	Compliant with FCC CFR Title 47 Part 15 Class A at 120/277Vac & Class B at 120V Compliant with European CE requirements
	EMC Susceptibility	EN61000-4-3, EN61000-4-2, EN61000-4-4
	Transient Immunity	2kV/1kA Combination, 2.5kV Ringwave Modes: L-N, L-G, N-G

¹ Ambient is estimated. Actual temperatures determined by trigger point temperature at driver hotspot. Assumed case is mounted on flat surface.

² True Warranty refers to operation at full load and max hotspot temperature. For specific warranty details refer to XenerQi published warranty document.

³ Guaranteed only within nominal input range.

⁴ Critical parameters guaranteed over nominal input range.

⁵ Shutdown requires power cycle to recover.

⁶ Units optimized for steady state forward voltage as per "Optimized Vf Range" value in specification data, and for specific LED loads.


List of LED loads available upon request.

⁷ Tested under two conditions: with & without dimmer connected.

⁸ Value listed is family maximum or minimum best case value as appropriate & can vary depending on part number.

^{*} Dimming performance may vary depending on brand and make of dimmer used as well as number of drivers connected to it.

Operation Performance-Family

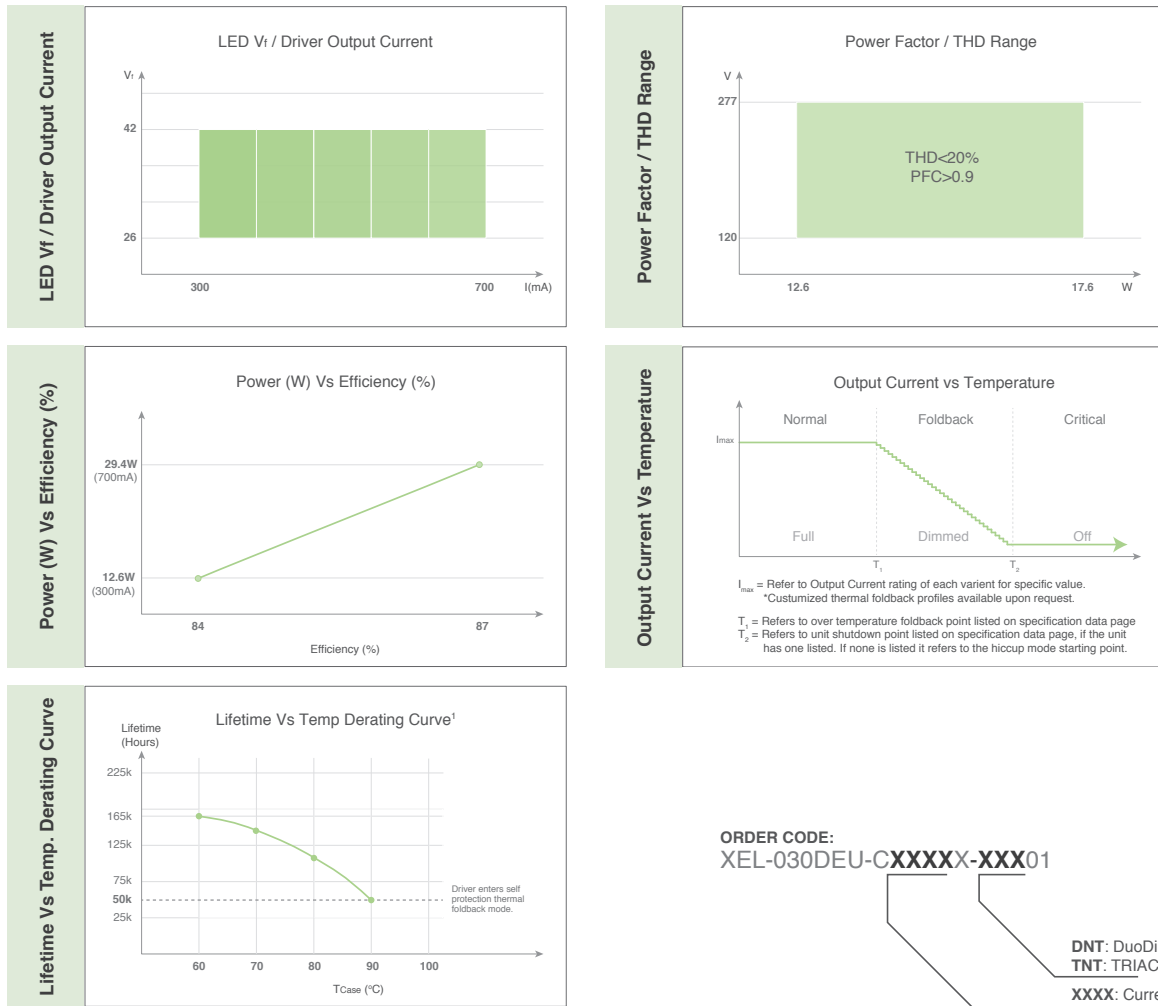

ORDER CODE:
XEL-030DEU-CXXXXX-XXX01

DNT: DuoDim™
TNT: TRIAC Only
XXXX: Current Rating
(See Available Model Table)

Available Models

	Part Number	Output Current (mA)	Output Voltage Range (V)	Maximum Efficiency ⁶	Max Output (W)
Fixed Output Current Variants (TRIAC)	XEL-030DEU-CX700G-TNT01	700	26 ~ 42	TBC	29.4W
	XEL-030DEU-CX650K-TNT01	650	24 ~ 32	TBC	14.4W
	XEL-030DEU-CX450K-TNT01	450	24 ~ 32	TBC	10.9W
	XEL-030DEU-CX400G-TNT01	400	26 ~ 42	TBC	16.8W
	XEL-030DEU-CX340K-TNT01	340	24 ~ 32	TBC	14.4W
	XEL-030DEU-CX200G-TNT01	200	26 ~ 42	TBC	8.4W
Fixed Output Current Variants (DuoDim™)	XEL-030DEU-CX700-042-DNT01	700	26 ~ 42	87%	29.4W
	XEL-030DEU-CX600-042-DNT01	600	26 ~ 42	TBC	25.2W
	XEL-030DEU-CX550-042-DNT01	550	26 ~ 42	87%	23.1W
	XEL-030DEU-CX500-042-DNT01	500	26 ~ 42	84%	21.8W
	XEL-030DEU-CX450-042-DNT01	450	26 ~ 42	85%	18.9W
	XEL-030DEU-CX350-042-DNT01	350	26 ~ 42	84%	14.7W
	XEL-030DEU-CX315-042-DNT01	315	26 ~ 42	85%	13.2W
	XEL-030DEU-CX250-042-DNT01	250	26 ~ 42	84%	10.5W
	Customized Variants available upon request.				

The information and specifications contained in this summary sheet are believed to be accurate and reliable at the time of publication, however Xenerqi Limited assumes no responsibility for damages caused due to potential errors. Also, Xenerqi Limited assumes no responsibility for the use of this product in such a way that it infringes on patents or other rights of third parties. No license is granted by implication or otherwise under any patent rights of Xenerqi Limited. Specifications are subject to change without notice. Data values may have been rounded for marketing purposes.