

Solais Lighting | XFR11 1-Head Fully Recessed Multiple

Solais LED Recessed Multiple Fixture

Product Description: The Solais Fully Recessed Multiples adjustable accent fixture excels in high-performance lighting applications that demand the lumen output, center beam candle power and color rendering needed in high-end retail and commercial applications.

Performance Summary: Fully dimmable | Certified to UL Standards | RoHS-compliant | Contain no lead or mercury | Dry location rating

Application: Designed for use in new construction ceiling only.

Voltage: 120v Standard

CCT: 2700K, 3000K, 3500K*, 4000K*

Dimmable: Yes - Visit solais.com/dimming.php for compatibility list

Weight (lbs): 4.6

Ceiling Cut-Out: 5.96"x4.9"

Life: 50,000 Hours (L70)

Module Base Type: GU-24



Module Code	Power (Watts)	Beam Angle	CCT (K)	Lumen Output	CBCP (cd)	CRI
Xm24/15/30K/2400/_ _	28	15°	3000	2400	16400	85
Xm24/25/30K/2400/_ _	28	25°	3000	2400	10200	85
Xm24/40/30K/2400/_ _	28	40°	3000	2400	4000	85
Xm24/15/27K/2300/_ _	28	15°	2700	2300	15600	85
Xm24/25/27K/2300/_ _	28	25°	2700	2300	9700	85
Xm24/40/27K/2300/_ _	28	40°	2700	2300	3800	85
Xm24/15/30K/1600/_ _	19	15°	3000	1600	13100	85
Xm24/25/30K/1600/_ _	19	25°	3000	1600	8150	85
Xm24/40/30K/1600/_ _	19	40°	3000	1600	3200	85
Xm24/15/27K/1550/_ _	19	15°	2700	1550	12700	85
Xm24/25/27K/1550/_ _	19	25°	2700	1550	7900	85
Xm24/40/27K/1550/_ _	19	40°	2700	1550	3100	85
Xm20/15m/30K/1450/_ _	17	15°	3000	1450	11875	83
Xm20/25m/30K/1450/_ _	17	25°	3000	1450	7400	83
Xm20/40m/30K/1450/_ _	17	40°	3000	1450	2900	83
Xm20/15m/27K/1400/_ _	17	15°	2700	1400	11450	83
Xm20/25m/27K/1400/_ _	17	25°	2700	1400	7150	83
Xm20/40m/27K/1400/_ _	17	40°	2700	1400	2800	83
Xm20/15/30K/1100/_ _	15	15°	3000	1100	8600	83
Xm20/25/30K/1100/_ _	15	25°	3000	1100	5350	83
Xm20/40/30K/1100/_ _	15	40°	3000	1100	2100	83
Xm20/15/27K/1050/_ _	15	15°	2700	1050	8200	83
Xm20/25/27K/1050/_ _	15	25°	2700	1050	5100	83
Xm20/40/27K/1050/_ _	15	40°	2700	1050	2000	83

* Special Order


Fixture Images



Shown with Xm20 module



Shown with Xm24 module

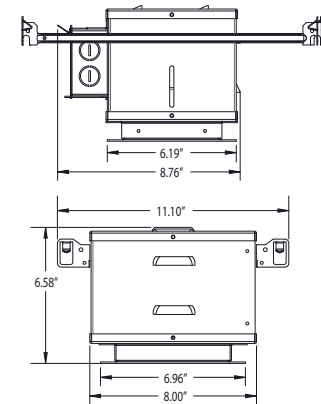

Beam Angles



15°



25°



40°

Color Temperature



2700K

3000K

3500K*

4000K*

Housing Colors



White

Silver*

Black

Solais Lighting | XFR11 1-Head Fully Recessed Multiple

Ordering Information

Example: XFR11/Xm20/25/30K/1050/WH/WH/SN

XFR11	/	/	/	/	/	/	/
Fixture XFR11 (1-Head Fully Recessed Multiple)	Module Xm20	Beam Spread 15 25 40	CCT / Lumens		Interior & Module Finish WH - White BK - Black	Trim Finish WH - White BK - Black	Accessories (If desired) See Accessory Sheet
			27K / 1050				
			30K / 1100				
		35K* / 1100					
		40K* / 1100					
		15m 25m 40m		27K / 1400			
			30K / 1450				
			35K* / 1450				
			40K* / 1450				
	Module Xm24	15 25 40	27K / 1550				
			30K / 1600				
			35K* / 1600				
		40K* / 1600					
		27K / 2300					
		30K / 2400					
		35K* / 2400					
		40K* / 2400					

* Special Order



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.



Thermal Throttle – In the event that Solais LEDs become overheated, they will dim themselves to protect your technology investments.

LIMITED WARRANTY: Solais Lighting warrants that our lamps and fixtures will operate for a period of five (5) years from the date of purchase or 25,000 hours, whichever comes first, when used in accordance with package and lamp directions. If your Solais product does not last for the warranty period, please send your name and address, the product you are returning, register receipts and proof of purchase to the address listed on our website. This limited warranty does not cover products subject to misuse, electrical current fluctuation, accident, neglect, or acts of God. THIS REPLACEMENT OR REPAIR IS THE SOLE WARRANTY OBLIGATION OF SOLAIS AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LIABILITY FOR INCIDENTAL AND CONSEQUENTIAL DAMAGES EXCLUDED.

For complete warranty terms and conditions, please see: www.solais.com/warranty

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**

