

Part No.

XTC32-700-UNV-A

LED Driver Type	Constant Current
Input Voltage	108-305VAC, 50/60Hz
Dimming	Trailing Edge Dimmable

XSERIES
LED DRIVERS

ELECTRICAL SPECIFICATIONS

INPUT	
Max. Current	315mA @ 120V, 147mA @ 277V
Power Factor	> 0.9
Efficiency	> 84%
OUTPUT	
Max. Power	32W
Current	700mA
Voltage	24-45V
Max. Case Temp.	80°C

FEATURES:

- SELV
- Short Circuit Overload & Open Load Protection
- Over Voltage & Over Current Protection - Auto Recovery
- Surge Protection
- Trailing Edge Dimmable at 120V Only
- Lifetime 50,000 hrs @ 80°C
- Case Material: Polycarbonate

APPLICATIONS:

- Track Lighting
- Recessed Lighting
- General Illumination
- Commercial Lighting
- Architectural Lighting

APPROVALS:

CERTIFICATIONS




LIMITED WARRANTY:

5 years


PHYSICAL DIMENSIONS:

- Length (L): 3.79"
- Width (W): 1.62"
- Height (H): 1.00"

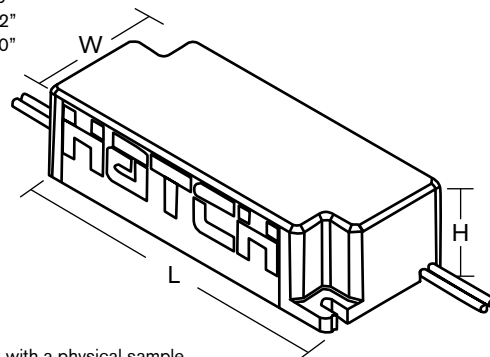


Always confirm fit with a physical sample

WIRING DIAGRAM:

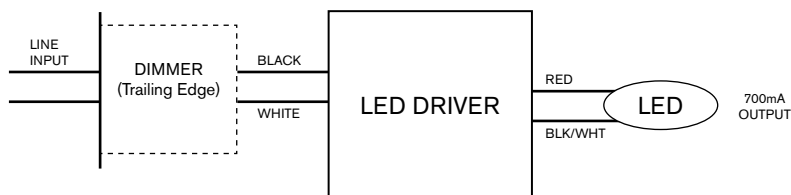

WARNING: Always connect LED load prior to energizing driver.

T_C POINT LOCATION:

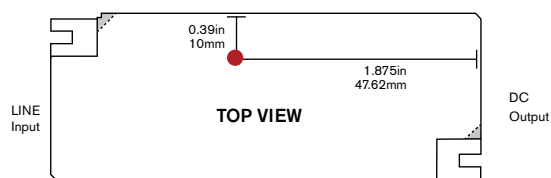

Specifications subject to change without notice.