

11-1082

B

A



B

C

D

E



Case Material:LN-1250G, V - 0, rated 115 deg C,
manufacturer Teijin Chemicals Ltd. UL no:E195100

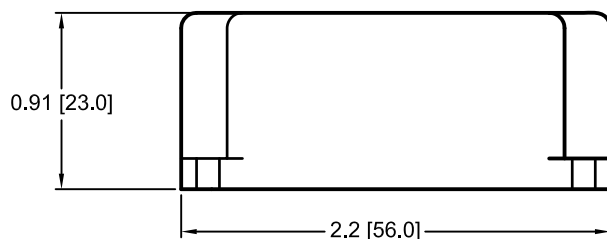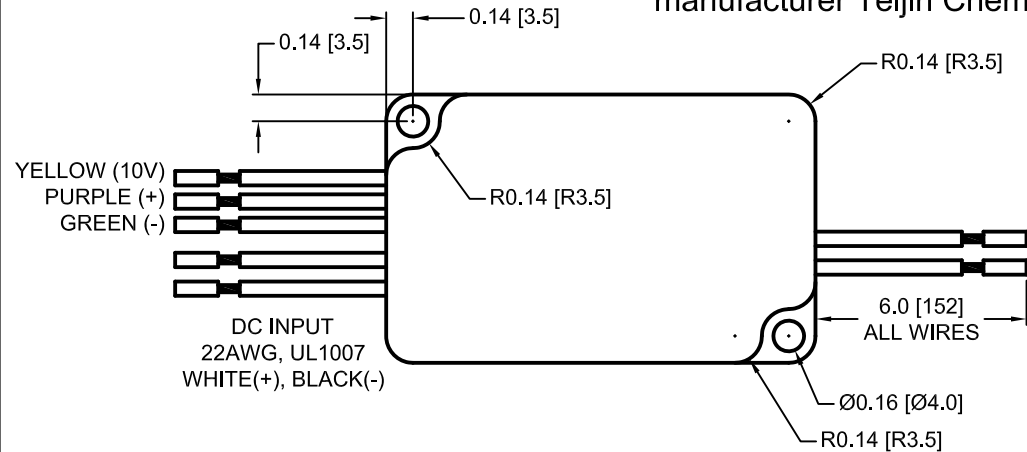

Specifications :

Input Range : 15~20Vdc
DC Output Range : 1.6A CC, 5~15Vdc
Efficiency : 90% Tpy.
Output Current Regulation : ±5%
Protection : SCP - Auto Recovery
Minimum dimming 5%
Dimming via current control
Dimming Source (Yellow wire) : Capable of up to 10 units
Dimming current draw: < 0.5mA , 10V output : 7.5mA
Operation Temp. : -40C ~ +50C , Tc : 70C
Storage Temp. : -40C ~ +85C
MTBF(@25℃) : >100,000 Hours, MIL-217F
FCC A,IP66 , NEMA4.
Weight : 80 Grams Typical


DC OUTPUT
22AWG, UL1007
RED(+), BLACK(-)

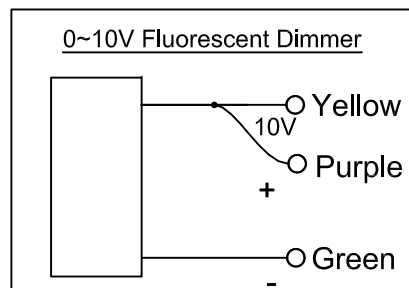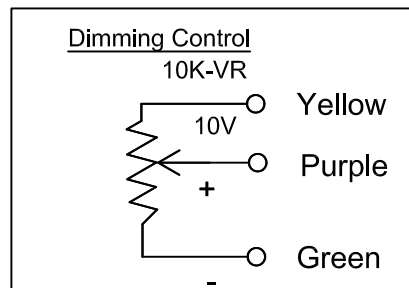

Notes:

- 1.- Case Material:LN-1250G, V - 0, rated 115 deg C,
manufacturer Teijin Chemicals Ltd. UL no:E195100
- 2.- MAGTECH PROVIDES 5 YEARS WARRANTY

REVISIONS		
REV	DESCRIPTION	DATE
B0	CHANGED PER ECN 09-019	12/02/2009
A3	MATCH LABEL INFORMATION ON SAPLES	8/28/2009
A2	CHANGED PER ECN 09-015	6/24/2009
A1	MATCH LABEL INFORMATION ON SAMPLES	6/23/2009
A0	RELEASE TO PRODUCTION	5/11/2009

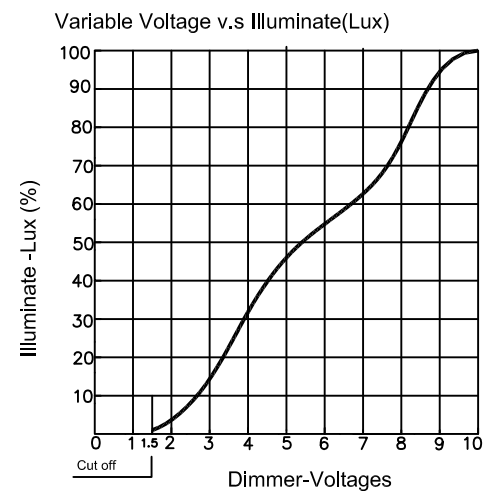



HIGH PERFECTION TECH.
www.highperfection.com.tw

Model: CC3512H-1600 RoHS
P/N: 11-1082 REV: B
DC INPUT: 15 - 20Vdc
DC OUTPUT: 5 - 15Vdc / 1.6A CC
DIMMING : Yellow: 10V OUTPUT
Purple: 0-10V INPUT
GREEN: RET
S/N: 0907128962
INPUT OUTPUT
BLK- / WHT+ MADE IN TAIWAN RED+ / BLK-

25W max.

Juno lighting

THIS ITEM IS THE PROPERTY OF PFC CORPORATION AND CONTAINS PROPRIETARY CONFIDENTIAL AND TRADE SECRET INFORMATION. THE INFORMATION CONTAINED HEREIN MUST NOT BE USED, DISCLOSED OR REPRODUCED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN CONSENT FROM PFC CORPORATION.						
UNLESS OTHERWISE SPECIFIED		APPROVAL DATE 4/22/2009				
DIMENSIONS IN INCHES [MM]						
TOLERANCES: X DECIMALS± .05 [1.3] .XX DECIMALS± .02 [0.5] .XXX DECIMALS± .005 [0.13] ANGLE± 1° FRACTIONS± 1/16		CHECKED BY				
DO NOT SCALE THIS DRAWING						
INTERPRET DRAWING PER ANSI Y14.5M		TITLE: CN-0197, CC 1.6A@15V, LABELED 25W, 5YRS				
		MODEL NO. CC3512H-1600		DWG NO. M11-1082	REV. B0	SHEET OF 1 1