



Ignitor Specifications (Case Temperature Rating 105°C)

Metal Halide




Metal Halide							Long Range Ignitor			
Ballast Data				Standard Ignitor			Long Range Ignitor			
Philips Advance Ballast Family	Lamp Watts	ANSI Code	Ballast Circuit Type	Catalog Number	Max. Dist. (ft.) To Lamp	Case Type	Catalog Number	Min. Dist. (ft) To Lamp	Max. Dist. (ft) To Lamp	Case Type
71A5005	35	M130	HX	LI533-H4-IC	15	Round	XTENZA® Long-Range Ignitor - Meets ANSI pulse requirements for all ballast to lamp distances from 0 to 50 ft. - Features 105°C case temperature rating - See Ordering Information Below LI533-LR1 0 - 50 ft Oval  LI533-LR 0 - 50 ft Oval LI533-LR3★ 0 - 50 ft Oval			
71A5105	50	M110/148	HX	LI533-H4-IC	15	Round				
71A511	50	M110/148	HX	LI533-H4-IC	10	Round				
71A5137	50	M110/148	R	LI533-H4-IC	2	Round				
71A5205	70	M98/143	HX	LI533-H4-IC	25	Round				
71A522	70	M98/143	HX	LI533-H4-IC	15	Round				
71A5237	70	M98/143	R	LI533-H4-IC	10	Round				
71A521	70	M139	HX	LI533-H4-IC	10	Round				
71A530	100	M90/140	HX	LI533-H4-IC	20	Round				
71A5383	100	M90/140	CWA	LI533-H4-IC	2	Round				
71A5337	100	M90/140	R	LI533-H4-IC	2	Round				
71A542	150	M102/142	HX	LI533-H4-IC	10	Round				
71A5437	150	M102/142	R	LI533-H4-IC	2	Round				
71A553	175	M137/152	SuperCWA	LI533-H4-IC	2	Oval				
71A562	200	M136	SuperCWA	LI533-H4-IC	2	Round				
71A563	200	M136	SuperCWA	LI533-H4-IC	5	Round				
71A572	250	M138/153	SuperCWA	LI533-H4-IC	5	Round				
71A582	320	M132/154	SuperCWA	LI533-H4-IC	2	Round				
71A593	350	M131	SuperCWA	LI533-H4-IC	2	Round				
71A602	400	M135/155	SuperCWA	LI533-H4-IC	10	Round				
71A61E6	400	M135/155	SuperCWA	LI533-H4-IC	2	Round				
71A633	450	M144	SuperCWA	LI533-H4-IC	5	Round				
71A640	750	M149	SuperCWA	LI573-H5-IC	15	Oval				
71A642	750	M149	SuperCWA	LI573-H5-IC	15	Oval				
71A648	875	M-166	SuperCWA	LI572-H5-IC★	10	Oval				
71A651	1000	M141	SuperCWA	LI572-H5-IC★	10	Oval				
71A653	1000	M141	SuperCWA	LI571-H5-IC★	5	Oval				
71A505	35	M130	HX	LI533-H4-IC	15	Round	LI561-H5★	15	50	Oval
71A5081	35	M130	HX	LI533-H4-IC	15	Round	LI561-H5★	15	50	Oval
71A5037	35	M130	R	LI533-H4-IC	10	Round	LI561-H5★	10	50	Oval
71A520	70	M85	HX	LI522-H5-IC★	30	Oval	Not Available			
71A54A3	150	M102/142	SuperCWA	LI501-J4-IC★	15	Round	Not Available			
71A540	150	M81	HX	LI522-H5-IC★	20	Oval	Not Available			
71A5486	150	M81	CWA	LI523-H5-IC★	2	Oval	Not Available			
71A5880	250	M80	HX	LI522-H5-IC★	5	Oval	Not Available			
71A865	750	**	CWA	LI561-H5-IC★	5	Oval	Not Available			

★ Equipped with an auto-rest thermal protector to help prevent ignitor from overheating in the event of lamp failure

XTENZA Ordering Information

To order in bulk, specify item no. LI533-LR, LI533-LR1 or LI533-LR3. For individual carton, add -IC to item no.


XTENZA is also available packaged with the ballasts shown at right.



Oval Case

Lamp Watts	ANSI Code	Ballast Number	No Bracket	With Welded Bracket
35	M130	71A5005		-910DP
35	M130	71A5081	-900D	
70	M98/143	71A5205		-910DP
70	M98/143	71A5292	-900D	
70	M98/143	71A52A2	-900D	-910D
100	M90/140	71A5383		-910D
100	M90/140	71A5390	-900D	

Round Case



CC125
MOUNTING CLIP for Round Case
(Furnished as standard with -001 suffix ballasts and all -IC suffix replacement ignitors.)




Ignitor Specifications (Case Temperature Rating 105°C)

High Pressure Sodium




High Pressure Sodium									
Ballast Data				Standard Ignitor			Long Range Ignitor		
Philips Advance Ballast Family	Lamp Watts	ANSI Code	Ballast Circuit Type	Catalog Number	Max. Dist. (ft.) To Lamp	Case Type	Catalog Number	Max. Dist. (ft.) To Lamp	Case Type
71A89_0	200	S66	CWA	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A89_1	200	S66	CWA	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A89_7	200	S66	R	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A82_1	250	S50	CWA	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A82_6	250	S50	CWI	LI501-J4-IC	2	Round	Not Available		
71A82_7	250	S50	R	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A8392	250	S50	CWA	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A83_1	310	S67	CWA	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A83_7	310	S67	R	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A84_3	400	S51	CWA	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A84_6	400	S51	CWI	LI501-J4-IC	2	Round	Not Available		
71A84_7	400	S51	R	LI501-H4-IC	2	Round	LI501-J4-IC	50	Round
71A85_6	430	n/a	CWI	LI501-H4-IC	15	Round	LI501-J4-IC	35	Round
71A85_5	600	S106	CWA	LI561-H5-IC	5	Oval	Not Available		
71A85_8	600	S106	CWI	LI561-H5-IC	2	Oval	Not Available		
71A86_5	750	S111	CWA	LI561-H5-IC	5	Oval	Not Available		
71A87_3	1000	S52	CWA	LI571-H5-IC★	15	Oval	LI571-J5-IC★	75	Oval


★ Equipped with an auto-rest thermal protector to help prevent ignitor from overheating in the event of lamp failure.



Round Case

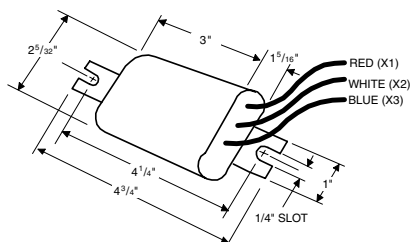

Oval Case



CC125
Mounting Clip for Round Case
(Furnished as standard with -001 suffix ballasts and all -IC suffix replacement ignitors.)