
# CANDELABRA 12 VOLT




PART NUMBER: BRI CAN 12 C XXXX X

- 12 (VAC)
- Clear = C
- KELVIN TEMPERATURE
  - 2200 (2w only)
  - 2700
  - 3000
  - 5000 (2w only)
- WATTAGE
  - 2 (FLAME)
  - 4 (BLUNT)

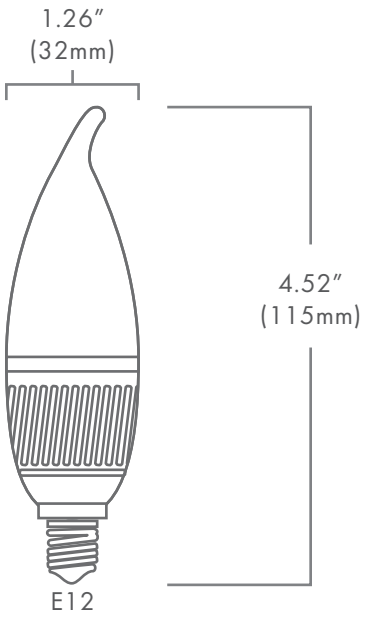

## DESCRIPTION:

This Brilliance LED Candelabra is decorative, dimmable, clear and designed for a 12VAC power system, which can be installed into any standard E12 or E14 socket. It is energy efficient, saving up to 85% on energy costs, vibration resistant, and it features a multi-directional beam pattern making it ideal for many general lighting applications.

## FEATURES:

- UL listed & FCC compliant
- Dimmable with most magnetic transformers
- Environmentally friendly
- Maintenance free
- Candelabra adapter available

| | |
|---|---|
| Wattage | 2 or 4 |
| Lumens | 100, 200 |
| Beam Spread | 360° |
| Kelvin Temperature | 2200, 2700, 3000, 5000 |
| Replaces | 25W & 40W Halogen |
| CRI | 83 |
| IP | 60 |
| Lamp Life (hours) | 50,000 |
| Warranty (years) | 5 |