



PROJECT NAME: _____
 NOTES: _____

CAT. #: _____
 FIXTURE SCHEDULE: _____

LED PAR Lamps – PAR20, PAR30, PAR38 Enhanced Series



PAR20



PAR30S



PAR30L



PAR38

Product Description

MaxLite's energy-efficient PAR lamps significantly reduce your carbon footprint while maintaining a very high quality of light. MaxLite's lineup has industry leading light output, making it ideal for architectural and wall wash lighting in track, recessed and decorative lighting fixtures in retail, high-end residential and office environments. The LED Lamps produce a strong center beam candle power that provides bright and crisp lighting to showcase artwork and products.

Features

- 40,000 hour life (L70 standards)
- Dimmable - TRIAC 10-100%
- Power Factor: ≥0.9
- Standard E26 base
- RoHS Compliant

Ordering Structure

FAMILY	WATTAGE	FAMILY	WET RATED	DIMMABILITY	CRI & CCT	BEAM	JA8/T20 LISTING
E= Enhanced	6 = 6W	PAR20 = PAR20	BLANK = Wet Rated	D = Dimmable	927 = 90 CRI, 2700K	FL = Flood (40°) NF = Narrow Flood (25°)	/JA8 = JA8
	11 = 11W	PAR30S = PAR 30 Short Neck PAR30L = PAR30 Long Neck			930 = 90 CRI, 3000K 940 = 90 CRI, 4000K		
	14 = 14W	PAR38 = PAR38			950* = 90 CRI, 5000K	/T20* = T20	

* Lamp with 90 CRI, 5000K are eligible for only Title 20 T20 Listing.

FCC Statement

NOTE: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

LED PAR Lamps - PAR20, PAR30, PAR38

Enhanced Series

Specifications

Specifications	E6PAR20D9xxx/xxx	E11PAR30SD9xxx/xxx	E11PAR30LD9xxx/xxx	E14PAR38D9xxx/xxx
Base Type	E26			
Input Wattage (W)	6W	11W	11W	13W
Lumens Delivered (lm)	550 lm	1,000 lm	1,000 lm	1,250 lm
Nominal Efficacy (lm/W)	92 lm/W	91 lm/W	91 lm/W	89 lm/W
Equivalent Wattage (W)	50W Inc.	75W Inc.	75W Inc.	120W Inc.
CCT	2700K, 3000K, 4000K, 5000K			
CRI	≥90			
Calculated L70 Lumen Maintenance	40,000 hours			
Distribution	Flood: 40 degrees, Narrow Flood: 25 degrees			
Dimming Technology	Triac			
Dimming Range	Dimmable, 10%-100%			
Input Voltage	120V			
Power Factor	≥0.9			
Lens	Polycarbonate			
Operating Temperature	-4°F to 113°F			
Certifications	ETLus Listed, FCC, RoHS, T20, JA8 (except 5000K CCT)			
Environment	Wet locations, Open and recessed fixtures			
Warranty	3 Year warranty. Check maxlite.com/warranties for details			
Case Qty	24 pcs			

Stocked Items

E6PAR20D9xxx/xxx

ORDER CODE	MODEL NUMBER
111914	E6PAR20D927FL/JA8
111990	E6PAR20D927NF/JA8
111915	E6PAR20D930FL/JA8
111992	E6PAR20D930NF/JA8
111916	E6PAR20D940FL/JA8
112019	E6PAR20D940NF/JA8
111917	E6PAR20D950FL/T20
112020	E6PAR20D950NF/T20

E11PAR30SD9xxx/xxx

ORDER CODE	MODEL NUMBER
112021	E11PAR30SD927FL/JA8
112029	E11PAR30SD927NF/JA8
112022	E11PAR30SD930FL/JA8
112030	E11PAR30SD930NF/JA8
112023	E11PAR30SD940FL/JA8
112031	E11PAR30SD940NF/JA8
112024	E11PAR30SD950FL/T20
112032	E11PAR30SD950NF/T20

E11PAR30LD9xxx/xxx

ORDER CODE	MODEL NUMBER
112033	E11PAR30LD927FL/JA8
112041	E11PAR30LD927NF/JA8
112034	E11PAR30LD930FL/JA8
112042	E11PAR30LD930NF/JA8
112035	E11PAR30LD940FL/JA8
112046	E11PAR30LD940NF/JA8
112036	E11PAR30LD950FL/T20
112047	E11PAR30LD950NF/T20

E14PAR38D9xxx/xxx


ORDER CODE	MODEL NUMBER
112048	E14PAR38D927FL/JA8
112065	E14PAR38D927NF/JA8
112052	E14PAR38D930FL/JA8
112066	E14PAR38D930NF/JA8
112053	E14PAR38D940FL/JA8
112070	E14PAR38D940NF/JA8
112054	E14PAR38D950FL/T20
112071	E14PAR38D950NF/T20

Compatible Dimmers

BRAND	DIMMER MODELS
Lutron	DVCL-153PR-WH
Leviton	R11-DSL06-1TW
Legrand	RHCL453PNICCV4
Leviton	R68-06674-POT
TP-link	HS220



LED PAR Lamps - PAR20, PAR30, PAR38 Enhanced Series

Dimensions

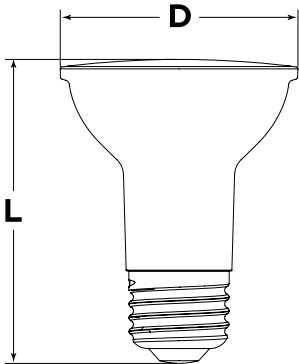

MODEL	L (INCHES)	W (INCHES)
E6PAR20D9xxx/xxx	3.19	2.48


E6PAR20D9xxx/xxx

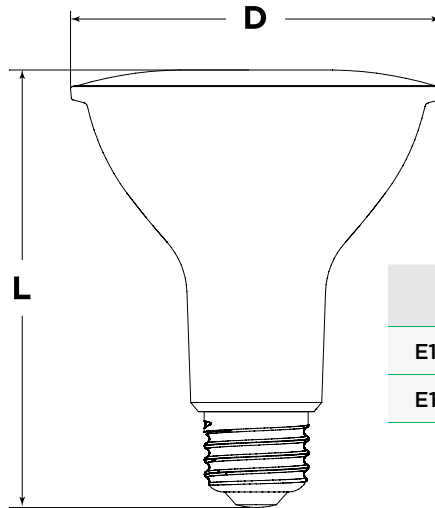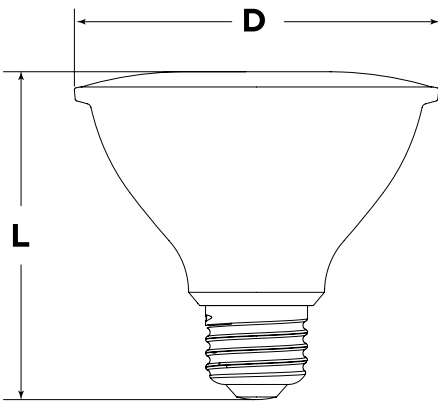

MODEL	L (INCHES)	W (INCHES)
E11PAR30SD9xxx/xxx	3.35	3.74
E11PAR30LD9xxx/xxx	4.47	3.74

E11PAR30SD9xxx/xxx

E11PAR30LD9xxx/xxx

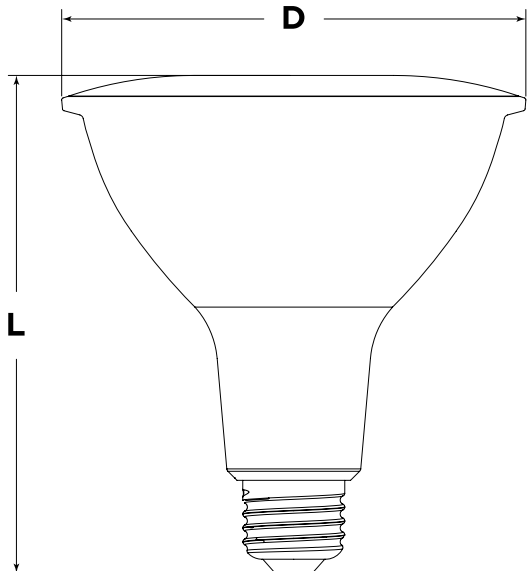

MODEL	L (INCHES)	W (INCHES)
E14PAR38D9xxx/xxx	5.12	4.76

E14PAR38D9xxx/xxx