

LEDCXTEU2RW

RED COMBO EMERGENCY EXIT

Date:..... Location:

Product:.....Project:.....

Quantity:..... Catalog#





Electric Characteristic

Model NO	Input Wattage	Input Current	Efficiency	Recharge Time	Output Wattage	Plug in LED	Lead-Acid Battery	Emergency duration	Product Size
LS-ES007SR	5W	0.04A	0.86P	24H	1W-2W	ΦRed*12pcs	3.6V/800mAh	>90mins	430*187*45/mm

DIMENSION

WARNING:
Unused wires must be capped using enclosed wire nuts.

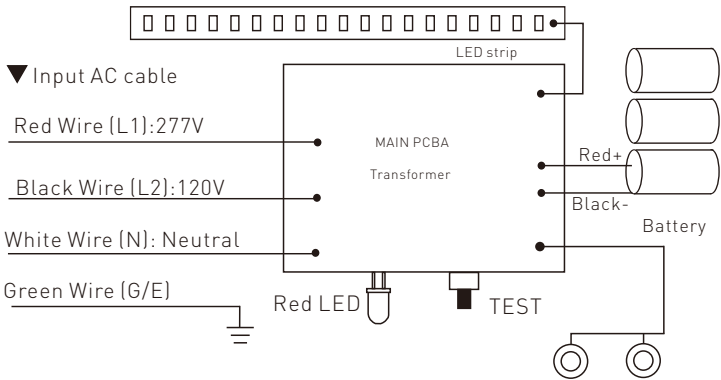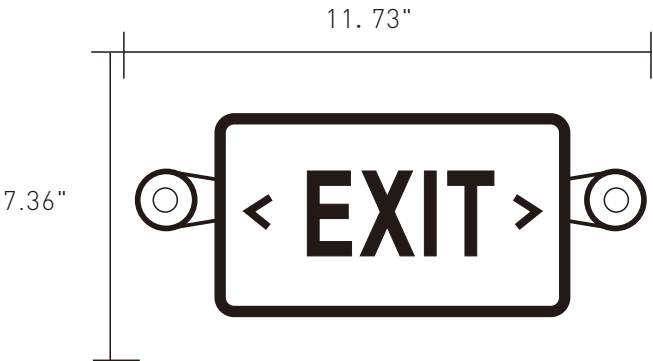

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

WARNING: FAILURE TO FOLLOW THESE INSTRUCTIONS AND WARNINGS MAY RESULT IN DEATH, SERIOUS INJURY OR SIGNIFICANT PROPERTY DAMAGE.
For your protection, read and follow these warnings and instructions carefully before installing or maintaining this equipment.

WARNING:

- RISK OF ELECTRIC SHOCK -NEVER CONNECT TO OR DISCONNECT FROM,OR SERVICE WHILE EQUIPMENT IS ENERGIZED.
- RISK OF FIRE.Lamps are hot.Keep combustible material away from hot parts. Observe lamp manufacturer's warnings, recommendations and restrictions on lamp operation and maintenance.Make sure lamps are correctly installed.
- DO NOT USE ABRASIVE MATERIALS,OR OTHER SOLVENTS.USE OF THESE SUBSTANCES MAY DAMAGE FIXTURE,WHICH MAY RESULT IN PERSONAL INJURY.
- RISK OF PERSONAL INJURY.This product may have sharp edges. Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing and maintaining this product.
-