



100W LED Retrofit Lamp

Order Code: LP28192



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs
- **Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 5.79" diameter by 16" long.*

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended
- Operating temp. range between -22°F and 113°F (-30°C and 45°C)
- Suitable for use in dry and damp environments
- Suitable for use in portable, surface mounted and ceiling luminaires
- Suitable for use in totally enclosed, recessed luminaires.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

OR100-50BE39

Product Performance

Input Power (W)	100
Bare Lamp Lumens	13500
DLC Rated Lumens	11460
Lumens/Watt (Bare Lamp)	114
Beam Angle (°)	360
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80
Life Hours	50000
Minimum Lamp Compartment Size	5.8" Dia by 16" long
Dimming	No
Operating Temperature Range	-22°F to 113°F (-30°C to 45°C)

Physical Characteristics

Base Type	Mogul (E39)
Overall Length A	11.42" (290mm)
Diameter B	4.91" (125mm)
Weight	2.6 lbs (1180 g)

Electrical Characteristics

Input Voltage Range	120V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications



- cULus Listed
- cULus Classified – Certified to UL 1598C
- DLC Qualified - Model# OR100-50BE39

Accessories

- SP12714 – 120-277V Surge Protector



Venture 100W LED Retrofit Lamp

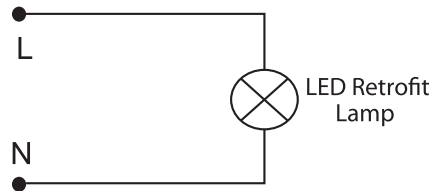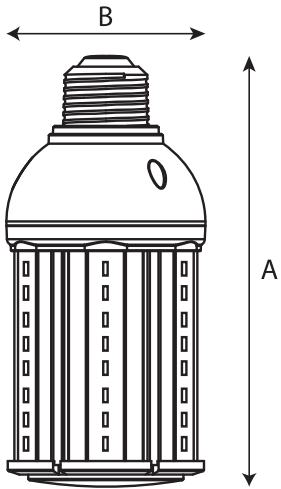

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

