



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs
- *Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 8" diameter by 11" long.*

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended
- Operating temperature range between -40°F and 122°F (-40°C and 50°C)
- Suitable for use in dry and damp environments
- Suitable for use in portable luminaires, surface mounted and ceiling luminaires
- Suitable for use in open and enclosed luminaires with minimum lamp compartment dimensions of 8 inch diameter x 11 inch deep.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.



 polycarbonate cover lenses



VL1-OR054-40E39-AE00

Product Performance

Input Power (W)	54
Bare Lamp Lumens	6500
Lumens/Watt (Bare Lamp)	120
DLC Rated Lumens	5000
Beam Angle (°)	360
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Life Hours	50000
Dimming	No
Minimum Lamp Compartment Size	8" Dia by 11" long
Operating Temperature Range	-40°F to 122°F (-40°C to 50°C)

Physical Characteristics

Base Type	Mogul (E39)
Overall Length A	10.13" (257mm)
Diameter B	3.66" (93mm)
Weight	2.1 lbs (955 g)

Electrical Characteristics

Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications



cULus Listed

DLC Qualified - Model# VL1-OR054-40E39-AE00

Accessories

SP12714 – 120-277V Surge Protector

Venture 54W LED Retrofit Lamp

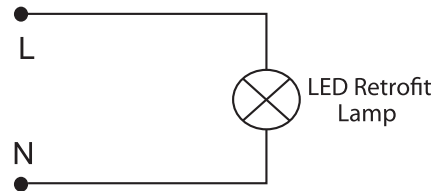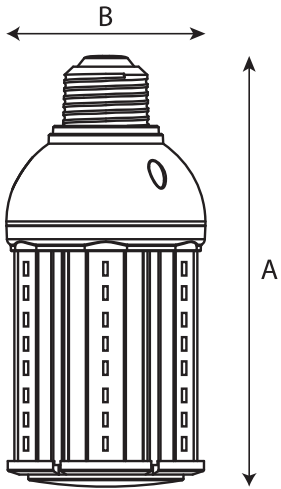

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

