


## SPECIFICATION SHEET : NPY-120-218-CFL


This Is An Original Product From Fulham Co., Inc

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,**  
**\* Meets Energy Star 4.0 Criteria For Applications Listed.**


**This Ballast Will Operate Following Lamps.**



TWIN(CFT/E), 4 PIN  
13W



QUAD (CFQ/E), 4 PIN  
18W




TRIPLE(CFTR/E), 4 PIN  
18W

### ELECTRICAL DATA


INPUT VOLT: 120V $\pm$ 10%, 50/60Hz									
LAMP WATTS/TYPE	*13CFT/E	*18CFQ/E	*18CFTR/E	-	-	-	-	-	-
LAMPS OPERATED	2	2	2						
INPUT WATTS	26.52	38.84	36.41						
LINE CURRENT:	0.396	0.530	0.490						
POWER FACTOR	0.557	0.609	0.618						
BALLAST FACTOR	0.962	1.013	0.966						
EFFICACY FACTOR	3.627	2.607	2.650						
THD	143.80	121.80	119.60						
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 $^{\circ}$ C ( 32 $^{\circ}$ F )								
MAX. CASE TEMP	75 $^{\circ}$ C ( 167 $^{\circ}$ F )								
ENERGY STAR 4.0	YES								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

### MECHANICAL DATA

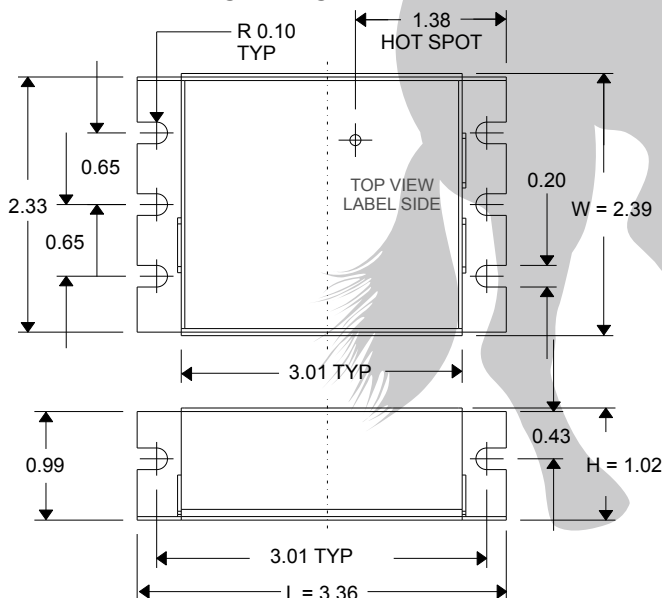

Where : L = Length, W = Width, H = Height

### WIRING DIAGRAMS

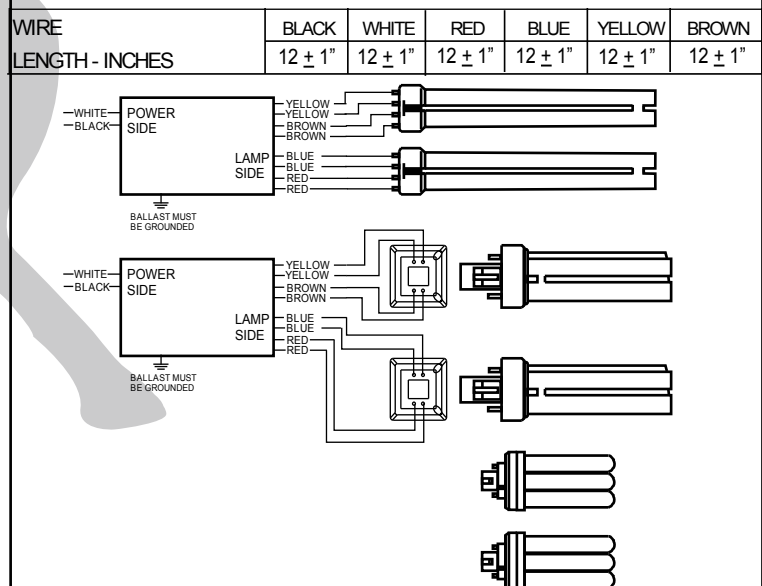

NOTE : This Ballast Case Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 2 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com

2006-9 rev C