




INNOVATIVE ALUMINUM HEAT SINK WITH MULTIPLE SIZE OPTIONS TO FILL THE ENTIRE FIXTURE. Sox retrofits come in four lengths to adequately fill the long, narrow fixtures. Designed in the USA with a specified internal LED driver.

- 20W, 30W, 60W, and 100W models designed to replace 35W to 180W LPS SOX lamps
- Advanced active cooling provides excellent thermal management resulting in high light output & long life
- Directional light output delivers superior "dark sky" performance
- Support harness included
- 590nm, single color, narrow band LEDs are available to eliminate blue light emissions (see -AMB version on pg. 2)

THREE SPECTRAL OUTPUT CHOICES
 2200K (FULL SPECTRUM)
 4000K (FULL SPECTRUM)
 AMBER (590NM, NARROW BAND)

Amber (-AMB) Spectral Output

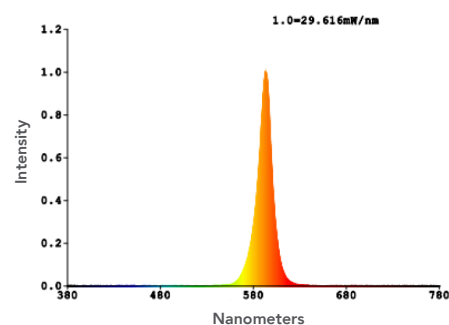

BALLAST BYPASS



BASE TYPE



CRI



ACTIVE COOLING



SURGE PROTECTION




-40°F TO 122°F
OPERATING TEMP



50,000hrs
RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	BASE
LED-8100-22K	844006083779	Up to 35W	20W	2030	2200K	B22D
LED-8101-22K	844006083793	Up to 55W	35W	3232	2200K	B22D
LED-8102-22K	844006083816	Up to 90W	60W	5769	2200K	B22D
LED-8104-22K	844006083830	Up to 180W	100W	11576	2200K	B22D



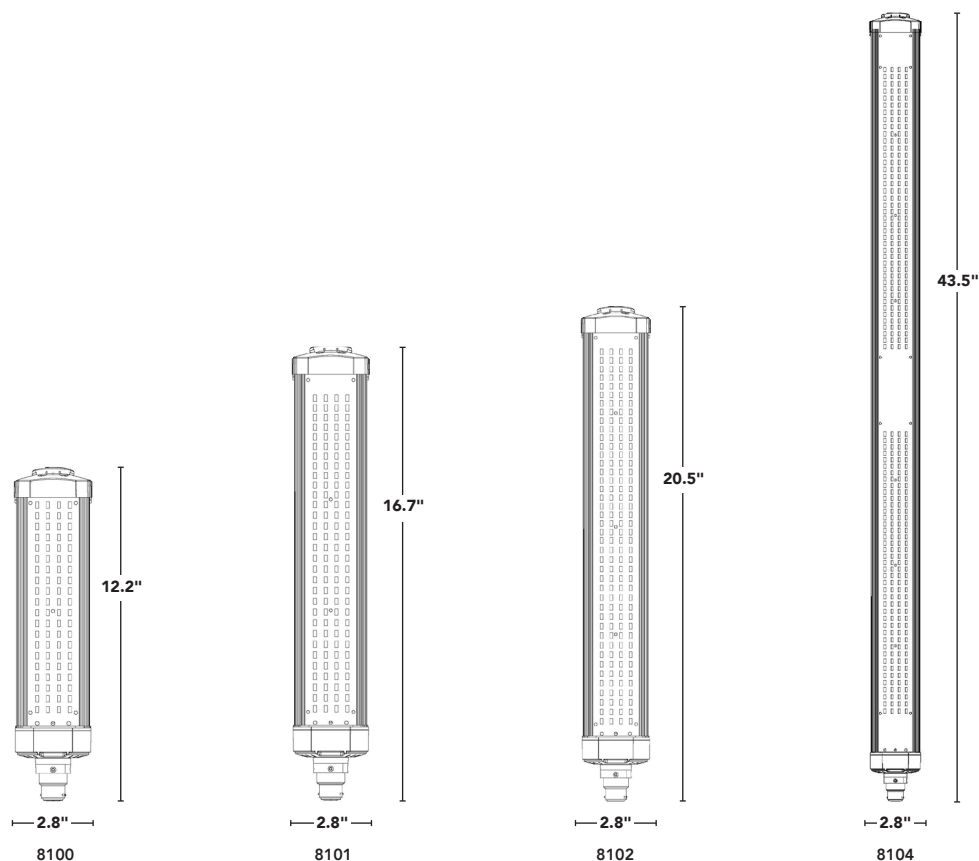

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	BASE
LED-8100-AMB*	844006038359	Up to 35W	20W	822	AMBER	B22D
LED-8100-22K	844006083779	Up to 35W	20W	2030	2200K	B22D
LED-8100-40K	844006083786	Up to 35W	20W	3022	4000K	B22D
LED-8101-AMB*	844006038366	Up to 55W	35W	1258	AMBER	B22D
LED-8101-22K	844006083793	Up to 55W	35W	3232	2200K	B22D
LED-8101-40K	844006083809	Up to 55W	35W	5156	4000K	B22D
LED-8102-AMB*	844006038373	Up to 90W	60W	1657	AMBER	B22D
LED-8102-22K	844006083816	Up to 90W	60W	5769	2200K	B22D
LED-8102-40K	844006083823	Up to 90W	60W	8198	4000K	B22D
LED-8104-AMB*	844006038380	Up to 180W	100W	2873	AMBER	B22D
LED-8104-22K	844006083830	Up to 180W	100W	11576	2200K	B22D
LED-8104-40K	844006083847	Up to 180W	100W	15472	4000K	B22D

*SPECIAL ORDER ONLY