

Low Pressure Sodium - SOX

SOX 55W 1SL

High energy efficiency low pressure sodium lamps for indoor and outdoor applications.

Product data

• General Characteristics

Base	DC Bayonet
Bulb	T15 [Diameter: 1.97 inch]
Operating Position	Base Up +/- 110 D [Hanging +/-110D or Base Up (BU)]
Life to 5% failures	6000 hr
Life to 20% failures	12000 hr
RatedAvgLife(See Family Notes)	18000 hr

• Light Technical Characteristics

Color Temperature	1800 K
Initial Lumens	7800 Lm
Luminous Efficacy	140 Lm/W
Lamp EM	
Lumen Maintenance 2000h	102 %
Lumen Maintenance 5000h	100 %
Luminance Average EM	9 cd/cm ²

• Electrical Characteristics

Watts	55 W
Lamp Wattage	56.0 W
Lamp Voltage	109 V
Lamp Current	0.51 A
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A++
-------------------------------	-----

Mercury (Hg) Content	0 mg
Energy consumption kWh/1000h	61 kWh

• Luminaire Design Requirements

Cap-Base Temperature	150 (max) C
Bulb Temperature	150 (max) C

• Product Dimensions

Overall Length C	425 (max) mm
Diameter D	52 (max) mm


• Product Data

Product number	321513
Full product name	SOX 55W BY22d 1SL
Short product name	SOX 55W BY22d 1SL
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	8711500179753
Bar code on case	8711500600141
Logistics code(s)	928146000028
tpd_ilcos_cd	LS-55-BY22d
eop_net_weight_pp	0.300 kg


PHILIPS

Low Pressure Sodium - SOX

Dimensional drawing

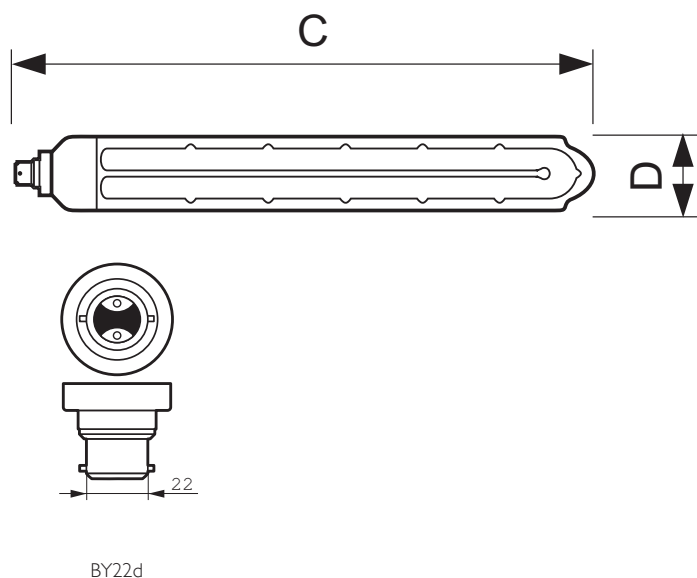

Photometric data

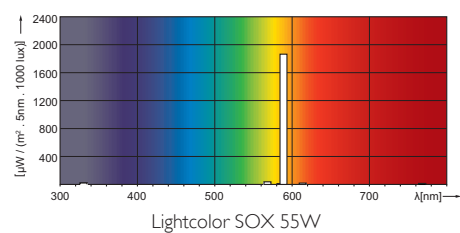

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change