



# MASTER TL-D Super 80

## MASTER TL-D Super 80 36W/865 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

### Product data

General Information		LLMF 2000 h Rated	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	LLMF 4000 h Rated	96 %
Life To 10% Failures (Nom)	12000 h	LLMF 6000 h Rated	95 %
Life To 50% Failures (Nom)	15000 h	LLMF 8000 h Rated	94 %
Life To 50% Failures Preheat (Nom)	20000 h	LLMF 12000 h Rated	93 %
LSF 2000 h Rated	99 %	LLMF 16000 h Rated	92 %
LSF 4000 h Rated	99 %	LLMF 20000 h Rated	91 %
LSF 6000 h Rated	99 %		90 %
LSF 8000 h Rated	99 %	Operating and Electrical	
LSF 12000 h Rated	89 %	Power (Rated) (Nom)	36.0 W
LSF 16000 h Rated	33 %	Lamp Current (Nom)	0.440 A
LSF 20000 h Rated	2 %	Temperature	
Light Technical		Design Temperature (Nom)	25 °C
Color Code	865 [ CCT of 6500K]	Controls and Dimming	
Luminous Flux (Nom)	3250 lm	Dimmable	Yes
Luminous Flux (Rated) (Nom)	3250 lm	Mechanical and Housing	
Color Designation	Cool Daylight	Cap-Base Information	Green Plate
Chromaticity Coordinate X (Nom)	313	Approval and Application	
Chromaticity Coordinate Y (Nom)	337	Energy Efficiency Label (EEL)	A
Correlated Color Temperature (Nom)	6500 K		
Luminous Efficacy (rated) (Nom)	84 lm/W		
Color Rendering Index (Nom)	85		

# MASTER TL-D Super 80


Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	42 kWh
<b>Product Data</b>	
Full product code	871150063207440
Order product name	MASTER TL-D Super 80 36W/865 1SL/25
EAN/UPC - Product	8711500632074
Order code	927921086544

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927921086544
Net Weight (Piece)	135.000 g
ILCOS Code	FD-36/65/1B-E-G13

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

## TL-D 36W/865

## Photometric data

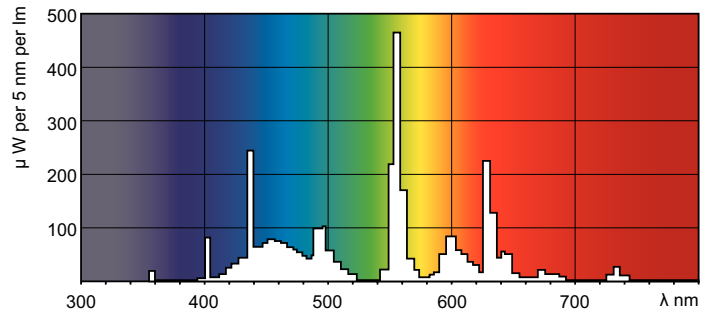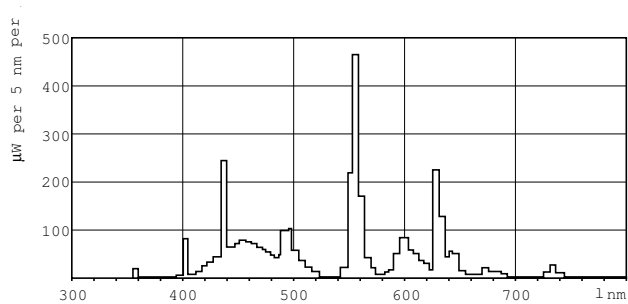

## Lightcolor /865

## Lightcolor /865

## MASTER TL-D Super 80

