


PROGRAMMABLE,
DIGITAL, WIDE-RANGE
ADJUSTABLE CURRENT & DIMMING
TYPE TL RATED

Input Voltage: 120-277V
Input Frequency: 50/60Hz
Side and Bottom Mount/Leads Options

ELECTRICAL SPECIFICATIONS:

Output Power	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min, Starting Temp	Efficiency Up To	Dimming Protocol	Dimming Range
8 to 25W	31W	0.27A @ 120V, 0.11A @ 277V	>0.95	<20%	15 to 55V	350 to 1250mA	90°C	-40°C	82%	0 to 10V	10 to 100%


WIRING: INPUT

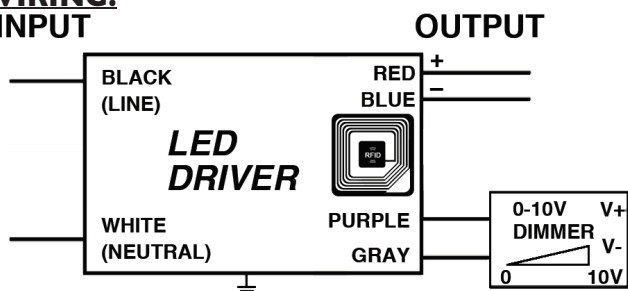

Lead Lengths

Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

PHYSICAL:



Bottom Mount
Model No:
AC25CDI.25APBME



ONLY AC-25CDI.25APMV - Sensor Area
on the bottom with NFC sensor label

Dimensions	Length	Width	Height	Mounting
AC-25CDI.25APME	5.23"	2.48"	1.18"	4.84"
AC-25CDI.25APMV	6.22"	1.73"	1.22"	5.86"
AC25CDI.25APBME	4.56"	2.48"	1.18"	

SAFETY:

- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of $\leq 75^{\circ}\text{C}$
- LED driver has a life expectancy of 100,000 hours at Tcase of $\leq 65^{\circ}\text{C}$
- Warranty: 5 yrs based on max case temp of $< 75^{\circ}\text{C}$; 3 yrs based on max case temp of 90°C^*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)



The LED Driver Type TL Program is intended to assist you in gaining greater market access for your LED drivers. This service is also intended to assist end-product LED Luminaire manufacturers improve their speed-to-market by making it easy to source a compliant LED Driver.

INSTALLATION:

- IP 66 Harsh Weatherproof
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded
- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/I05C tinned stranded copper lead-wires are required for installation

*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to $< 75^{\circ}\text{C}$; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.



Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

