


50mm (2") LED Track Light



The Soraa Arc™ Track light combines elegant design with Soraa's unique quality of light to create a dynamic and versatile solution for retail, hospitality, and residential applications. Soraa Arc gets its name from its unique die-cast curved heat sink, which features a form carefully engineered for optimal thermal performance. Soraa Arc is compatible with Soraa SNAP™, which allows you to shape beams, shift color, and more - in a snap.

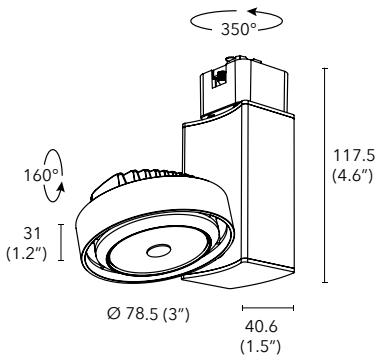

Soraa VIVID™ LED

Soraa Full Spectrum integral LED Light Engine available in 2700K, 3000K, and 4000K with 95 CRI and 95 R9. IR and UV free.

Soraa Optics

Soraa optic technology with exceptional beam control and smooth uniform light distribution. The 10° and 15° beam versions are compatible with Soraa SNAP accessories.

Construction and Finish

Light engine is made of die cast aluminium, transformer case from extruded aluminum. Durable satin finish. Custom colors available. Tilt: 160°, rotation: 350°.

Electrical

120V Fully integral LED electronic constant current driver. 277V available upon request. Frequency: 50/60Hz Power Factor: 0.93 Wattage: 11,18

Dimming and Flicker

Dimmable to <1% Percent Flicker: < 30% Triac and ELV dimming standard Visit www.soraa.com for details

Operating Temperature

Minimum -40° C, 25° C typical.

Applications

Suitable for damp or dry locations. For interior use only.

Accessories


Luminaire accommodates both Arc accessories and Soraa SNAP simultaneously.

Compliance

cULus Listed. FCC CFR Title 47 Part 15 Class B compliant. NOM compliant.

Warranty

Five year warranty. See www.soraa.com.




Build Your Luminaire Sample Number: ART50-25D-927-U-L-W

Series	Beam & Wattage	CCT	Driver	Track Compatibility	Finish
ART50 Soraa Arc Track, 50mm	10D 10° Narrow Spot - 11W	927 2700K	U 120V Triac & ELV	H H style - 120V	B Black
	15D 15° Narrow Spot - 18W	930 3000K		J J style - 120V	W White
	25D 25° Narrow Flood - 18W	940 4000K		L L style - 120V	S Silver
	36D 36° Flood - 18W			(other adapters available)	C Custom

Photometrics - Soraa Arc™ 50mm (2")

Data is shown for 3000K, for 2700K multiply FC by 0.95, for 4000K by 1.04.

Narrow Spot 10°



W	CCT	Lm	CBCP
11	2700	505	7360 cd
11	3000	535	7800 cd
11	4000	555	8090 cd


Candelas at Nadir

0°	8139
5°	5415
15°	248
25°	91
35°	54
45°	25



Soraa SNAP
Compatible

Spot 15°



W	CCT	Lm	CBCP
18	2700	880	7650 cd
18	3000	930	8080 cd
18	4000	965	8380 cd


Candelas at Nadir

0°	8165
5°	6573
15°	628
25°	151
35°	87
45°	46



Soraa SNAP
Compatible

Narrow Flood 25°




W	CCT	Lm	CBCP
18	2700	950	5510 cd
18	3000	1000	5800 cd
18	4000	1040	6030 cd

Candelas at Nadir

0°	5870
5°	4970
15°	1562
25°	128
35°	37
45°	25

Flood 36°



W	CCT	Lm	CBCP
18	2700	950	2560 cd
18	3000	1000	2700 cd
18	4000	1040	2800 cd

Candelas at Nadir

0°	2771
5°	2683
15°	1627
25°	408
35°	82
45°	32

Aiming Angles


L and W refer to outer points where footcandles drop to 50% of maximum. FC refers to initial footcandles at the center of the beam.

Key


L Beam Distance
D Distance
W Beam Width

FC Footcandles
C Distance to Center Beam


0° Horizontal




30° Horizontal



30° Vertical



60° Vertical



**Narrow Spot 10°
(11W)**

D	FC	L	W
6	223	1.3	1.2
8	127	1.7	1.7
10	82	2.1	2.1
12	58	2.5	2.5

D	C	FC	L	W
6	3.7	148	1.6	1.4
8	4.8	85	2.2	1.9
10	5.9	54	2.7	2.3
12	6.9	39	3.2	2.8

D	C	FC	L	W
2	3.7	287	1.4	0.7
3	5.4	130	2.1	1.0
4	7.0	75	2.7	1.4
5	8.6	48	3.4	1.7

D	C	FC	L	W
2	1.4	1226	0.6	0.5
3	2.0	580	0.8	0.7
4	2.6	330	1.1	1.0
5	3.2	212	1.4	1.2

Spot 15°

D	FC	L	W
6	226	1.6	1.6
8	127	2.1	2.1
10	82	2.6	2.6
12	57	3.1	3.1

D	C	FC	L	W
6	3.7	151	2.1	1.8
8	4.8	86	2.8	2.3
10	5.9	55	3.4	2.9
12	7.0	39	4.1	3.5

D	C	FC	L	W
2	3.7	307	1.7	0.9
3	5.4	140	2.5	1.3
4	7.1	79	3.3	1.8
5	8.7	51	4.1	2.1

D	C	FC	L	W
2	1.4	1274	0.7	0.6
3	2.1	591	1.0	0.9
4	2.7	335	1.4	1.2
5	3.3	216	1.7	1.5

Narrow Flood 25°

D	FC	L	W
6	164	2.2	2.2
8	93	2.9	2.9
10	61	3.6	3.6
12	43	4.3	4.3

D	C	FC	L	W
6	3.6	109	2.9	2.5
8	4.8	62	3.8	3.3
10	6.0	41	4.6	4.1
12	7.1	28	5.5	4.9

D	C	FC	L	W
2	3.9	239	2.1	1.2
3	5.7	108	3.1	1.8
4	7.5	62	4.1	2.4
5	9.3	40	5.1	2.9

D	C	FC	L	W
2	1.3	943	1.0	0.9
3	1.9	429	1.4	1.3
4	2.5	244	1.9	1.7
5	3.1	156	2.4	2.1

Flood 36°

D	FC	L	W
6	78	3.3	3.2
8	45	4.3	4.2
10	29	5.3	5.3
12	21	6.2	6.2


D	C	FC	L	W
6	3.8	57	3.8	3.5
8	5.0	32	5.0	4.6
10	6.1	21	6.2	5.5
12	7.1	15	7.5	6.6

D	C	FC	L	W
2	4.2	152	2.1	1.5
3	6.0	68	3.2	2.2
4	7.7	39	4.2	3.0
5	9.3	25	5.1	3.6

D	C	FC	L	W
2	1.4	490	1.3	1.2
3	2.0	221	1.9	1.8
4	2.6	126	2.6	2.4
5	3.3	82	3.1	2.9

Soraa Arc™ Color and Whiteness Rendering

CCT	CRI	R9	Rf	Rg	Rfh1	Rw	McA
2700	95	95	90	100	95	120	3
3000	95	95	90	100	95	120	3
4000	95	95	90	100	95	70	4

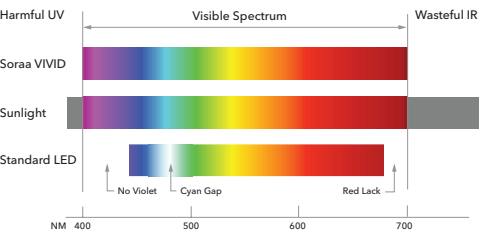

Soraa has engineered the perfect balance between color rendering and white rendering. Soraa's core technology uses a violet LED emitter as the basis for full spectrum light. This allows both Vivid™ color rendering and Natural White™ white rendering, which creates whiteness by exciting fluorescing agents with violet radiation, without the harmful effect of UV.


Rf: The TM-30 metric for color fidelity (similarity to colors under natural light), a more accurate version of the CRI Ra. Rf is 100 for natural light.

Rg: The TM-30 metric for color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.


Rfh1: The TM-30 metric for color fidelity for red tones. Rfh1 is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.

Rw: The Soraa-developed metric for white fidelity. Rw measures the magnitude of excitation of whitening agents within white materials. Rw is 100 for natural light.


2700K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

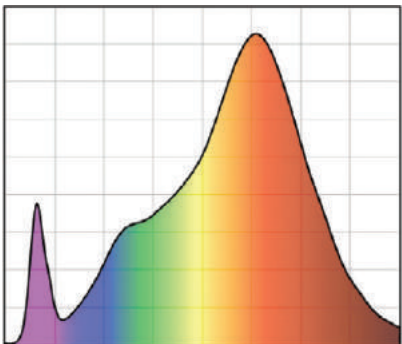


CRI: 95, R9: 95


3000K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

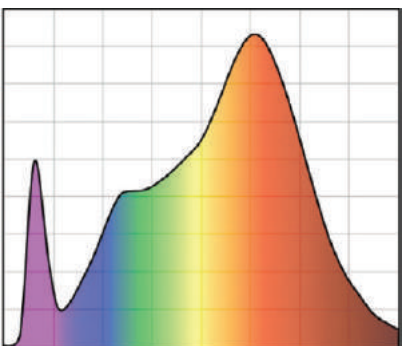


CRI: 95, R9: 95


4000K



Rf: 90, Rg: 100, Rfh1: 95



Rw: 70

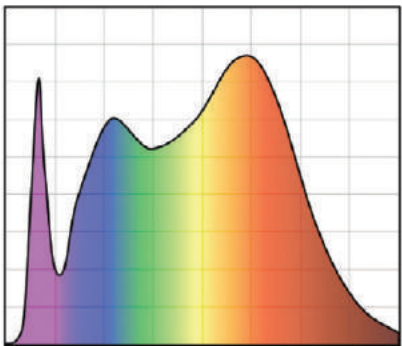


CRI: 95, R9: 95

100mm (4") LED Track Light

SORAA arc™

The Soraa Arc™ Track light combines elegant design with Soraa's unique quality of light to create a dynamic and versatile solution for retail, hospitality, and residential applications. Soraa Arc gets its name from its unique die-cast curved heat sink, which features a form carefully engineered for optimal thermal performance. Soraa Arc is compatible with Soraa SNAP™, which allows you to shape beams, shift color, and more - in a snap.

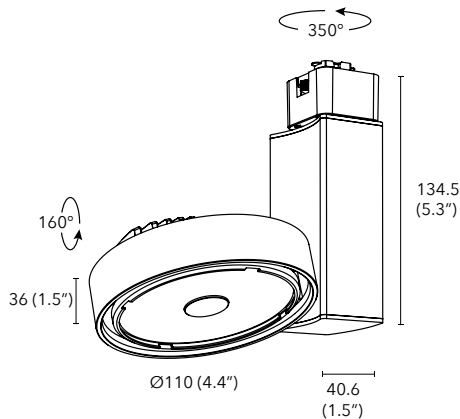

Soraa VIVID™ LED

Soraa Full Spectrum integral LED Light Engine available in 2700K, 3000K, and 4000K with 95 CRI and 95 R9. IR and UV free.

Soraa Optics

Soraa optic technology with exceptional beam control and smooth uniform light distribution. The 9° beam version is compatible with Soraa SNAP accessories.

Construction and Finish

Light engine is made of die cast aluminium, transformer case from extruded aluminium. Durable satin finish. Custom colors available. Tilt: 160°, rotation: 350°.

Electrical

120V Fully integral LED electronic constant current driver. 277V available upon request. Frequency: 50/60Hz Power Factor: 0.93 Wattage: 20

Dimming and Flicker

Dimmable to <1% Percent Flicker: < 30% Triac and ELV dimming standard Visit www.soraa.com for details

Operating Temperature

Minimum -40° C, 25° C typical.

Applications

Suitable for damp or dry locations. For interior use only.

Accessories

Luminaire accommodates both Arc accessories and Soraa SNAP simultaneously.

Compliance

cULus Listed. FCC CFR Title 47 Part 15 Class B compliant. NOM compliant.

Warranty

Five year warranty. See www.soraa.com.



W White



B Black



S Silver




Build Your Luminaire Sample Number: ART100-09D-927-U-H-W

Series	Beam	CCT	Driver	Track Compatibility	Finish
ART100 Soraa Arc Track, 100mm	09D 9° Narrow Spot	927 2700K	U 120V Triac & ELV	H H style - 120V	B Black
	25D 25° Narrow Flood	930 3000K		J J style - 120V	W White
	36D 36° Flood	940 4000K		L L style - 120V (other adapters available)	S Silver
					C Custom

Photometrics - Soraa Arc™ 100mm (2")

Data is shown for 3000K, for 2700K multiply FC by 0.95, for 4000K by 1.04.

Narrow Spot 9°




W	CCT	Lm	CBCP
20	2700	950	17500 cd
20	3000	1000	18500 cd
20	4000	1040	19240 cd

Candelas at Nadir

0°	20732
5°	9736
15°	437
25°	171
35°	106
45°	48

Narrow Flood 25°




W	CCT	Lm	CBCP
20	2700	995	5770 cd
20	3000	1050	6090 cd
20	4000	1090	6320 cd

Candelas at Nadir

0°	5689
5°	4891
15°	1558
25°	165
35°	52
45°	36

Flood 36°




W	CCT	Lm	CBCP
20	2700	995	2680 cd
20	3000	1050	2830 cd
20	4000	1090	2940 cd

Candelas at Nadir

0°	2939
5°	2759
15°	1608
25°	427
35°	93
45°	46

Wide Flood 60°



W	CCT	Lm	CBCP
20	2700	995	1090 cd
20	3000	1050	1150 cd
20	4000	1090	1190 cd

Candelas at Nadir

0°	958
5°	953
15°	905
25°	701
35°	342
45°	108



Soraa SNAP
Compatible


Aiming Angles

L and W refer to outer points where footcandles drop to 50% of maximum. FC refers to initial footcandles at the center of the beam.

Key

L Beam Distance
D Distance
W Beam Width
FC Footcandles
C Distance to Center Beam


0° Horizontal



Narrow Spot 9°


D	FC	L	W
6	556	1.0	1.0
8	322	1.3	1.3
10	207	1.6	1.6
12	145	2.0	2.0

30° Horizontal




D	C	FC	L	W
6	3.7	380	1.3	1.1
8	4.8	213	1.7	1.5
10	5.9	136	2.2	1.9
12	6.9	97	2.5	2.2

30° Vertical



D	C	FC	L	W
2	3.7	650	1.2	0.7
3	5.4	297	1.8	1.0
4	7.0	171	2.4	1.3
5	8.6	111	3.0	1.6

60° Vertical



D	C	FC	L	W
2	1.4	2766	0.5	0.4
3	2.0	1379	0.7	0.6
4	2.7	807	0.9	0.8
5	3.3	530	1.1	1.0

Narrow Flood 25°

6	157	2.2	2.2
8	88	3.0	3.0
10	57	3.7	3.7
12	40	4.4	4.4

6	3.7	105	2.9	2.5
8	4.8	60	3.8	3.4
10	6.0	39	4.6	4.2
12	7.1	27	5.6	4.9

2	3.9	229	2.1	1.3
3	5.7	103	3.2	1.9
4	7.5	58	4.3	2.5
5	9.2	39	5.2	3.1

2	1.3	915	1.0	0.9
3	2.0	416	1.4	1.3
4	2.6	236	1.9	1.7
5	3.2	152	2.4	2.1

Flood 36°

6	82	3.2	3.2
8	46	4.2	4.2
10	30	5.3	5.3
12	21	6.3	6.3

6	3.8	57	3.8	3.5
8	5.0	32	5.0	4.6
10	6.1	21	6.3	5.8
12	7.1	15	7.5	6.9

2	4.2	151	2.2	1.6
3	5.9	68	3.3	2.3
4	7.6	38	4.4	3.1
5	9.1	25	5.5	3.8

2	1.4	503	1.3	1.2
3	2.1	226	1.9	1.8
4	2.7	128	2.6	2.3
5	3.3	83	3.2	2.9

Wide Flood 60°

6	27	5.8	5.8
8	16	7.5	7.5
10	10	9.5	9.5
12	7	10.5	10.5


6	4.3	23	5.0	5.3
8	5.3	13	6.3	7.1
10	6.1	9	7.8	8.8
12	6.7	6	9.6	10.1

2	4.4	96	2.0	1.9
3	5.9	44	2.9	2.9
4	7.2	24	3.9	3.7
5	8.3	16	5.5	3.8

2	1.7	200	1.7	1.9
3	2.4	90	2.5	2.7
4	3.2	51	3.4	3.7
5	3.9	33	4.1	4.5

Soraa Arc™ Color and Whiteness Rendering

CCT	CRI	R9	Rf	Rg	Rfh1	Rw	McA
2700	95	95	90	100	95	120	3
3000	95	95	90	100	95	120	3
4000	95	95	90	100	95	70	4

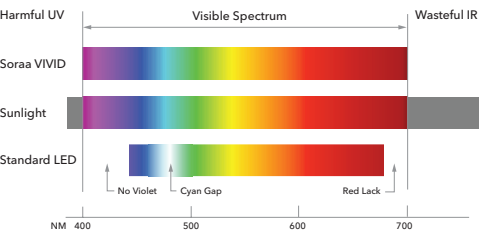

Soraa has engineered the perfect balance between color rendering and white rendering. Soraa's core technology uses a violet LED emitter as the basis for full spectrum light. This allows both Vivid™ color rendering and Natural White™ white rendering, which creates whiteness by exciting fluorescing agents with violet radiation, without the harmful effect of UV.


Rf: The TM-30 metric for color fidelity (similarity to colors under natural light), a more accurate version of the CRI Ra. Rf is 100 for natural light.

Rg: The TM-30 metric for color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.


Rfh1: The TM-30 metric for color fidelity for red tones. Rfh1 is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.

Rw: The Soraa-developed metric for white fidelity. Rw measures the magnitude of excitation of whitening agents within white materials. Rw is 100 for natural light.


2700K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

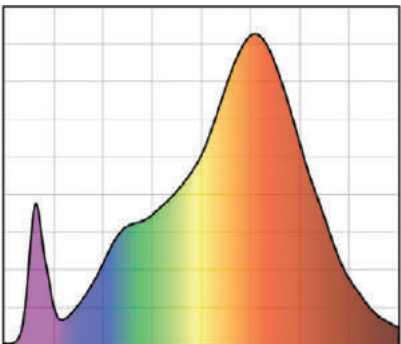


CRI: 95, R9: 95


3000K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

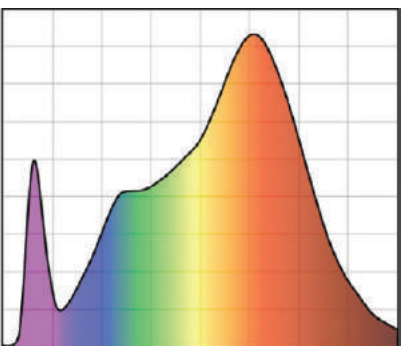


CRI: 95, R9: 95


4000K



Rf: 90, Rg: 100, Rfh1: 95



Rw: 70

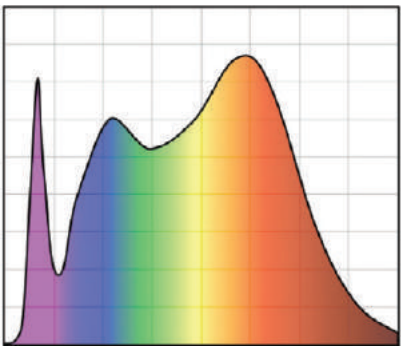

CRI: 95, R9: 95