


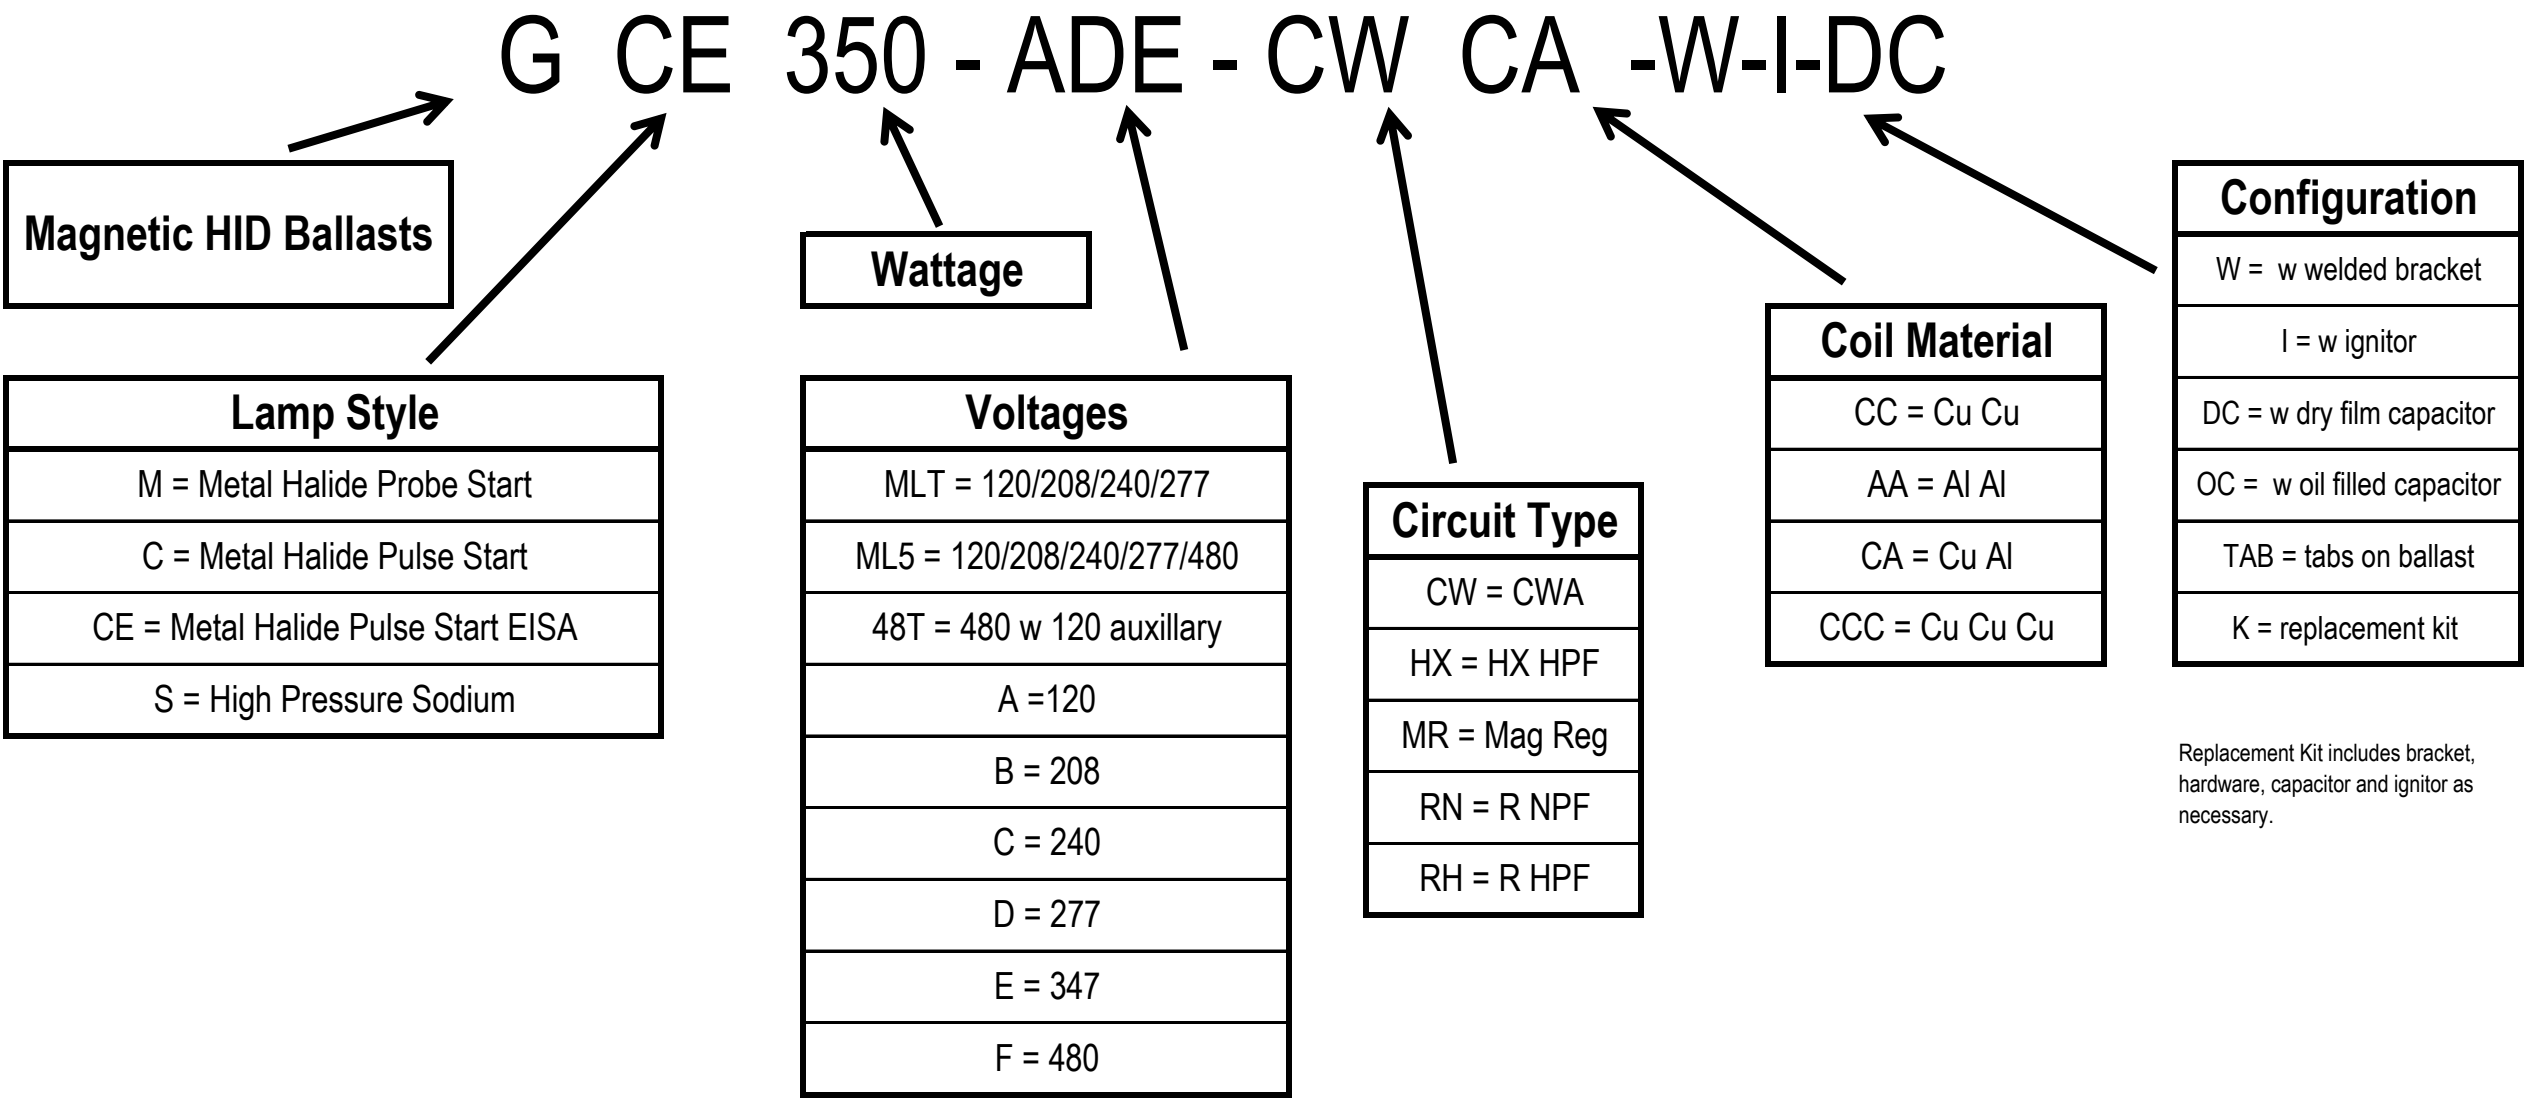

Magnetic HID Ballasts

Lamp Style

M = Metal Halide Probe Start

C = Metal Halide Pulse Start

CE = Metal Halide Pulse Start EISA

S = High Pressure Sodium

Wattage

Voltages

MLT = 120/208/240/277

ML5 = 120/208/240/277/480

48T = 480 w 120 auxillary

A = 120

B = 208

C = 240

D = 277

E = 347

F = 480

Circuit Type

CW = CWA

HX = HX HPF

MR = Mag Reg

RN = R NPF

RH = R HPF

Coil Material

CC = Cu Cu

AA = Al Al

CA = Cu Al

CCC = Cu Cu Cu

Configuration

W = w welded bracket

I = w ignitor

DC = w dry film capacitor

OC = w oil filled capacitor

TAB = tabs on ballast

K = replacement kit

Replacement Kit includes bracket, hardware, capacitor and ignitor as necessary.

UBI#	Hatch Item No.	Lamp Type	Lamp Watts	Lamp ANSI Code	Circuit Type	OCV	Input Volts						TempH Max	TempN Max	Ignitor	Cap Type Std	Capicittance μ F	Cap. Min. VAC	Core Dimensions (cm)	Coil Material			
																				Pri.	Sec.	3rd.	
2320	GS70-MLT-HXCA-K	S	70	S62	HX-HPF		120	208	240	277					GHPSR1	Dry	7	300		Cu	Al		
2330	GS70-48T-HXCC-K	S	70	S62	HX-HPF	<300	120					480	A	A	GHPSR1	Dry	7	300	10 x 7.2 x 4.7	Cu	Cu		
2400	GS70-A-RNC-K	S	70	S62	R-NPF	120	120						A	A	GHPSR1	Dry	28	120	6.7 x 5.7 x 3.2	Cu			
2430	GS100-MLT-HXCA-K	S	100	S54	HX-HPF		120	208	240	277					GHPSR1	Dry	10	280		Cu	Al		
2440	GS100-48T-HXCC-K	S	100	S54	HX-HPF	<300	120					480	C	A	GHPSR1	Dry	10	280	10 x 7.2 x 5.1	Cu	Cu		
2550	GS100-A-RNA-K	S	100	S54	R-NPF	120	120								GHPSR1	Dry	10	280		Al			
2570	GS150-MLT-HXCA-K	S	150	S55	HX-HPF		120	208	240	277					GHPSR1	Dry	14	280		Cu	Al		
2580	GS150-48T-HXCC-K	S	150	S55	HX-HPF	<300	120					480	F	B	GHPSR1	Dry	14	280	10 x 7.2 x 7.6	Cu	Cu		
2690	GS150-A-RNA-K	S	150	S55	R-NPF	120	120								GHPSR1	Dry	14	280		Al			
2870	GS250-ML5-CWCA-K	S	250	S50	CWA		120	208	240	277		480			GHPS24	Oil	35	240		Cu	Al		
2910	GS250-MLT-CWCA-K	S	250	S50	CWA		120	208	240	277					GHPS24	Oil	35	240		Cu	Al		
3170	GS400-ML5-CWCA-K	S	400	S51	CWA		120	208	240	277		480			GHPS24	Oil	55	240		Cu	Al		
3220	GS400-MLT-CWCA-K	S	400	S51	CWA		120	208	240	277					GHPS24	Oil	55	240		Cu	Al		
3500	GS1000-ML5-CWCA-K	S	1000	S52	CWA		120	208	240	277		480	A	A	GHPS1K	Oil	26	525	15.3 x 10.8 x 9.9	Cu	Al		
3530	GS1000-MLT-CWCA-K	S	1000	S52	CWA		120	208	240	277			A	A	GHPS1K	Oil	26	525	15.3 x 10.8 x 9.9	Cu	Al		