

KTEB-226-1-TP-SC

COMPACT FLUORESCENT ELECTRONIC BALLAST



DESCRIPTION

2 x 26W CFL | 120V Input | NPF | Rapid Start

STARTING METHOD: Rapid Start

LAMP CONNECTION: Series

INPUT VOLTAGE: 120Vac $\pm 10\%$

INPUT FREQUENCY: 50/60 Hz

POWER FACTOR: Normal

WARRANTY: 5 Years

PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Meets ANSI/IEEE C62.41 Category A
- UL, cUL 935 Listed
- Lamp End-of-Life Protected
- Type HL

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%
CFQ26W/GX24q	2	120	50	0.72	>0.50	<1.70	0.88	1.76	150
CFTR26W/GX24q	1	120	31	0.46	>0.50	<1.70	1.10	3.55	150
CFQ57W/GX24q	1	120	46	0.67	>0.50	<1.70	0.77	1.67	150
CFTR42W/GX24q	1	120	42	0.61	>0.50	<1.70	0.90	2.14	150
CFTR32W/GX24q	1	120	34.5	0.52	>0.50	<1.70	0.95	2.75	150
CFS21W/GR10q	2	120	42	0.60	>0.50	<1.70	0.85	2.02	150
FC16T9 40W	1	120	39	0.57	>0.50	<1.70	0.90	2.31	150
FC12T5 40W	1	120	37	0.55	>0.50	<1.70	0.85	2.30	150
FT18W/2G11	2	120	39	0.53	>0.50	<1.70	0.95	2.44	150
FT24W/2G11	2	120	46.5	0.64	>0.50	<1.70	0.85	1.83	150

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	4.00"
WIDTH	1.87"
HEIGHT	1.18"
MOUNTING	3.60"
CASE STYLE	L8

STANDARD LEAD LENGTHS*

WHITE	12"
BLACK	12"
BLUE	12"
RED	12"
YELLOW	12"

*Consult Keystone for special lead length requirements.

Lead wires are 18 AWG
105 C°/600V, solid copper.


CASE MATERIAL: Metal

KTEB-226-1-TP-SC


COMPACT FLUORESCENT ELECTRONIC BALLAST

WIRING DIAGRAMS

P2-5

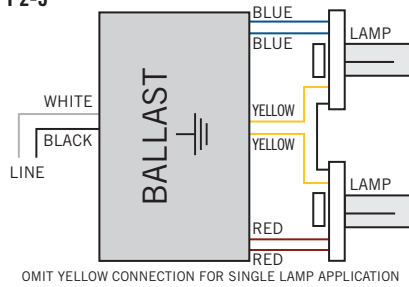

HOT SPOT LOCATION

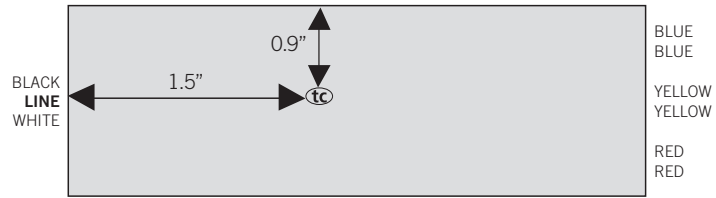

Actual tc point is noted on each ballast label.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-226-1-TP-SC /C-CP	Carton Pack	50	Active

ALTERNATE CASE OPTIONS:

KTEB-226-1-TP-**SCS**: With Bottom Studs

KTEB-226-1-TP-SC-**RJ**: Rear Junction Wire Leads

KTEB-226-1-TP-SC-**RJS**: Rear Junction Wire Leads with Studs

CATALOG NUMBER BREAKDOWN

KTEB-226-1-TP-SC-CP

Keystone Technologies Electronic Ballast	2 Lamp	Wattage	120V Input	Thermal Protection	Slim Case	Packaging Style
---	-----------	---------	---------------	-----------------------	--------------	--------------------