


Low Voltage Switches

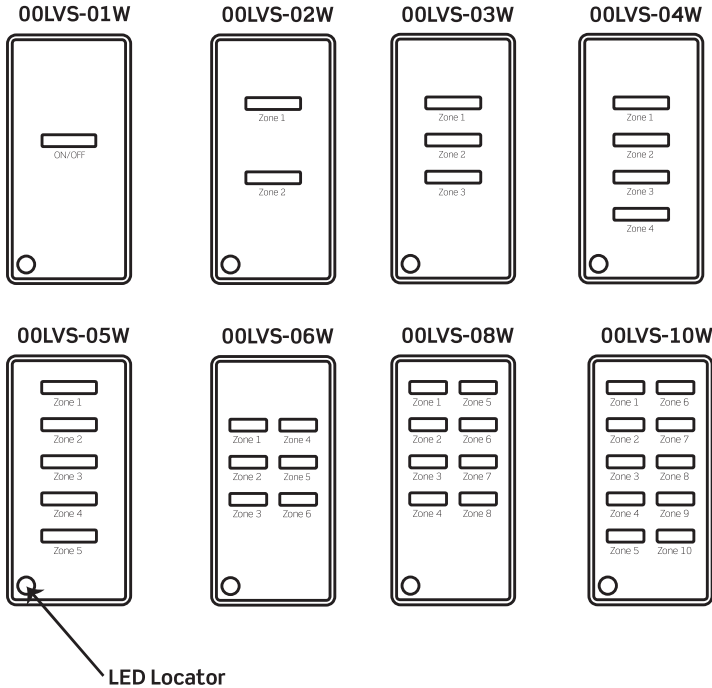

DESCRIPTION

The Leviton line of Low Voltage Switches incorporates reliable technology into the contemporary Decora® style. They can be ordered from one button to 10 buttons per gang and are mounted in a standard deep switch box.

SPECIFICATIONS

GENERAL

- 1-10 buttons
- Status LED for each button provides true relay status
- Matching screwless wallplate
- Switches can be programmed for ON, OFF, ON/OFF, Groups, or Presets/Scenes when used in conjunction with a EZ-MAX Plus Relay Control Panel

LOW VOLTAGE SWITCHES WORK WITH

- EZ-MAX Plus Relay Control Panels
- a-2000® dimming cabinets with analog card*
- MDS cabinets*
- Low voltage equipment by others*

WIRING

- 1 wire for +24VDC
- 2 wires per button (1 wire for switch, 1 wire for LED)
- 1 wire for LED locator

POWER

- Input power: 24 VDC
- Consumption:

Station	Unit Load Consumption @ 24Vdc 1 Unit Load = 25mA
1 Button	0.5
2 Button	0.8
3 Button	1.1
4 Button	1.4
5 Button	1.7
6 Button	2
8 Button	2.5
10 Button	3.0

SETUP AND PROGRAMMING

- Wire terminals and install

PHYSICAL DIMENSIONS

- 4 5/16" h x 1 5/8" w x 1 3/4" d
- Use 2 1/4" Deep switch box

SWITCH PLATE

- Decora

CUSTOM LABELING

- Custom labeling is available from the factory
- Custom labeling kits are available for use in the field

ENVIRONMENTAL

- 32 to 104°F (0 to 40°C) relative humidity less than 90% non-condensing

*Specific features determined by HOST product

CATALOG NUMBER GUIDE




①	②	③
00LVS -		
① Low Voltage Switch		
② Number of Buttons		
01 02 03 04		
05 06 08 10		
③ Color: W = White		

WALLPLATE ORDERING GUIDE

Low Voltage Switches fit a standard Decora opening, and can be used with the following standard Leviton wallplate series:

803xx	Decora Plus screwless wallplates
804xx	Decora plastic and metal wallplates — standard size
804xx-Nxx	Decora nylon wallplate — standard size
PJ26x	Decora nylon wallplates — midway size
806xx	Decora plastic wallplate - midway Size
S026x	Oversized metal wallplate

Browse the Leviton website for more wallplate options

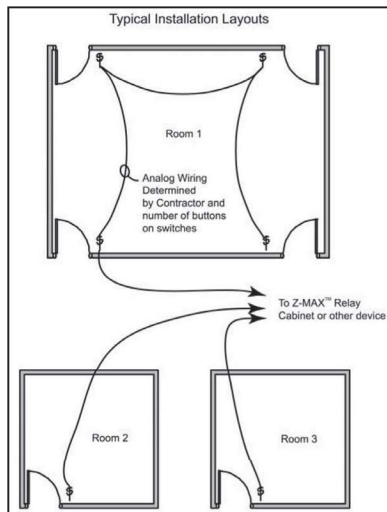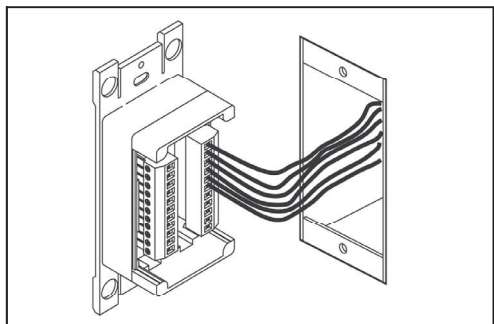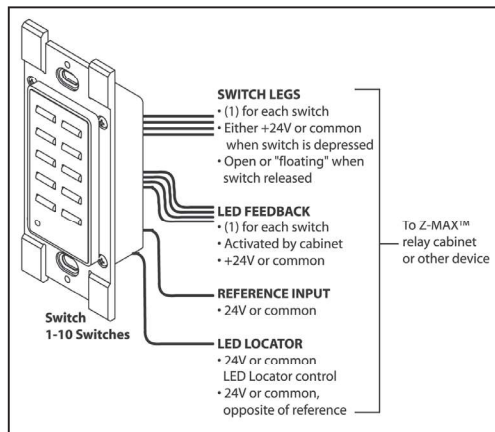

Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation

20497 SW Teton Avenue, Tualatin, OR 97062 **tel** 800-736-6682 **fax** 503-404-5594 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **fax** 800-832-9538 **tech line** (8:30AM-7:00PM ET Mon-Fri) 800-824-3005

Visit our Website at: www.leviton.com/ezmax

©2017 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-70888/D17-aa
REV APR 2017