



Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:



GE
Lighting

22990 - 100PAR/H/PRO-6PK
GE PAR38

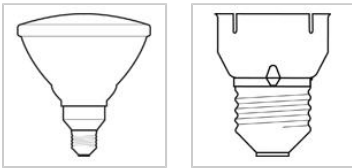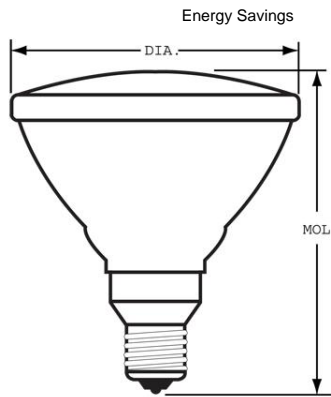

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
 - Keep combustible materials away from lamp.

GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Wattage	100/88
Voltage	130/120
Rated Life	2000 hrs

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1500 /1150
Center Beam Candlepower (CBCP)	5000
Color Temperature	2900 K
Nominal Initial Lumens per Watt	15 /13

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
---------------	----------------------------

DIMENSIONS

Maximum Overall Length (MOL)	5.3130 in(135.0 mm)
Bulb Diameter (DIA)	4.750 in(120.6 mm)
Bulb Diameter (DIA) (MAX)	4.750 in(120.6 mm)

PRODUCT INFORMATION

Product Code	22990
Description	100PAR/H/PRO-6PK
Standard Package	Case
Standard Package GTIN	
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168229906