

MasterClass LEDtube InstantFit T8

13T8/MAS/48-835/IF20/P/DIM 10/1

The MasterClass InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using the existing ballast. MasterClass TLEDs feature a shatter-resistant polycarbonate construction, 70,000 hour life and a standard 7-year limited warranty. When maximum energy savings and long life are needed, Philips MasterClass TLED are the solution.

Product data

General Information	
Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Indoor
Nominal Lifetime (Nom)	70000 h
Switching Cycle	50000X
B50L70	70000 h
Light Technical	
Color Code	835 [CCT of 3500K]
Initial lumen (Nom)	2000 lm
Luminous Flux (Rated) (Nom)	2000 lm
Correlated Color Temperature (Nom)	3500 K
Color Consistency	<6
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	20000-120000 Hz
Power (Rated) (Nom)	13 W
Lamp Current (Max)	400 mA

Lamp Current (Min)	130 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Max)	347 V
Voltage (Min)	120 V
Voltage (Nom)	277 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	Yes

MasterClass LEDtube InstantFit T8

Mechanical and Housing

Product Length 1200 mm

Approval and Application

Energy Saving Product Yes

Approbation Marks RoHS compliance UL certificate DLC compliance

Energy Certifications DLC Standard

DesignLights Consortium Qualified Product List -

Product Data

Order product name 13T8/MAS/48-835/IF20/P/DIM 10/1

EAN/UPC - Product 046677473938

Order code 473934

Numerator - Quantity Per Pack 1


Numerator - Packs per outer box 10

Material Nr. (12NC) 929001397734

Net Weight (Piece) 0.220 kg

Model Number 9290013977A



Dimensional drawing

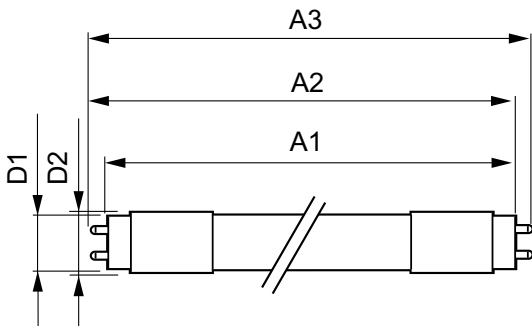

TLED IF MasterClass 4ft 2000lm 3500K

Product	D1	D2	A1	A2	A3
13T8/MAS/48-835/ IF20/P/DIM 10/1	25.7 mm	26.3 mm	1198.1 mm	1205.2 mm	1212.3 mm


Photometric data

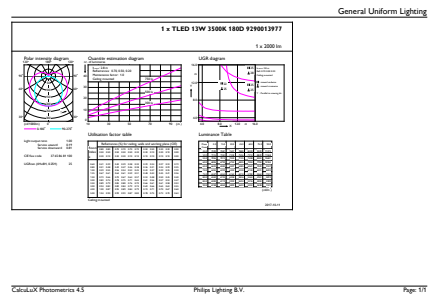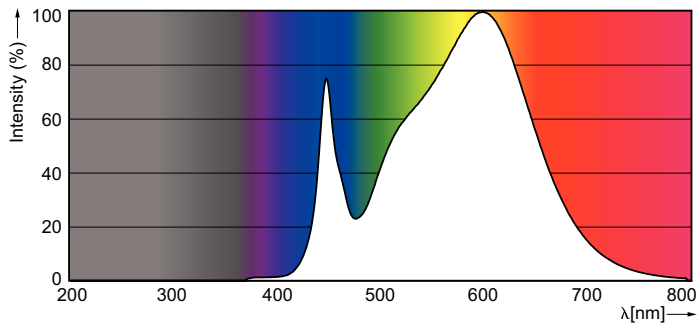

LEDtube 13W G13 835 IF DIM


MasterClass LEDtube InstantFit T8

Photometric data

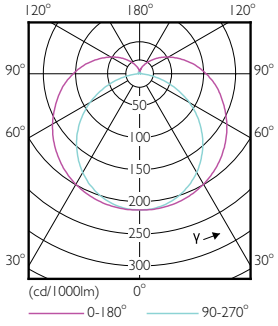


LEDtube 13W G13 830-850 IF DIM


Lifetime

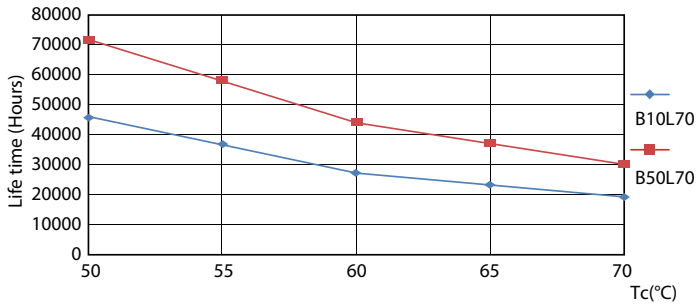


LEDtube 13W G13 830-850 IF DIM

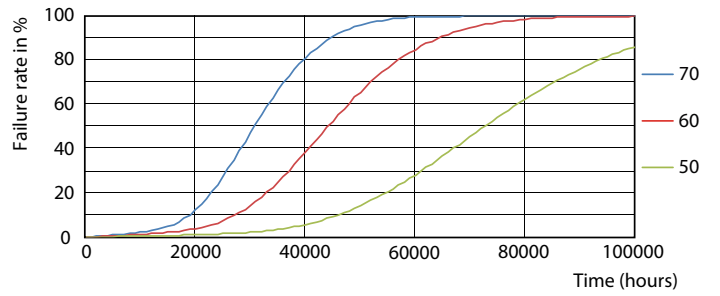

LEDtube 13W G13 830-850 IF DIM

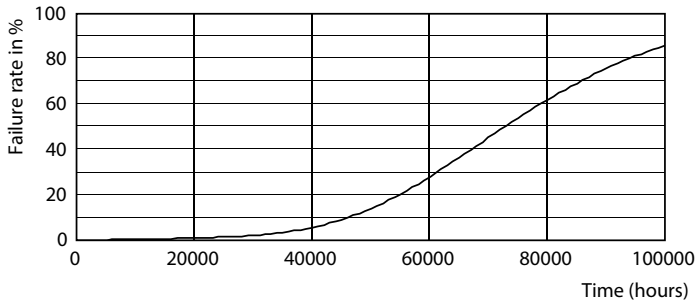


LEDtube 13W G13 830-850 IF DIM

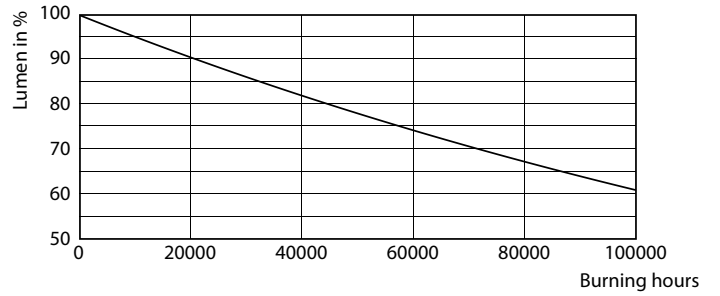

LEDtube 13W G13 830-850 IF DIM

MasterClass LEDtube InstantFit T8

Lifetime

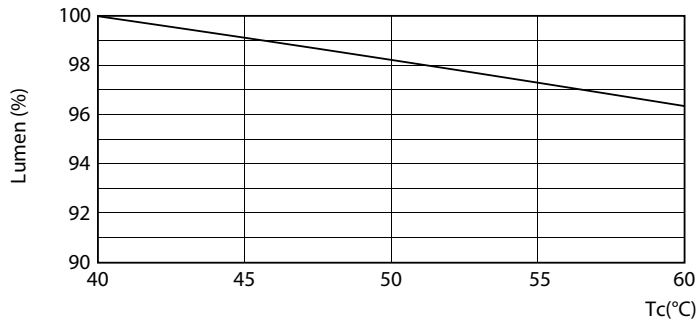

LEDtube 13W G13 830-850 IF DIM

