



CorePro Plastic (Dimmable) A-Shape Lamps

14A19/COR/950/FR/P/E26/DIM/T20 6/1CT

Dimmable A-shape lamps that offer over 25,000 hours lifetime. Title 20 listed lamps that can be sold in California and ideal for commercial spaces nationwide.

Product data

General Information		Lamp Current (Nom)	
Cap-Base	E26		140 mA
Nominal lifetime	25,000 hour(s)	Wattage Equivalent	100 W
Switching Cycle	50,000	Starting Time (Nom)	0.5 s
Lighting Technology	LED	Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.7
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	950 [CCT of 5000K]	T-Case Maximum (Nom)	212 °F
Beam Angle (Nom)	200 degree(s)		
Luminous Flux	1,500 lm	Controls and Dimming	
Color Designation	Daylight	Dimmable	Only with specific dimmers
Correlated Color Temperature (Nom)	5000 K		
Luminous Efficacy (rated) (Nom)	107 lm/W	Mechanical and Housing	
Color Consistency	<4	Bulb Finish	Frosted
Color rendering index (CRI)	90	Bulb Material	Plastic
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Shape	A19
		UL Wet/ damp/ dry location	Damp location
		Net Weight (Piece)	0.106 lb
Operating and Electrical			
Input Frequency	60 Hz		
Power Consumption	14 W		

CorePro Plastic (Dimmable) A-Shape Lamps


Approval and Application	
EU RoHS compliant	Yes
T20 compliant	Yes
Ambient temperature range	-4 to +113 °F

Application Conditions	
can it be used in closed luminaires	No

Product Data	
Order product name	14A19/COR/950/FR/P/E26/DIM/T20 6/1CT



Full product name	14A19/COR/950/FR/P/E26/DIM/T20 6/1CT
Order code	588657
Material Nr. (12NC)	929003784904
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677588656
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677588651

Dimensional drawing

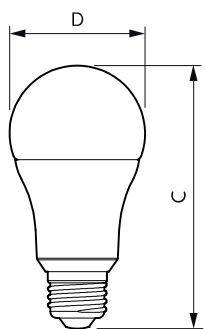

Product	D	C
14A19/COR/950/FR/P/E26/DIM/T20 6/1CT	2-3/8 inch	4-5/8 inch

Photometric data

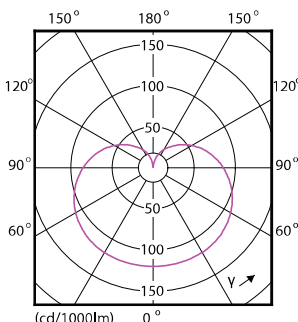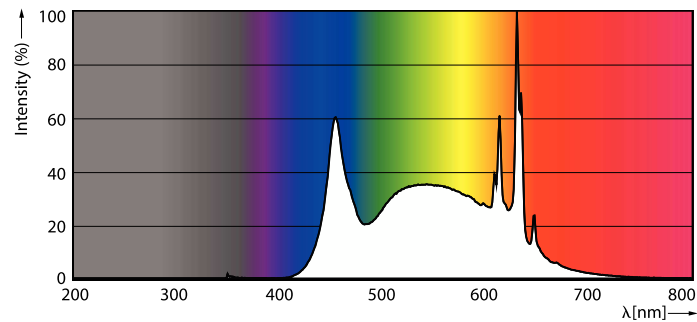


Spectral Power Distribution Colour - 14A19/COR/950/FR/P/E26/DIM/T20 6/1CT

Light Distribution Diagram - 14A19/COR/950/FR/P/E26/DIM/T20 6/1CT


CorePro Plastic (Dimmable) A-Shape Lamps

Photometric data




General uniform lighting - 14A19/COR/950/FR/P/E26/DIM/T20 6/1CT

Lifetime

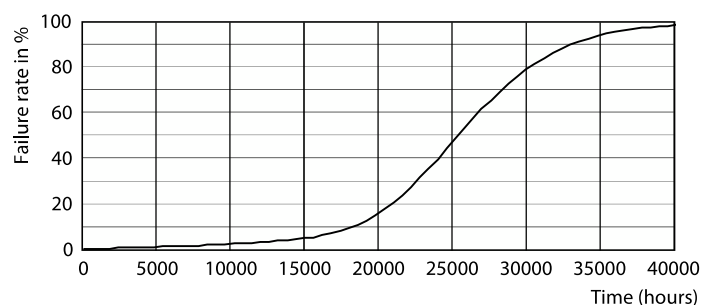

Life Expectancy Diagram

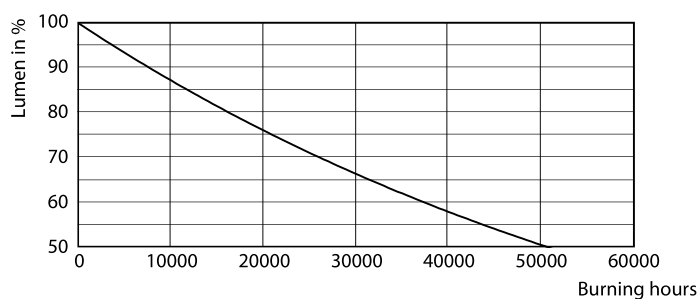

Lumen Maintenance Diagram - 14A19/COR/950/FR/P/E26/DIM/T20 6/1CT

