

LED InstantFit Lamps

14T5HE/46-835/IF20/G/DIM 10/1

Philips LED T8 InstantFit Lamps are an ideal energy saving choice for existing linear fluorescent fixtures.

Product data

General Information		Voltage (Nom)		70-105 V
Cap-Base	G5 [G5]	Temperature		
Nominal Lifetime (Nom)	50000 h	T-Ambient (Max)	45 °C	
Switching Cycle	50000X	T-Ambient (Min)	-20 °C	
B50L70	50000 h	T-Storage (Max)	65 °C	
Light Technical		T-Storage (Min)	-40 °C	
Color Code	835 [CCT of 3500K]	T-Case Maximum (Nom)	70 °C	
Beam Angle (Nom)	200 °	Controls and Dimming		
Initial lumen (Nom)	2000 lm	Dimmable	Yes	
Luminous Flux (Rated) (Nom)	2000 lm	Mechanical and Housing		
Rated Beam Angle	200 °	Product Length	1200 mm	
Correlated Color Temperature (Nom)	3500 K	Approval and Application		
Color Consistency	<6	Energy Saving Product	Yes	
Color Rendering Index (Nom)	82	Approbation Marks	UL certificate RoHS compliance	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product Data		
Operating and Electrical		Order product name	14T5HE/46-835/IF20/G/DIM 10/1	
Input Frequency	40000-110000 Hz	EAN/UPC - Product	046677476502	
Power (Rated) (Nom)	14 W	Order code	476507	
Lamp Current (Max)	350 mA	Numerator - Quantity Per Pack	1	
Lamp Current (Min)	150 mA	Numerator - Packs per outer box	10	
Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	0.5 s			
Power Factor (Nom)	0.9			


LED InstantFit Lamps

Material Nr. (12NC)	929001824004
Net Weight (Piece)	0.146 kg

Warnings and Safety

- Perform a visual inspection to ensure lamp holders (or sockets) are not damaged or loose. If the lamp holders (or sockets) are damaged, corroded, charred, blackened or loose, contact a qualified electrician for proper replacement.
- Please refer to the ballast compatibility guide located at www.philips.com/instantfit.



Dimensional drawing

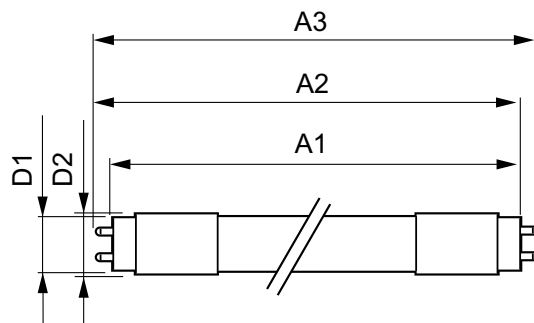


TLED 1200mm HFV16-28W 2100lm 3500K ND

Product	D1	D2	A1	A2	A3
14T5HE/46-835/IF20/G/DIM	15.3 mm	18.4 mm	1147.8 mm	1154.9 mm	1162 mm

Photometric data

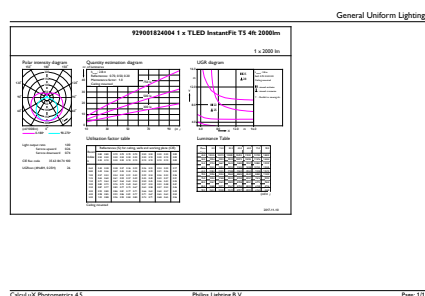



LEDtube 8W G5 830 200D DIM IF10

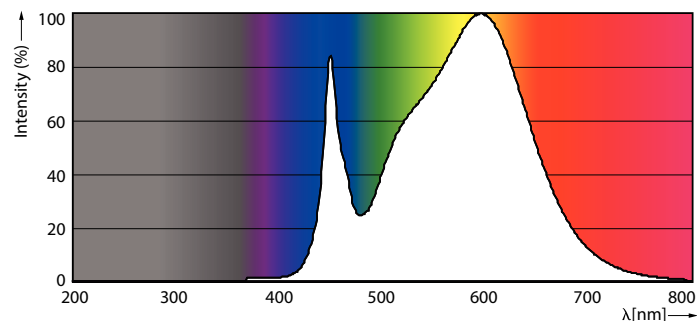

LEDtube 14W G5 835 200D DIM IF20



LED InstantFit Lamps

Lifetime

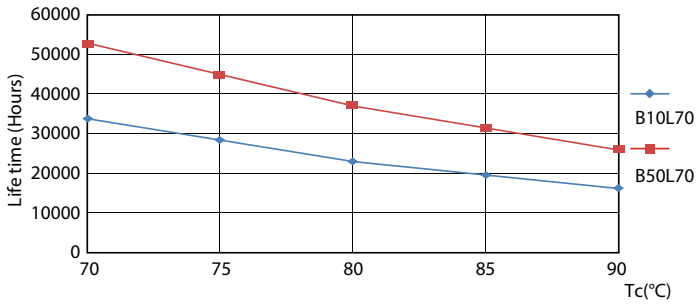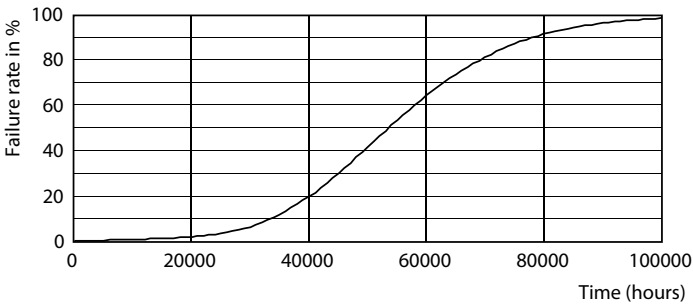


LEDtube 8-14W G5 830-850 200D DIM IF10-21

LEDtube 8-14W G5 830-850 200D DIM IF10-21

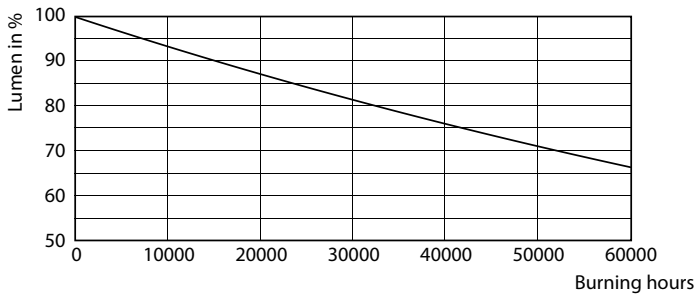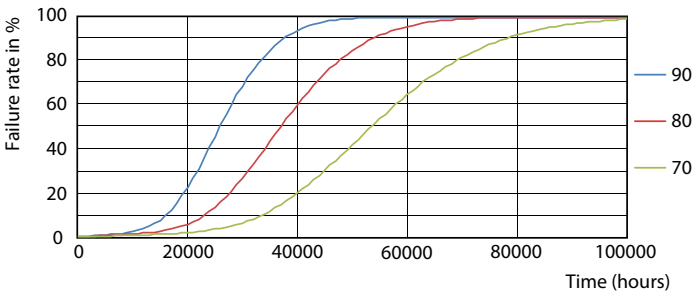

LEDtube 8-14W G5 830-850 200D DIM IF10-21

LEDtube 8-14W G5 830-850 200D DIM IF10-21

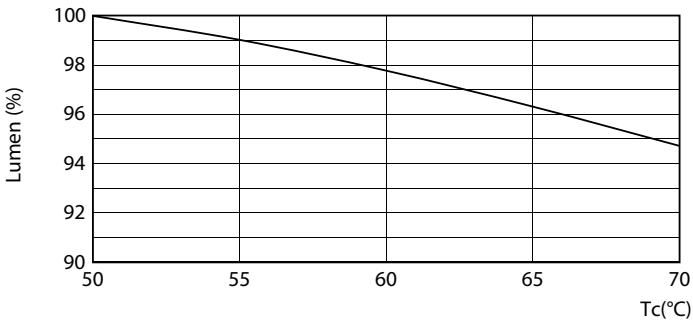

LEDtube 8-14W G5 830-850 200D DIM IF10-21

LED InstantFit Lamps

