

Presented By: Candela Corporation
Contact Phone: 800-922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:



GE
Lighting

13667 - 1962 TY

GE Quartzline® T3 - Low Voltage


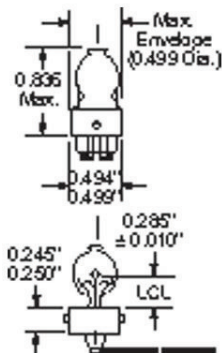


Photo
Not Available

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Lamp emits UV radiation which may cause eye/skin irritation.
 - Avoid exposure of eyes and skin to unshielded lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not touch glass with bare hands.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use protective screen when handling.

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3
Base	Wire Terminals
Filament	C-6
Rated Life (NOM)	50.0 h
Bulb Material	Quartz
Atmosphere	Gas-filled
Primary Application	Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1382.0
Nominal Initial Lumens per Watt (NOM)	22.29032
Mean Spherical Candlepower (MSCP) (NOM)	110.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	62.0
Voltage (NOM)	8.5

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.140 in(29.0 mm)
Bulb Diameter (DIA) (NOM)	0.375 in(9.5 mm)
Light Center Length (LCL) (NOM)	0.285 in(7.2 mm)

PRODUCT INFORMATION

Product Code	13667
Description	1962 TY
ANSI Code	1962TY
Standard Package	Case
Standard Package GTIN	20043168136673
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168136679