



LED PAR30 S/L

9.4PAR30L/COR/930/F40/DIM/120V T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data


General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	9.4-75W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	40 °
Initial lumen (Nom)	850 lm
Luminous Intensity (Nom)	1315 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	9.4 W
Lamp Current (Nom)	90 mA
Wattage Equivalent	75 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	9.4PAR30L/COR/930/F40/DIM/120V T20 6/1FB
EAN/UPC - Product	046677546977
Order code	546977
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002045504

LED PAR30 S/L

Net Weight (Piece) 0.285 kg


Dimensional drawing




JA8 PAR30L 9.4-75W 850lm 40D 3000K E26 D

Product	D	C
9.4PAR30L/COR/930/F40/DIM/120V T20 6/1FB	97 mm	119 mm


Photometric data

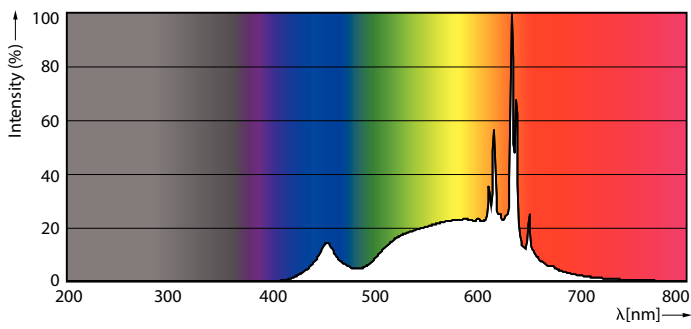

LEDspots 9,4W PAR30L E26 930 40D



LEDspots 9,4W PAR30L E26 930 40D




© 2020 Philips Lighting B.V. All rights reserved. Page 11

LEDspots 9,4W PAR30L E26 930 40D

LED PAR30 S/L

Lifetime

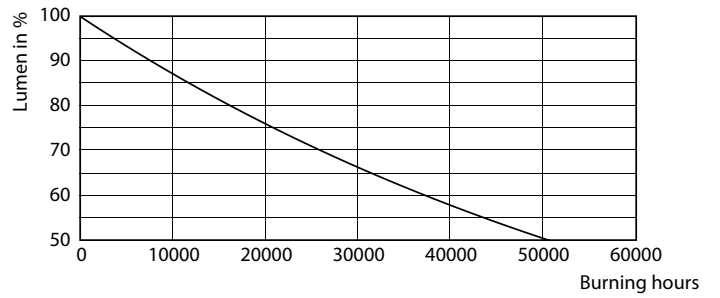

LEDspots LED 25K

LEDspots LMP 25K

