

BNSP2

ARCHITECTURAL AREA/SITE

FEATURES

- Available in 595nm, 3000K, 4000K and 5000K standard CCT
- High performance optics up to 9,264 delivered lumens
- Type 1, 2, 3, 4, 4W, 5QM distributions
- 0-10V dimming drivers standard
- Sealed optical chamber, IP66 certified



3000K and warmer CCTs only

See Certification Specifications

CONTROL TECHNOLOGY

SPECIFICATIONS

CONSTRUCTION

- One piece non die-cast housing, low copper (<0.6% Cu) Aluminum Alloy with integral cooling ribs over the optical chamber and electrical compartment
- Double-thick wall with gussets on the support-arm mounting end
- Housing forms a half cylinder with 55° front face plane providing a recess to allow a flush single-latch detail
- All hardware is stainless steel or electro-zinc plated steel
- Finish: fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat
- Clear 1/8" thick tempered glass lens retained by eight steel clips with full silicone gasketing around the perimete
- Optional, fixture supplied with a one-piece flat, clear, UV stabilized polycarbonate, fully gasketed, replacing the standard tempered glass lens. CAUTION: Use only when vandalism is anticipated to be high. Useful life is limited by UV discoloration from sunlight. A program of regular inspection and periodic replacement is highly recommended to maintain optimum fixture performance

OPTICS

- Optical cartridge system consisting of a die cast heat sink, LED engine, TIR optics, gasket and bezel plate
- Molded silicone gasket ensures a weather-proof seal around each individual LED

OPTICS (CONTINUED)

- Features revolutionary individual LED optical control based on high performance TIR optical designs
- Optional BackLight Control for complete control of unwanted backlight.
- IP66 Optical assembly
- Type 1, 2, 3, 4, 4W, and 5QM standard distributions Custom available
- 3000K, 4000K, 5000K standard CCT. Amber and custom available
- Die-cast, low copper aluminum heat sink modules provide thermal transfer at PCB level, clear lens is standard.
- Anodized aluminum heat sink modules

INSTALLATION

- Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury

ELECTRICAL

- Dimming range from 10% to 100% through the use of standard 0-10V interface on the programmable driver
- Modular wiring harness in the service area provides user access to the dimming circuitry
- Optional factory programmed dimming profile
- Surge protection: 10kV surge suppression
- SF for 120, 277, 347 Line volts
DF for 208, 240, 480 Line volts
- Wiring: 14GA wires rated 150°C

Bounce®



Bounce Small

RELATED PRODUCTS

Bounce Bollard

Bounce UpGrade Kit

BNM

CONTROLS

- Standard photocell and 7 pin receptacle

CERTIFICATIONS AND LISTINGS

- Listed to UL1598 and CSA C22.2#250.0-24 for wet locations
- RoHS compliant
- IDA approved, 3000K and warmer CCTs only
- This product qualifies as a "designated country construction material" per FAR 52.225-11 Buy American-Construction Materials under Trade Agreements effective 6/06/2020. See Buy American Solutions

WARRANTY

- 5 year warranty

KEY DATA	
Lumen Range	1,780 - 9,264
Wattage Range	47.67 - 91.24W
Efficacy Range (LPW)	33 -115 lm/W
Reported Life (Hours)	L70/>60,000
Weight	26 lbs - 11.8 Kg
EPA	1.2

BNSP2

ARCHITECTURAL AREA/SITE

ORDERING GUIDE

Example: BNS2-36L-615-3K7-3-UNV-BLS-A25-7-PL-4.5

CATALOG #

HOUSING

BNS2											
Model	Mounting	Engine	CCT	Distribution	Voltage	Finish					
BNSP2 Bounce 2.0	PT	Post Top	36L-400 400mA, 4,000 lm	AMB Amber 595nm Peak	1 Type I 2 Type II 3 Type III 4 Type IV 4W Type IV Wide 5QM Type V Square	UNV 120-277V 347 347V 480 480V	BLS Black Gloss Smooth				
	FM	Flush Mount, for use with pole diameters from 3.375" through 5"	36L-615 615mA, 6,000 lm	3K7 3000K, 70 CRI			BLT Black Matte Textured				
			36L-800 800mA, 7,500 lm	4K7 4000K, 70 CRI			DBS Dark Bronze Gloss Smooth				
				5K7 5000K, 70 CRI			DBT Dark Bronze Matte Textured				
					GTT Graphite Matte Textured						
						LGS Light Grey Gloss Smooth					
						LGT Light Grey Matte Textured					
						PSS Platinum Silver Gloss Smooth					
						VGT Verde Green Matte Textured					
						WHS White Gloss Smooth					
						WHT White Matte Textured					
						Color Option					
						CC Custom Color ²					

Photocell Options	Fuse Options	Lens Options	NFO Option	Pole Shaft Length
7PR 7-Pin Receptacle	SF	CGL Convex Glass Lens CP Clear Poly Lens	BC Backlight control available for Type III/IV. All others, consult factory.	8 8'0" & Under
	DF			10 8" thru 10'0"
	Single Fuse for 120, 277, 347 Line volts			12 10" thru 12'0"
	Double Fuse for 208, 240, 480 Line volts			14 12" thru 14'0"
				16 14" thru 16'0"
				20 16" thru 20'0"



- 1 Not available with 5W distributions.
- 2 Consult factory for custom color
- 3 Not available with other sensor or wireless control options
- 4 Not available with 347V and 480V.

- 5 Specify group and zone at time of order. See www.hubbellighting.com/sitesync for more details. Order at least one SiteSync interface accessory SWUSB or SWTAB. Each option contains SiteSync License, GUI, and Bridge Node.

BNSP2

ARCHITECTURAL AREA/SITE

DIMENSIONS



Flush Mount
slips into a 3.375" Ø - 5" Ø open top pole or tenon with up to .25" profile thickness

Post Top
slips over a 2 3/8" Ø pole or tenon with 4" of engagement

PRODUCT EXCEPTIONS & DETAILS

Configuration		EPA
	1SA 1 Arm Side Mount	0.9
	2SB 2 Arm Side Mount	1.8
	2SL 2 Arm Side Mount	1.6
	3ST 3 Arm Side Mount	2.5

Configuration		EPA
	3SY* 3 Arm Side Mount	2.5
	4SC 4 Arm Side Mount	2.46
	1W Single Wall Mount	n/a

BNSP2

ARCHITECTURAL AREA/SITE

DELIVERED LUMENS

STANDARD CLEAR GIASS LENS

LEDs #	Lumens Package	Drive Current (mA)	Nominal Watts	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI						
					Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w
						B	U	G			B	U	G			B	U	G	
36L	4,000	400	48	1	4837	1	0	0	101.5	4935	1	0	0	103.5	4945	1	0	0	103.7
				1-BC	2383	0	0	0	50.0	2431	0	0	0	51.0	2436	0	0	0	51.1
				2	4619	1	0	1	96.9	4712	1	0	1	98.8	4722	1	0	1	99.0
				2-BC	1923	0	0	0	40.3	1962	0	0	0	41.2	1966	0	0	0	41.2
				3	4240	1	0	1	88.9	4325	1	0	1	90.7	4334	1	0	1	90.9
				3-BC	1889	0	0	0	39.6	1927	0	0	0	40.4	1931	0	0	0	40.5
				4	4755	1	0	1	99.7	4850	1	0	1	101.7	4860	1	0	1	102.0
				4-BC	2612	0	0	1	54.8	2664	0	0	1	55.9	2670	0	0	1	56.0
				4W	4352	1	0	1	91.3	4440	1	0	1	93.1	4449	1	0	1	93.3
				4W-BC	1780	0	0	0	37.3	1816	0	0	0	38.1	1820	0	0	0	38.2
	5QM	4844	2	0	0	101.6	4941	2	0	0	103.7	4951	2	0	0	103.9			
	6,000	615	71	1	6673	1	0	1	94.5	6808	1	0	1	96.4	6822	1	0	1	96.6
				1-BC	3288	0	0	0	46.5	3354	0	0	0	47.5	3361	0	0	0	47.6
				2	6372	1	0	1	90.2	6500	1	0	1	92.0	6514	1	0	1	92.2
				2-BC	2653	0	0	0	37.6	2707	0	0	0	38.3	2712	0	0	0	38.4
				3	5849	1	0	1	82.8	5967	1	0	1	84.5	5979	1	0	1	84.6
				3-BC	2606	0	0	0	36.9	2659	0	0	0	37.6	2664	0	0	0	37.7
				4	6560	1	0	2	92.9	6692	1	0	2	94.7	6705	1	0	2	94.9
				4-BC	3603	0	0	1	51.0	3676	0	0	1	52.0	3683	0	0	1	52.1
				4W	6004	1	0	2	85.0	6125	1	0	2	86.7	6137	1	0	2	86.9
				4W-BC	2456	0	0	0	34.8	2505	0	0	0	35.5	2511	0	0	0	35.5
	5QM	6682	3	0	0	94.6	6817	3	0	0	96.5	6831	3	0	0	96.7			
	7,500	800	91	1	8174	1	0	1	89.3	8338	1	0	1	91.1	8355	1	0	1	91.2
				1-BC	4027	0	0	0	44.0	4108	0	0	0	44.9	4116	0	0	0	45.1
				2	7805	1	0	1	85.3	7962	2	0	1	87.0	7978	2	0	1	87.0
				2-BC	3250	0	0	0	35.5	3315	0	0	0	36.2	3322	0	0	0	36.5
				3	7164	1	0	2	78.6	7308	1	0	2	80.5	7323	1	0	1	80.3
				3-BC	3192	0	0	0	34.9	3256	0	0	0	35.6	3263	0	0	0	35.9
				4	8034	1	0	2	87.8	8196	1	0	2	89.6	8212	1	0	2	88.2
				4-BC	4413	0	0	1	48.2	4502	0	0	1	49.2	4511	0	0	1	48.7
4W				7354	1	0	2	80.4	7502	1	0	2	82.0	7517	1	0	2	82.1	
4W-BC				3008	0	0	1	32.9	3069	0	0	1	33.5	3075	0	0	1	33.8	
5QM	8184	3	0	1	89.4	8349	3	0	1	91.2	8366	3	0	1	91.2				

BNSP2

ARCHITECTURAL AREA/SITE

DELIVERED LUMENS (CONTINUED)

CP (CLEAR POLYCARBONATE)

LEDs #	Lumens Package	Drive Current (mA)	Nominal Watts	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI						
					Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w
						B	U	G			B	U	G			B	U	G	
36L	4,000	400	48	1	5153	1	3	0	108.1	5256	1	3	0	110.3	5267	1	3	0	110.5
				1-BC	2527	0	2	0	53.0	2578	0	2	0	54.1	2583	0	2	0	54.2
				2	4898	1	3	1	102.7	4997	1	3	1	104.8	5007	1	3	1	105.0
				2-BC	2039	0	2	0	42.8	2080	0	2	0	43.6	2084	0	2	0	43.7
				3	4498	1	3	1	94.4	4589	1	3	1	96.3	4598	1	3	1	96.5
				3-BC	2005	0	2	0	42.1	2045	0	2	0	42.9	2049	0	2	0	43.0
				4	4933	1	3	1	103.5	5032	1	3	1	105.6	5042	1	3	1	105.8
				4-BC	2725	0	2	1	57.2	2780	0	2	1	58.3	2785	0	2	1	58.4
				4W	4597	1	3	1	96.4	4689	1	3	1	98.4	4699	1	3	1	98.6
				4W-BC	1879	0	2	0	39.4	1916	0	2	0	40.2	1920	0	2	0	40.3
	5QM	5111	2	3	0	107.2	5213	2	3	0	109.4	5224	2	3	0	109.6			
	6,000	615	71	1	7109	1	3	1	100.6	7252	1	3	1	102.6	7266	1	3	1	102.9
				1-BC	3487	0	3	0	49.4	3557	0	3	0	50.3	3564	0	3	0	50.4
				2	6757	1	3	1	95.6	6893	1	3	1	97.6	6907	1	3	1	97.8
				2-BC	2813	0	2	0	39.8	2869	0	2	0	40.6	2875	0	2	0	40.7
				3	6205	1	3	1	87.8	6330	1	3	1	89.6	6343	1	3	2	89.8
				3-BC	2766	0	2	0	39.1	2821	0	2	0	39.9	2827	0	2	0	40.0
				4	6805	1	3	2	96.3	6942	1	3	2	98.3	6956	1	3	2	98.5
				4-BC	3759	0	2	1	53.2	3835	0	2	1	54.3	3842	0	2	1	54.4
				4W	6342	1	3	2	89.8	6469	1	3	2	91.6	6482	1	3	2	91.8
				4W-BC	2592	0	2	0	36.7	2644	0	2	0	37.4	2649	0	2	0	37.5
	5QM	7050	3	3	1	99.8	7192	3	3	1	101.8	7207	3	3	1	102.0			
	7,500	800	91	1	8707	1	3	1	95.4	8882	1	3	1	97.3	8900	1	3	1	97.5
				1-BC	4270	0	3	0	46.8	4356	0	3	0	47.7	4365	0	3	0	47.8
				2	8276	2	3	1	90.7	8442	2	3	1	92.5	8460	2	3	1	92.7
				2-BC	3445	0	3	0	37.8	3514	0	3	0	38.5	3521	0	3	0	38.6
				3	7600	1	3	1	83.3	7753	1	3	2	85.0	7769	1	3	2	85.0
				3-BC	3387	0	2	0	37.1	3455	0	2	0	37.9	3462	0	2	0	37.9
				4	8334	1	3	2	91.3	8502	1	3	2	93.2	8519	1	3	2	91.5
				4-BC	4604	0	2	1	50.5	4697	0	2	1	51.5	4706	0	2	1	50.8
4W				7767	1	3	2	85.1	7923	1	3	2	86.8	7940	1	3	2	87.0	
4W-BC				3174	0	2	1	34.8	3238	0	2	1	35.5	3245	0	2	1	35.6	
5QM	8184	3	0	1	89.4	8349	3	0	1	91.2	8366	3	0	1	91.2				

BNSP2

ARCHITECTURAL AREA/SITE

DELIVERED LUMENS (CONTINUED)

SAG LENS (CGL)

LEDs #	Lumens Package	Drive Current (mA)	Nominal Watts	Distribution	3000K 70CRI					4000K 70CRI					5000K 70CRI				
					Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w	Lumen	BUG Rating			lm/w
						B	U	G			B	U	G			B	U	G	
36L	4,000	400	48	1	5364	1	3	1	112.5	5472	1	3	1	114.8	5483	1	3	1	115.0
				1-BC	2631	0	2	0	55.2	2684	0	2	0	56.3	2689	0	2	0	56.4
				2	5099	1	3	1	107.0	5201	1	3	1	109.1	5212	1	3	1	109.3
				2-BC	2122	0	2	0	44.5	2165	0	2	0	45.4	2169	0	2	0	45.5
				3	4682	1	3	1	98.2	4776	1	3	1	100.2	4786	1	3	1	100.4
				3-BC	2087	0	2	0	43.8	2129	0	2	0	44.7	2133	0	2	0	44.7
				4	5250	1	3	1	110.1	5355	1	3	1	112.3	5366	1	3	1	112.6
				4-BC	2868	0	2	1	60.2	2926	0	2	1	61.4	2932	0	2	1	61.5
				4W	4785	1	3	1	100.4	4881	1	3	1	102.4	4891	1	3	1	102.6
				4W-BC	1956	0	2	0	41.0	1995	0	2	0	41.8	1999	0	2	0	41.9
	5QM	5320	2	3	0	111.6	5427	2	3	0	113.8	5438	2	3	0	114.1			
	6,000	615	71	1	7400	1	3	1	104.7	7548	1	3	1	106.8	7564	1	3	1	107.1
				1-BC	3629	0	3	0	51.4	3702	0	3	0	52.4	3710	0	3	0	52.5
				2	7034	1	3	1	99.6	7175	1	3	1	101.6	7190	1	3	1	101.8
				2-BC	2928	0	2	0	41.4	2987	0	2	0	42.3	2993	0	2	0	42.4
				3	6459	1	3	1	91.4	6589	1	3	1	93.3	6603	1	3	1	93.5
				3-BC	2879	0	2	0	40.7	2937	0	2	0	41.6	2943	0	2	0	41.7
				4	7242	1	3	2	102.5	7388	1	3	2	104.6	7403	1	3	2	104.8
				4-BC	3957	0	2	1	56.0	4037	0	2	1	57.1	4045	0	2	1	57.3
				4W	6601	1	3	2	93.4	6734	1	3	2	95.3	6748	1	3	2	95.5
				4W-BC	2698	0	2	0	38.2	2752	0	2	0	39.0	2758	0	2	0	39.0
	5QM	7339	3	3	1	103.9	7487	3	3	1	106.0	7502	1	0	2	106.2			
	7,500	800	91	1	9063	1	3	1	99.3	9245	1	3	1	101.3	9264	1	3	1	101.5
				1-BC	4445	0	3	0	48.7	4534	0	3	0	49.7	4544	0	3	0	49.8
				2	8615	2	3	1	94.4	8788	2	3	1	96.3	8806	2	3	1	96.5
				2-BC	3586	0	3	0	39.3	3658	0	3	0	40.1	3666	0	3	0	40.2
				3	7911	1	3	2	86.7	8070	1	3	2	88.5	8087	1	3	2	88.5
				3-BC	3526	0	2	0	38.6	3597	0	2	0	39.4	3604	0	2	0	39.5
				4	8870	1	3	2	97.2	9049	1	3	2	99.2	9067	1	3	2	99.4
				4-BC	4847	0	3	1	53.1	4944	1	3	1	54.2	4954	1	3	1	54.3
4W				8085	1	3	2	88.6	8248	1	3	2	90.4	8265	1	3	2	90.6	
4W-BC				3304	0	2	1	36.2	3371	0	2	1	36.9	3378	0	2	1	37.0	
5QM	8989	3	3	1	98.5	9169	3	3	1	100.5	9188	3	3	1	100.7				

BNSP2

ARCHITECTURAL AREA/SITE

PHOTOMETRY

BNS2-36L-800-4K7-1


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	8338
Watts	91.24
Efficacy	91.4
IES Type	I
BUG Rating	B1-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	7162	85.9%
Downward House Side	1176	14.0%
Downward Total	8338	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	8338	100%

ISOFOOT CANDLE PLOT

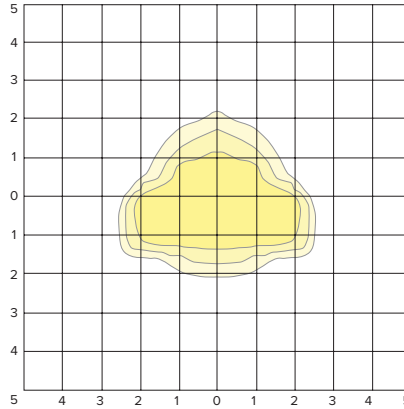

BNS2-36L-800-4K7-1-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	4107
Watts	91.24
Efficacy	45.0
IES Type	I
BUG Rating	B0-U0-G0
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	3875	94.3%
Downward House Side	232	5.7%
Downward Total	4107	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	4107	100%

ISOFOOT CANDLE PLOT

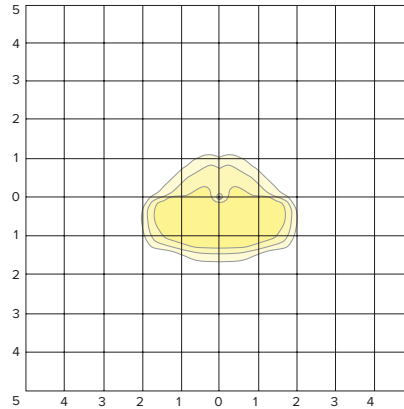

BNS2-36L-800-4K7-2


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	7962
Watts	91.24
Efficacy	87.3
IES Type	II
BUG Rating	B2-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	6239	78.4%
Downward House Side	1724	21.6%
Downward Total	7963	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	7963	100%

ISOFOOT CANDLE PLOT

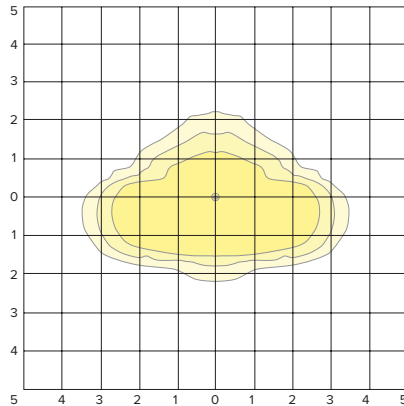

BNSP2

ARCHITECTURAL AREA/SITE

PHOTOMETRY

BNS2-36L-800-4K7-2-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	3315
Watts	91.24
Efficacy	36.3
IES Type	II
BUG Rating	B0-U0-G0
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	3054	92.0%
Downward House Side	261	7.9%
Downward Total	3315	99.9%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	3315	100%

ISOFOOT CANDLE PLOT

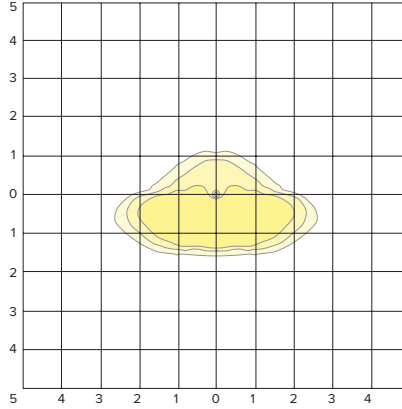

BNS2-36L-800-4K7-3


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	7308
Watts	91.24
Efficacy	80.1
IES Type	III
BUG Rating	B1-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	5838	79.9%
Downward House Side	1470	20.1%
Downward Total	7308	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	7308	100%

ISOFOOT CANDLE PLOT

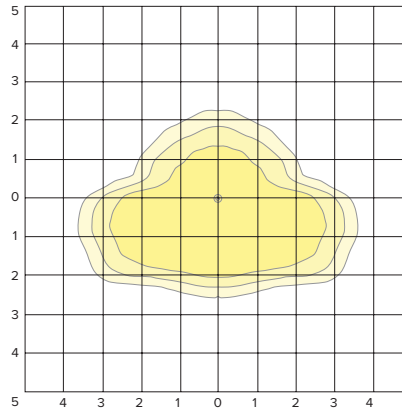

BNS2-36L-800-4K7-3-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	3257
Watts	91.24
Efficacy	35.7
IES Type	III
BUG Rating	B3-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	2974	91.3%
Downward House Side	283	8.7%
Downward Total	3257	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	3257	100%

ISOFOOT CANDLE PLOT

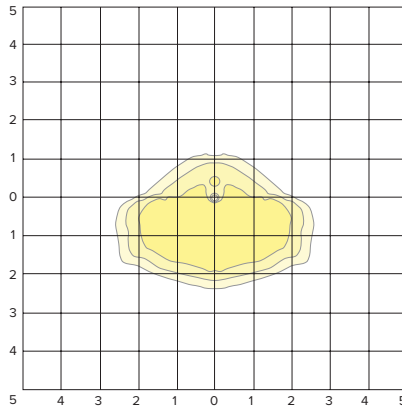

BNSP2

ARCHITECTURAL AREA/SITE

PHOTOMETRY

BNS2-36L-800-4K7-4


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	8196
Watts	91.24
Efficacy	89.8
IES Type	IV
BUG Rating	B1-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	6907	84.0%
Downward House Side	1290	16.0%
Downward Total	8197	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	8197	100%

ISOFOOT CANDLE PLOT

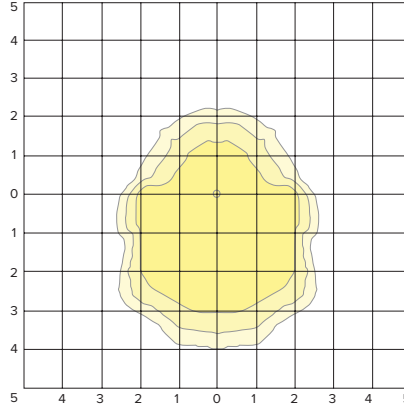

BNS2-36L-800-4K7-4-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	4502
Watts	91.24
Efficacy	49.3
IES Type	IV
BUG Rating	B0-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	4157	92.3%
Downward House Side	346	7.7%
Downward Total	4503	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	4503	100%

ISOFOOT CANDLE PLOT

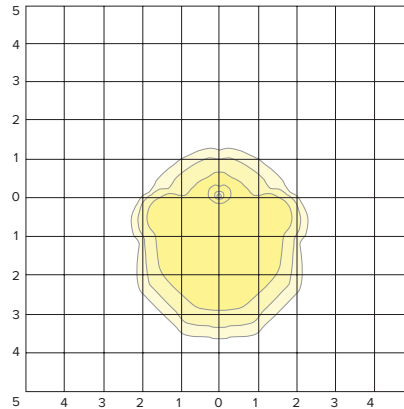

BNS2-36L-800-4K7-4W


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	7502
Watts	91.24
Efficacy	82.2
IES Type	IV
BUG Rating	B1-U0-G2
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	6115	81.5%
Downward House Side	1387	18.5%
Downward Total	7502	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	7502	100%

ISOFOOT CANDLE PLOT

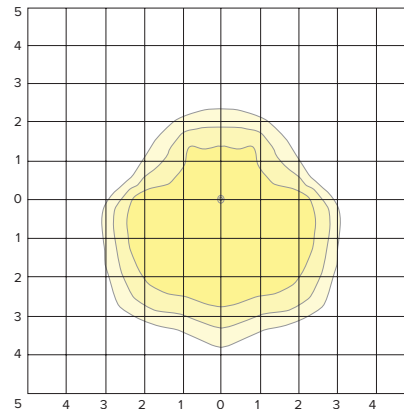

BNSP2

ARCHITECTURAL AREA/SITE

PHOTOMETRY

BNS2-36L-800-4K7-4W-BC


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	3069
Watts	91.24
Efficacy	33.6
IES Type	IV
BUG Rating	B0-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	2752	89.6%
Downward House Side	317	10.4%
Downward Total	3069	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	3069	100%

ISOFOOT CANDLE PLOT

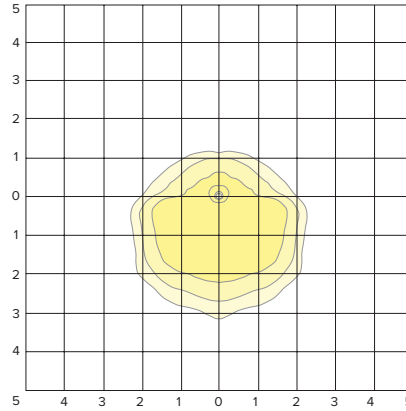

BNS2-36L-800-4K7-5QM


LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	8349
Watts	91.24
Efficacy	91.5
IES Type	V
BUG Rating	B3-U0-G1
Mounting Height	15 ft
Grid Scale	10 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	4175	50.0%
Downward House Side	4175	50.0%
Downward Total	8349	100.0%
Upward Street Side	0	0.0%
Upward House Side	0	0.0%
Upward Total	0	0.0%
Total Flux	8349	100%

ISOFOOT CANDLE PLOT

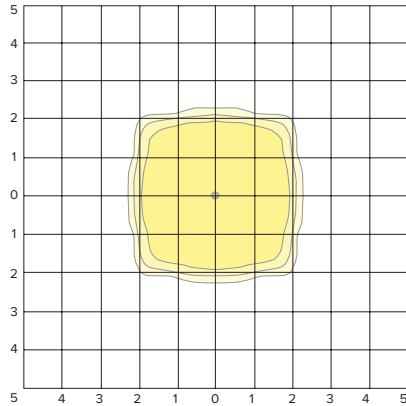


BNSP2

ARCHITECTURAL AREA/SITE

TM-30 DATA

COLOR VECTOR GRAPHIC

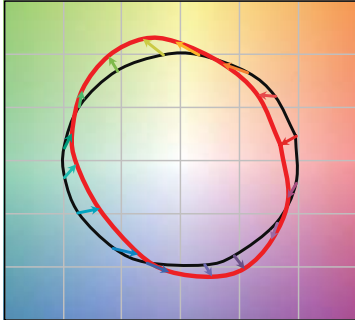


— Reference Illuminant — Test Source

TEST SOURCE

R _f	68
R _g	99
CCT(K)	3947
D _{uv}	0.0004
x	0.3831
y	0.3793
CIE R _a	72

SPECTRAL POWER DISTRIBUTION COMPARISON

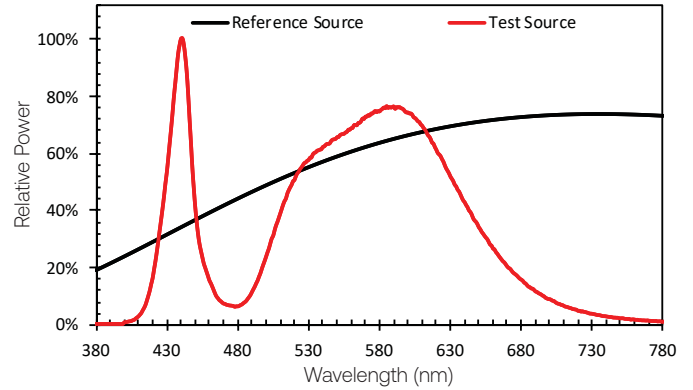

ELECTRICAL DATA

Electrical Characteristics											Dimming						
Drive Current (mA)	LED Count	System Watts	Line Voltage		Amps AC						Min. Power Factor	Max THD (%)	Dimming Range	Source current out of 0-10V		Absolute voltage range on 0-10V (+)	
			VAC	Hz	120	208	240	277	347	480				Min	Max	Min	Max
400	36L	47.67	120-480	50/60	0.40	0.23	0.20	0.17	0.14	0.10	>0.9	20	10% to 100%	0mA	1mA	0V	10V
615		70.65			0.59	0.34	0.29	0.26	0.20	0.15							
800		91.24			0.76	0.44	0.38	0.33	0.26	0.19							

TM-21 Lifetime Calculation - Projected Lumen Maintenance (25°C / 77°C)						
Ambient Temp.	0	25,000	36,000	50,000	100,000	Reported L70
25°C / 77°F	100%	96.83%	95.24%	93.24%	86.46%	>60khrs

CRI Lumen Multiplier	
CCT	80 CRI
3000K	0.9119
4000K	0.8941

Amber	
CCT	Multiplier
5000K	1
AM	0.1727

* Multiple drivers used for this output, drive current listed is per driver