



Cartridge Lamps

USE IN INDICATOR LIGHT HOUSING SHOWN BELOW


LENS COLORS: RED (R) AMBER (A) YELLOW (Y)
GREEN (G) WHITE (W)
BLUE (B) CLEAR (C)

SPECIFY COLOR () AFTER PART NUMBER.

LENS COLORS ARE TRANSLUCENT/SOLID (EXCEPT NEON)

NEON LENS COLORS ARE TRANSPARENT/CLEAR DUE TO LOWER LIGHT OUTPUT.

NEON LENS COLORS GREEN AND BLUE REQUIRE A CORRESPONDING
COLOR INTERNAL NEON LAMP. (G2B, B2B)

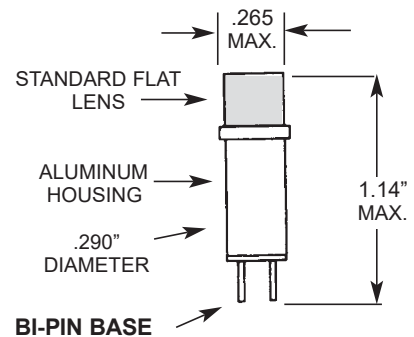

LINE NO.	VOLTS	mA	INTERNAL LAMP	LIFE HOURS	TYPE	PART NUMBER
1	6.0	200	2181	50,000	INCANDESCENT	CFB-6
2	12.0	40	2174	20,000	INCANDESCENT	CFB-12
3	14.0	80	2182	20,000	INCANDESCENT	CFB-14
4	18.0	40	2102	20,000	INCANDESCENT	CFB-18
5	28.0	40	2185	25,000	INCANDESCENT	CFB-28
6	48.0	25	6748	6,000	INCANDESCENT	CFB-48
7						
8	120.0	2	C2A/30K	25,000	NEON w/RESISTOR	CFB-120
9	240.0	2	C2A/100K	25,000	NEON w/RESISTOR	CFB-240

NOTE: CAN BE SUPPLIED IN L.E.D. TYPE ON SPECIAL ORDER ONLY. (100,000+ LIFE HOURS)


Relampable Indicator Lights (HOUSING)

USES REPLACEABLE CARTRIDGE LAMPS

6V - 120V RANGE

.375" MOUNTING HOLE • .400" MAX. PANEL THICKNESS

RETAINING COLLAR AVAILABLE

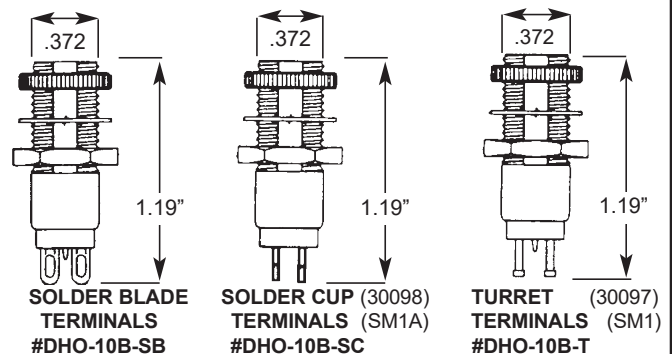

Retaining Collar

SECURELY RETAINS CARTRIDGE LAMP IN HOUSING.

