



# LED A14 Bulb, Dimmable, Clear, 1.5W

Replaces Incandescents up to 15 Watts – Omnidirectional – 120VAC – E26 Base



## FEATURES

- 2 Year LEDtronics Limited Warranty
- Direct Retrofit into E26 Edison Base Fixtures
- Lumen Maintenance over 70% @ 50,000+ Hours
- Omnidirectional Beam Pattern / High CRI: 80+
- Energy Savings of up to 85%
- Dimmable with Standard Lamp Dimmers
- Water-Clear Tempered Glass Lens

## APPLICATIONS

- For Indoor/Outdoor Use
- Architectural / Décor Lighting
- Marquee & Sign Lights
- Store Front Displays & Retail Display Cases
- Accent Lighting

Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience


**E26 BASE  
CLEAR**



Replaces Incandescent Bulbs  
up to 15 Watts

## DEC-A14C-1W-XHW-120AWD

Input Power	1.5 Watts
Input Voltage	120VAC
Total Lumens	125 lm
Max. Candela	15 cd
Power Factor	0.75
Efficacy	85 lm/W
CRI	>80
Color	Halogen White
Color Temperature	2400K~2700K
Illumination Angle	Omnidirectional
Oper. Temperature	-4°F ~+113°F (-20°C ~+45°C)
Protection Rating	IP40
Heatsink	Aluminum / Silver
Lens	Tempered Glass / Clear
Dimensions	3.52 x 0.177 inch / 90 x 045 mm
Net Weight	0.125 lb / 2.0 oz / 56.7 g

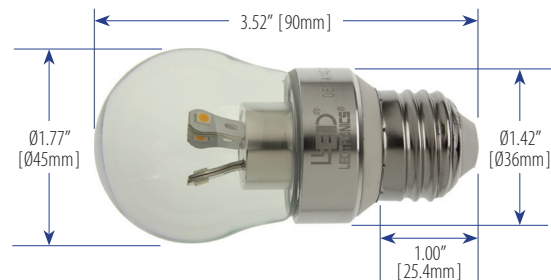

# LED A14 Bulb, Dimmable, Clear, 1.5 Watt

## PHOTOMETRIC REPORT:

## DEC-A14C-1W-XHW-120AWD

### Filename: DEC-A14C-1W-XHW-120AWD

Luminaire: CLEAR LENS, DIM, 120VAC, 1.4W  
 Luminaire Cat: DEC-A14C-1W-XHW-120AWD  
 Lamp: . LUMEN RATING: 126.9 Lms.  
 Lamp Output: 1 lamp(s), rated Lumens/lamp: 126.9  
 Max Candela: 16.5 at Horizontal: 0°, Vertical: 80°  
 Luminous Opening: Point  
 Test: 3-10-14  
 Photometry : Type C  
 CIE Class: General Diffuse  
 Cutoff Class: Noncutoff

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	8.7	6.8%	6.8%
0-40	15.7	12.4%	12.4%
0-60	37.2	29.3%	29.3%
60-90	38.9	30.6%	30.6%
70-100	35.4	27.9%	27.9%
90-120	31.5	24.8%	24.8%
0-90	76.0	59.9%	59.9%
90-180	50.9	40.1%	40.1%
0-180	126.9	100%	100%

