


HALOGEN LAMPS

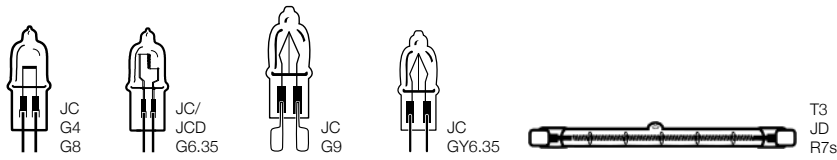

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Color Temp	Avg. Life	Design Filament	MOL	Beam Spread
------	------	----------------	-----------	--------------	-------------	-----------	-------	--------	------------	-----------	-----------------	-----	-------------

PRISM & HaloXen. JC Type continued

50 WATT

T4	G6.35	107014	3	JC50	Clear	10/1000	12	900	2950	3000	C-8	1.65"	-
		107716	2,3	JC50/HX	Clear HaloXen®	10/1000	12	900	3000	10000	C-8	1.60"	-
	GY6.35	107015	3	JCD50	Clear	10/500	130	600	2900	2000	CC-2	1.69"	-
	G8	107074	3	JCD50/G8	Clear	10/500	130	600	2900	2000	CC-2	1.69"	-

60 WATT

T4	G9	71002	3	JCD60/G9	Clear	10/500	130	780	2950	2000	CC-2V	1.69"	-
		107904	3	JCD60FR/G9	Frost	10/500	130	750	2950	2000	CC-2V	1.69"	-

75 WATT

T4	GY6.35	107002	3	JC75	Clear	10/1000	12	1350	3000	3000	C-8	1.69"	-
		107001	3	JCD75	Clear	10/500	130	980	2950	2000	CC-2V	1.69"	-

100 WATT

T4	GY6.35	107004	3	JC100	Clear	10/1000	12	2100	3100	3000	C-8	1.69"	-
		107003	3	JCD100	Clear	10/500	130	1400	3050	2000	CC-2V	1.69"	-
	G8	107070	3	JCD100/G8	Clear	10/500	130	1400	3050	2000	CC-2V	1.69"	-

Bulb	Base	Product Number	Footnotes	Product Code	ANSI	Description	Pkg. Qty.	Volts	Lumens	Color Temp	Avg. Life	Design Filament	MOL	Beam Spread
------	------	----------------	-----------	--------------	------	-------------	-----------	-------	--------	------------	-----------	-----------------	-----	-------------

PRISM J Type Double Ended

75 WATT

T3	R7s	107210	3,8,9	Q75T3C/S	-	Clear 78mm	10/500	130	1250	2850	2000	C-8	3.07"	-
----	-----	--------	-------	----------	---	------------	--------	-----	------	------	------	-----	-------	---

100 WATT

T3	R7s	107182	3,8,9	Q100T3C	-	Clear 118mm	10/500	130	1400	2950	2000	C-8	4.68"	-
		107184	3,8,9	Q100T3C/S	-	Clear 78mm	10/500	130	1400	2950	2000	C-8	3.11"	-

150 WATT

T3	R7s	107186	3,8,9	Q150T3C	-	Clear 118mm	10/500	130	2250	2950	2000	C-8	4.68"	-
		107188	3,8,9	Q150T3C/S	-	Clear 78mm	10/500	130	2400	2950	2000	C-8	3.07"	-
		107214	3,8,9	Q150T3C/12V	-	Clear 83mm Pool	10/500	12	2500	2950	2000	C-8	3.27"	-

200 WATT

T3	R7s	107190	3,8,9	Q200T3C	-	Clear 118mm	10/500	130	3200	2950	2000	C-8	4.68"	-
		107192	3,8,9	Q200T3C/S	-	Clear 78mm	10/500	130	3200	2950	2000	C-8	3.11"	-

250 WATT

T3	R7s	107208	3,8,9	Q250T3C/S	-	Clear 78mm	10/500	130	4000	2950	2000	C-8	3.11"	-
		107216	3,8,9	Q250T3C/83MM	-	Clear 83mm Pool	10/500	130	4000	2950	2000	C-8	3.27"	-

300 WATT

T3	R7s	107194	3,8,9	Q300T3C	-	Clear 118mm	10/500	130	5000	2950	2000	C-8	4.68"	-
		127194	3,8,9	Q300T3C/120	EHM	Clear 118mm	10/500	120	5000	2950	2000	C-8	4.68"	-

(E) Means this lamp meets Federal Minimum Efficiency standards.

Halogen lamp symbols, footnotes and abbreviations are located on pages 131-133.