## LED 12W BR30 75w Replacement, Energy Star

12w = 75WIncandescent

Stock No. **Product Description** BR30-120-12-1-3000K 12w 927 lumens Dimming LED-1739-30K LED-1739-60K BR30-120-12-1-6000K 12w 927 lumens Dimming LED-1739-60K-277 BR30-120-12-1-6000K 12w 944 lumens Non-Dimming

## **Description:**

BR30 LED lamp, fully encapsulated, 12 Watt, E26 medium base. Replaces 75w BR30 halogen/ incandescent or equivalent CFL. Multiple SMD LED design provides a wide 120° light spread with no visible LED hot-spots. Dimmable with CFL/LED compatible dimmer

- 12w power consumption
- 120° Beam angle
- 120VAC Dimmable
- 277VAC Non-Dimmable
- Available in 3000K or 6000K CCT
- >80 CRI
- 50,000 Rated L70 LED life
- White finish
- UL Listed (US & C)
- Energy Star rated (3000K)
- 5 Year warranty

## **Applications:**


The 12w LED lamp has been designed to retrofit existing incandescent and/or CFL installations in recessed fixtures, thereby reducing maintenance and energy expenditures - and as an energy saving light source for new fixtures and installations.

- Task lighting
- Hospitality lighting
- Recessed down-lighting
- Residential lighting

## **Packaging:**

Master-pack: 25 each



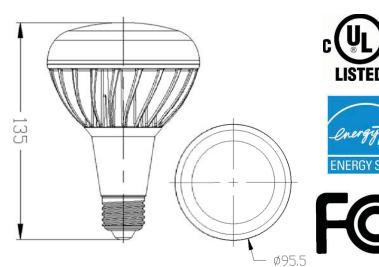

LED

| Technical Specifications |                   |                          |                               |
|--------------------------|-------------------|--------------------------|-------------------------------|
| Bulb Type                | BR30              | Mounting                 | E26 Edison Base               |
| Bulb Material            | Aluminum/Plastic  | LEDs:                    | SMD LEDs                      |
| Power<br>Consumption     | 12 watts          | Beam Angle               | 120 °                         |
| Initial<br>Lumens        | 927 / 944 Lumens  | Dimmable                 | Yes (120V only)               |
| Efficacy                 | Up to 79 LPW      | Replaces                 | 75w Halogen /<br>Incandescent |
| Rated LED<br>Life        | Up to 50,000 Hrs. | сст                      | 3000K<br>6000K                |
| Power<br>Factor:         | >90               | CRI:                     | > 80                          |
| IR / UV                  | None              | Mercury/<br>Lead Content | None                          |
| Warranty                 | 5 year Limited    | Dimensions               | 5.3"<br>X 3.75″               |

Note: All specification information falls within a  $\pm$  2% range and is subject to change without notice.

NOTE: Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.