



Incredible **25,000** hrs

GENERAL DESCRIPTION

Neptun's high performance LED A19 bulbs are designed for the replacement of existing incandescent bulbs up to 60W. The LED-619 series bulbs are offered in a variety of color temperatures for flexibility in all types of applications. Its analog/triac dimming system allows for 100%-0% light output for increased energy savings.

APPLICATION

- Suitable for use in outdoor and indoor environments
- Not for use in fully enclosed fixtures
- Not for use where directly exposed to water

STRUCTURE, MATERIALS, & FEATURES

- Fin-less design with excellent thermal management.
- Round frosted polycarbonate shatterproof lens. (Glare Free)
- Flicker Free analog/triac dimming system operates on 120V.
- Wide variety of Correlated Color Temperatures.
- High Luminous Efficacy: > 80 Lm/W
- Environmental Friendly - mercury and lead free.
- RoHS Compliant.
- No UV or IR radiation.
- High Output LED's.
- Integrated high efficiency driver.
- Up to 15 years Maintenance free operation.
- 5 Year Warranty.

ORDERING INFORMATION

Sample Number: LED-61906-120V-ADIM-830-E26
Custom options and accessories available. Please consult factory

Series	Wattage	Voltage	Driver	Color Temp	Base
LED-619 = A19	06 = 6 W 10 = 10 W	120V = 120 VAC	ADIM = Analog Dimming	827 = 2700°K 830 = 3000°K 841 = 4100°K 850 = 5000°K	E26 = Medium Base



lightinnovations@work™

PRODUCT INFORMATION

Model No.	Watts	Input Line Current (Amp) @ 120VAC	Power Factor	THD	CCT (°K)	CRI	Lumens	Lm/W	Base	Beam Angle
LED-61906-120V-ADIM-827	6	0.052	>0.90	<15%	2,700°	>80	480	80	E26	300°
LED-61906-120V-ADIM-830	6	0.052	>0.90	<15%	3,000°	>80	492	82	E26	300°
LED-61906-120V-ADIM-841	6	0.052	>0.90	<15%	4,100°	>80	504	84	E26	300°
LED-61906-120V-ADIM-850	6	0.052	>0.90	<15%	5,000°	>80	510	85	E26	300°
LED-619010-120V-ADIM-827	10	0.087	>0.90	<15%	2,700°	>80	800	80	E26	300°
LED-619010-120V-ADIM-830	10	0.087	>0.90	<15%	3,000°	>80	820	82	E26	300°
LED-619010-120V-ADIM-841	10	0.087	>0.90	<15%	4,100°	>80	840	84	E26	300°
LED-619010-120V-ADIM-850	10	0.087	>0.90	<15%	5,000°	>80	850	85	E26	300°


SPECIFICATIONS

- LED Driver Constant Current
- Dimming Triac / Analog
- Power Supply 350mA
- Start Method InstantON
- Hot Re-start InstantON
- Input Line Voltage 120 VAC
- LED / Driver System Life 25,000 Hrs.
- Color Temperature Various
- Color Rendering Index (CRI) > 80
- Minimum Starting Temperature -20°C
- Maximum Starting Temperature 45°C
- Lumens per Watt > 80
- Power Factor > 0.90
- Total Harmonic Distortion < 15%
- FCC Compliance Part 15, Subp. C
- Warranty 5 Year

ENERGY SAVINGS

75% Energy Savings

Operation Costs Comparison over Life of LED Bulb

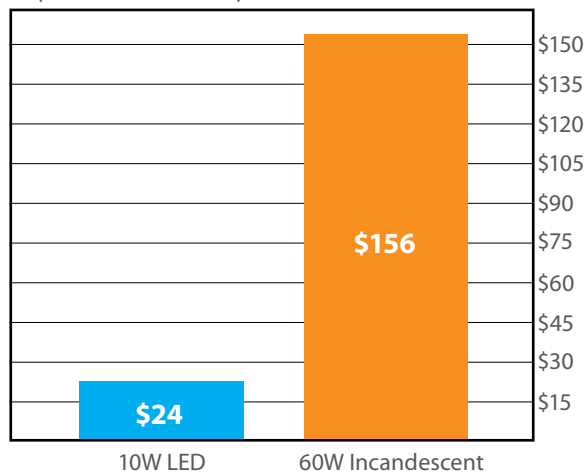

*Based on \$0.10 kw/H

*12Hrs. per Day Usage

Neptun Light, Inc.
13950 Business Center Drive
Lake Forest, IL 60045
Fax: 847.735.8004

Neptun Light, Inc. reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.
©2002-2016 Neptun Light, Inc. All rights reserved.

Spec. Rev. 7-2016