

GFWT1-W


15 Amp, 125 Volt Receptacle/Outlet, 20 Amp Feed-Through, Self-test SmartlockPro Slim Weather & Tamper-Resistant GFCI, Monochromatic, back and side wired, wallplate/faceplate sold separately - White




UPC Code : 078477709238

Country Of Origin : China

RoHS Compliant : Yes



Available Colors :

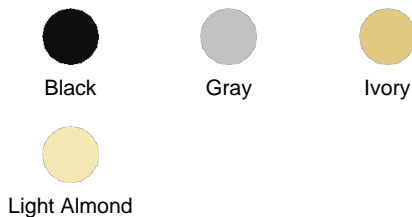

Technical Information

Product Features

Amperage : 15 A

At Rated Voltage : 1 HP

Brand : SmartlockPro

Color : White

Feature : Self-Test

Fed Spec WC-596 : Yes

Grade : Residential/Commercial Specification Grade

Grounding : Green Ground Screw

NEMA : 5-15R

Pole : 2

Standards and Certifications : UL/CSA, NEMA WD6, NEMA WD1

Strap Material : Stainless Steel

Tamper Resistant : Yes

Termination : Back & Side

Trip Level : Class A, 5mA plus or minus 1mA

Type : Weather Resistant

Voltage : 125 VAC

Wallplate : Not Included

Warranty : 2-Year Limited

Wire : 3

AC Horsepower Ratings

At Rated Voltage : 1 HP

Dielectric Voltage : Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Short Circuit Current Rating : 10KA

Temperature Rise : Max 30C after 100 cycles OL at 150 percent rated current

Electrical Specifications

Dielectric Voltage : Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Operating Temperature : -35C to +66C

Short Circuit Current Rating : 10KA

Temperature Rise : Max 30C after 100 cycles OL at 150 percent rated current

Environmental Specifications

Face Material : Polypropylene

Grounding Screw : Stainless Steel

Line Contacts : Brass Double-Wipe .031 Thick

Notes : Wallplate Sold Separately

Product ID : Ratings are permanently marked on device

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Terminal Screws : Stainless Steel

Yoke : Stainless Steel

Mechanical Specifications

Amperage : 15 A

Brand : SmartlockPro

Color : White

Face Material : Polypropylene

Feature : Self-Test

Fed Spec WC-596 : Yes

Grade : Residential/Commercial Specification Grade

Grounding : Green Ground Screw

NEMA : 5-15R

Notes : Wallplate Sold Separately

Pole : 2

Product ID : Ratings are permanently marked on device

Standards and Certifications : UL/CSA, NEMA WD6, NEMA WD1

Strap Material : Stainless Steel

Tamper Resistant : Yes

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back & Side

Trip Level : Class A, 5mA plus or minus 1mA

Type : Weather Resistant

Voltage : 125 VAC

Warranty : 2-Year Limited

Wire : 3

Body Material : Polycarbonate
Clamps : Brass
Face Material : Polypropylene
Grounding Screw : Stainless Steel
Line Contacts : Brass Double-Wipe
.031 Thick
Notes : Wallplate Sold Separately
Operating Temperature : -35C to +66C
Terminal Screws : Stainless Steel
Yoke : Stainless Steel

Standards and Certifications
ANSI : C-73
CSA C22.2 No. 42 : Yes
CSA-C22.2 No. 144.1-06 : File LR-57811
Fed Spec WC-596 : Yes
MIL-SPEC : A-A-55459-SB
NOM : Yes
UL 943 : File E48380
UL498 : Yes

Material Specifications

Body Material : Polycarbonate
Clamps : Brass

Features and Benefits

- Provides continuous ground fault protection – detects and trips on actual ground fault even when self-test is being conducted
- On initial power up, tests the GFCI within 3 seconds
- Auto-monitoring exceeds the UL requirement
- Auto adapts and shifts to more frequent testing if potential problem is detected
- Status Indicator Light provides simple, intuitive feedback on power and protection status as well as indication of line/load reversal
- Patented Lockout Action prevents reset if GFCI is damaged and cannot respond to a ground fault
- Electronics are designed to minimize any false triggers
- Reduced depth makes it easier to install in any electrical box, even shallow ones
- Terminals allow for easy wiring options – back and side wire capable
- External back wire clamps provide visual indication of proper wire seating
- Withstands high torque and resists wire pullout
- Stainless steel strap and screws, cold impact resistant face and buttons
- Trip threshold meets or exceeds UL requirements for tripping time
- Improved immunity to high-frequency noise reduces nuisance tripping
- Advanced electronics design provides superior resistance to electrical surges and over-voltages
- Compatible with all Decora devices and wallplates; available in select Decora colors
- UL Fed Spec WC-596 rated

Patents*

CA2730014	US8587914
MX302458	US8599522
MX308495	US8944859
US7697252	US9053886

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

