



MASTER Glass LED bulbs

MAS LEDBulb DT3.4-40W E27 927A60CL G

Featuring a classic heritage design, these filament MASTER glass bulbs combine the familiar shapes of incandescent glass LED bulbs with the benefits of long-lasting LED technology. Ideal for creating a cozy atmosphere for customers, these glass LED bulbs provide excellent quality of light. MASTER glass bulbs can be dimmed for different lumen levels and color temperatures (dimmable glass led bulbs). They also deliver significant energy savings, using 30% less energy compared to normal LED bulbs. By offering a lifetime of 25,000 hours, these dimmable glass LED bulbs also reduce maintenance costs.

Product data


General Information		Stroboscopic effect value (SVM)	
Lighting Technology	LED	Stroboscopic effect value (SVM)	0.4
Flux measurement reference	Sphere	Operating and Electrical	
Switching Cycle	20,000	Line Frequency	50 to 60 Hz
Nominal lifetime	25,000 hour(s)	Input Frequency	50 to 60 Hz
Cap-Base	E27 [E27]	Power Consumption	3.4 W
Light Technical		Lamp Current (Nom)	24 mA
Color Code	922-927 [CCT of 2200K-2700K]	Wattage Equivalent	40 W
Luminous Flux	470 lumen	Starting Time (Nom)	0.5 s
Color Designation	Warm Glow(WG)	Warm-up time to 60% light	0.5 s
Correlated Color Temperature (Nom)	2200 2700 K	Power Factor (Fraction)	0.6
Luminous Efficacy (rated) (Nom)	138 lm/W	Voltage (Nom)	220-240 V
Color Consistency	<6	Temperature	
Color rendering index (CRI)	90	Ambient temperature range	-20 °C to 45 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %	T-Case Maximum (Nom)	70 °C
Flickering value (PstLM)	0.9		

MASTER Glass LED bulbs

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	A60 [A 60mm]
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1109129
CE mark	Yes



EU RoHS compliant	Yes
Product Data	
Full product code	871951444967100
Order product name	MAS LEDBulb DT3.4-40W E27 927A60CL G
Order code	929003009982
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929003009982
Full product name	MAS LEDBulb DT3.4-40W E27 927A60CL G
EAN/UPC - Case	8719514449688

Dimensional drawing



Product	D	C
MAS LEDBulb DT3.4-40W E27 927A60CL G	60 mm	104 mm

Photometric data

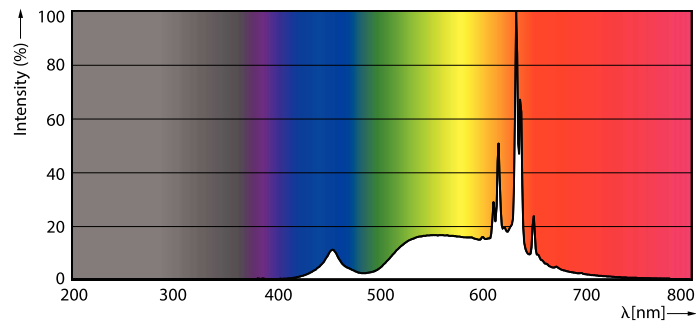


Spectral Power Distribution Colour - MAS LEDBulb DT3.4-40W E27 927A60CL G

Light Distribution Diagram - MAS LEDBulb DT3.4-40W E27 927A60CL G

MASTER Glass LED bulbs



Photometric data



Signify Koninklijke Philips Lighting B.V. Page 17

General uniform lighting - MAS LEDBulb DT3.4-40W E27 927A60CL G

Lifetime

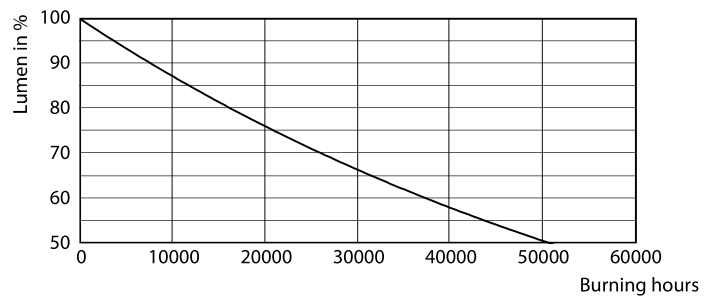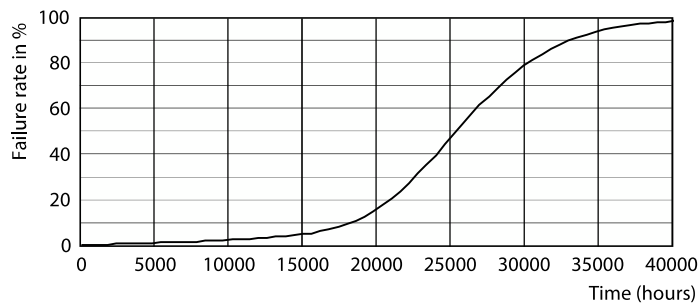

Life Expectancy Diagram - MAS LEDBulb DT3.4-40W E27 927A60CL G

Lumen Maintenance Diagram - MAS LEDBulb DT3.4-40W E27 927A60CL G

