

## OPTOTRONIC Linear Programmable LED Drivers

57434 / OTi48/120-277/2A0 DIM-1L G2



The OPTOTRONIC programmable dimmable family consists of highly efficient linear constant current LED power supplies. One click programming through the OPTOTRONIC programmer allows OEMs to configure the output current with 1mA resolution. Also fully customizable by customers are the end of life indicator, LED thermal protection and the constant lumen maintenance features. The OPTOTRONIC programmer does not require the power supply to be powered up or connected to AC line voltage while programming. The power supplies are available with built-in 0-10V dimming protocol with models available in 1% to 10%. The auxiliary output has the capability to power various sensors and is optimized for the OSRAM Connected Lighting Module (CLM).

### Product family features

- OEM Programmable with 1mA resolution to perfectly match LED load and maximize performance
- Integrated OEM programmable features include: - Constant lumen maintenance - End of life indication - LED thermal protection
- Programming doesn't require powering up or connecting the power supply to AC line voltage
- Specification grade dimming down to 1% or 10% on 0-10V dimmers
- Available optional auxiliary output to power 12 V, 20 V, and 24 V low power applications
- Slim form factors
- Input voltage: - Universal 120-277 V<sub>AC</sub> 50/60Hz - 347 V<sub>AC</sub> 50/60 Hz
- UL Class 2 output for safe operation

### Areas of application

- Indirect/direct
- Linear
- Recessed troffer

# Product datasheet


## Technical data

### General product information


Product Name	OTi481202772A0DIM1LG2 10/CS 1/SKU
Ordering Abbreviation	OTi48/120-277/2A0 DIM-1L G2
Brand Name	OSRAM
General Description	OTi48 LIN UNV 0-10V G2 NO AUX
Programmable Features	Output current, Dimming level, Dim-to-off, Soft Start, LED thermal protection, Auxiliary output voltage, Constant lumen output, End-of-life indicator
Programming Tool	51645 & 51647/51648
Product Number	57434

### Electrical data

Nominal Total Max Wattage	48 W
Nominal Voltage	120-277 V

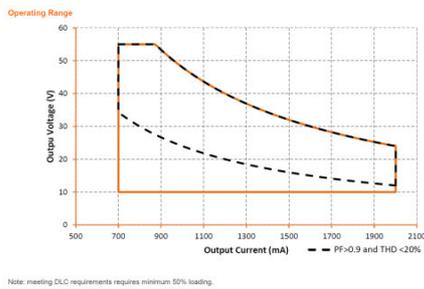


OTi48W Linear G2 Operating Range

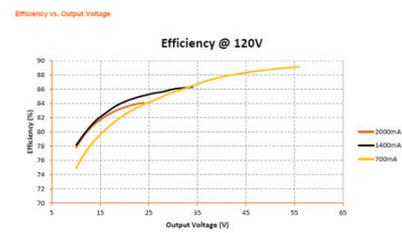



OTi48W Linear G2 Efficiency\_120V Output Voltage

# Product datasheet

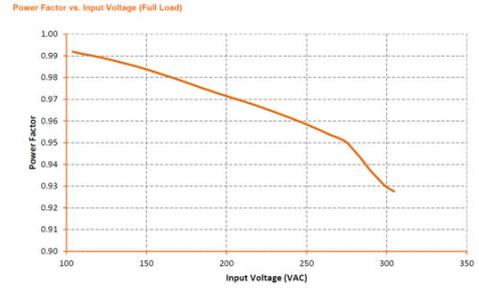


OTi48W Linear G2 Efficiency\_277V Output Voltage

OTi48W Linear G2 PFactor\_Input Voltage

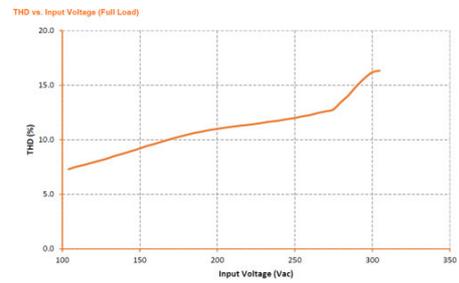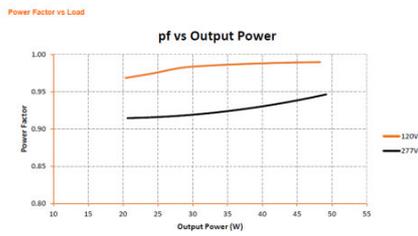

OTi48W Linear G2 PFactor\_Output

OTi48W Linear G2 THD\_Input Voltage

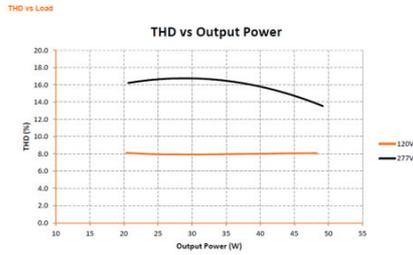

OTi48W Linear G2 THD\_Output

**Electrical specifications - Dimming**

<b>Dimming Control</b>	0 – 10V (Isolated) <sup>1)</sup>
<b>Dimming Input Isolation [CRM]</b>	2.5kV
<b>Dimming Range</b>	1-100%
<b>Dimming Type</b>	Analog
<b>Dim-to-Off OFF/ON</b>	0.7V/1V
<b>Source/Sink Current</b>	0.2mA max
<b>Standby Power</b>	1.4W(120V); 1.7W(277V)

<sup>1)</sup> CAUTION: More than one power supply present

**Electrical specifications - Input**

<b>Efficiency @ Full load 120V</b>	≥89%
<b>Efficiency @ Full load 277V</b>	≥90%
<b>Frequency Range (Hz)</b>	50 – 60 Hz (+/- 10%)
<b>Input Current (A) 120V</b>	0.52
<b>Input Current (A) 277V</b>	0.23
<b>Input Voltage (VAC)</b>	120V-277V (+/- 10%)
<b>Inrush Current (Apk, T@50% of Apk) 120V</b>	1.33, 57µs
<b>Inrush Current (Apk, T@50% of Apk) 277V</b>	2.66, 46µs
<b>Power Factor @ Full load 120V</b>	>0.9
<b>Power Factor @ Full load 277V</b>	>0.9

## Product datasheet

THD @ Full load 120V	<10%
THD @ Full load 277V	<20%

### Electrical specifications - LED thermal protection (NTC)

NTC Value Active Range	$\leq 25k\Omega$ <sup>1)</sup>
Temperature Derating start	User defined

<sup>1)</sup> External NTC cannot leave the fixture. The PRG/ NTC control circuit terminals or lead wires are not isolated.

### Electrical specifications - Output

LED Power-Up Time	<1sec
Line Regulation	<5%
Load Regulation	<5%
Max. Output Power (W)	20W
Output Current (mA)	700-2000mA (1mA step), Default 1400mA
Output Ripple Current	<20%@ 2000mA
Output Short-Circuit Protection	Yes, non-latching
Output Voltage (VDC)	10-55VDC
Over Load Protection	Yes, non-latching
Over Temperature Protection	Foldback at 110°C
Over Voltage Protection	Yes, non-latching

### Environmental specifications

Ambient Operating Temperature	-30°C to 50°C
Case Temperature (Tc)	85°C Max, 75°C – 5 Year Warranty <sup>1)</sup>
EMI Compliance	FCC Part 15 Class A
Max. Relative Humidity (%)	85% non-condensing
Max. Storage Temp.	70°C
Sound Rating	Class A
Transient Protection	NEMA SSL 1 - 2010, Non-Roadway 2.5KV
UL Environmental Rating	Dry & Damp
UL File number	E320395

<sup>1)</sup> Warranty applicable only at 75°C

### Packaging Information

Item number	EAN/UPC	Packaging	Quantity	Outside dimensions l x w x h	Gross weight
57434	4062172018746	Unpacked (SKU)	1		
57434	4062172018753	Shipping box (Case)	10	12.2 in x 6.4 in x 2.4 in	5.5 lb

## Product datasheet

Item number	EAN/UPC	Packaging	Quantity	Outside dimensions L x w x h	Gross weight
-------------	---------	-----------	----------	------------------------------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

For information on specific product warranties, visit [www.osram.us/warranty](http://www.osram.us/warranty). Specifications are subject to change without notice. OSRAM, OPTOTRONIC, PrevaLED and DEXAL are registered trademarks of OSRAM GmbH. SensiLUM is a trademark of OSRAM SYLVANIA Inc. All other trademarks are those of their respective owners.