

Accessories

ROADWAY BRACKETS FOR WOOD POLE MOUNTING


Roadway bracket aluminum or galvanized steel for mounting on wood poles, pipe sizes from 1-1/4 to 2-in. (32 to 51mm).




Cantilever
Fig. 1



Single-guy
Fig. 2

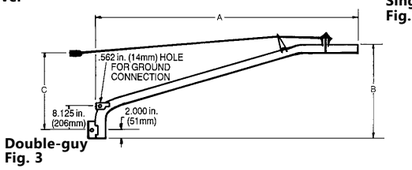

Double-guy
Fig. 3

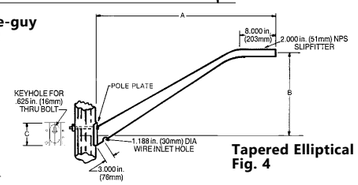

Tapered Elliptical
Fig. 4

BRACKET SELECTION TABLE


Thru bolts and lag screws not included

Nominal Length		See Fig.	Maximum Load of Each Luminaire 80 MPHI (For high wind velocities, consult factory)				Ordering Number	Pipe Size		Brackets Dimensions							
			Max Weight Max EPA							A		B		C		Weight	
(ft)	(m)		lbs	kgs	sq ft	sq m		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(lbs)	(kgs)
ALUMINUM PIPE BRACKETS																	
4	1.2	1	40	18	0.9	0.08	RBACWH4X1.25	1-1/4	32	45	1143	18-9/16	217	8-1/4	1.6	3.5	1.6
6	1.8	1	35	16	0.7	0.07	RBACWH6X1.25	1-1/4	32	69	1753	24-1/16	611	8-1/4	2.0	4.5	2.0
2.5	0.8	1	90	41	2.3	0.21	RBACWH2.5X2	2	51	30	762	15-1/8	384	8-1/4	1.6	3.5	1.6
4	1.2	1	70	32	1.8	0.17	RBACWH4X2	2	51	45	1143	18-3/8	467	8-1/4	2.0	4.5	2.0
6	1.8	1	50	23	1.4	0.13	RBACWH6X2	2	51	69	1753	24	610	8-1/4	2.7	6.0	2.7
6	1.8	2	80	36	1.4	0.13	RBAGWH6X2	2	51	69	1753	24	610	21	3.4	7.5	3.4
8	2.4	2	60	27	0.7	0.07	RBAGWH8X2	2	51	93	2362	29-5/8	752	23	1.3	9.5	4.3
8	2.4	3	70	32	1.4	0.13	RBADWH8X2	2	51	93	2362	29-5/8	752	23	5.7	12.5	5.7
10	3.0	3	50	23	0.9	0.08	RBADWH10X2	2	51	117	2972	35-1/4	895	25	6.6	14.5	6.6
12	3.7	3	40	18	0.7	0.07	RBADWH12X2	2	51	141	3581	35-1/4	1038	27	7.5	16.5	7.5
GALVANIZED STEEL PIPE BRACKETS																	
2.5	0.8	1	90	41	2.3	0.21	RBSCWH2.5X1.25GV	1-1/4	32	30	762	15-1/4	387	8-1/4	3.4	7.5	3.4
4	1.2	1	70	32	1.8	0.17	RBSCWH4X1.25GV	1-1/4	32	45	1143	18-7/16	468	8-1/4	4.5	10.0	4.5
6	1.8	1	45	21	1.4	0.13	RBSCWH6X1.25GV	1-1/4	32	69	1753	14-1/16	357	8-1/4	6.3	14.0	6.3
2.5	0.8	1	90	41	2.8	0.26	RBSCWH2.5X2GV	2	51	30	762	15-1/8	384	8-1/4	5.0	11.0	5.0
4	1.2	1	90	41	2.3	0.21	RBSCWH4X2GV	2	51	45	1143	18-3/8	467	8-1/4	7.0	15.5	7.0
6	1.8	1	70	32	2.0	0.19	RBSCWH6X2GV	2	51	69	1753	24	610	8-1/4	9.5	21.0	9.5
8	2.4	1	45	20	1.4	0.13	RBSCWH8X2GV	2	51	93	2362	29-5/8	752	8-1/4	12.5	27.5	12.5
10	3.0	2	60	27	1.2	0.11	RBSGWH10X2GV	2	51	117	2972	35-1/4	895	25	17.0	37.5	17.0
12	3.7	2	50	23	0.7	0.07	RBSGWH12X2GV	2	51	141	3581	40-3/8	1026	27	20.4	45.0	20.4
14	4.3	3	40	18	0.7	0.07	RBSDWH14X2GV	2	51	165	4191	46-1/2	1181	30	26.5	58.5	26.5
16	4.9	3	35	16	0.7	0.07	RBSDWH16X2GV	2	51	189	4801	52-1/8	1324	33	29.9	66.0	29.9
4	1.2	NOTE	90	41	2.3	0.21	RBSPWH4X2GV	2	51	45	1143	18-3/8	467	8-1/4	7.3	16.0	7.3
ALUMINUM TAPERED ELLIPTICAL BRACKETS																	
4	1.2	4	55	25	1.6	0.15	RBATWH4X2	2	51	42	1067	16	406	4-5/8	2.7	6.0	2.7
6	1.8	4	53	24	1.6	0.15	RBATWH6X2	2	51	66	1676	24	610	4-3/4	4.5	10.0	4.5
8	2.4	4	53	24	1.2	0.11	RBATWH8X2	2	51	90	2286	30	762	6-1/8	6.3	14.0	6.3
10	3.0	4	44	20	1.2	0.11	RBATWH10X2	2	51	114	2896	30	762	7	7.7	17.0	7.7
4	1.2	NOTE	60	27	1.6	0.15	RBAPWH4X2	2	51	48	1219	30	762	15	4.1	9.0	4.1

NOTE: Bracket has a flat plate for wall mounting. For hole sizes and location of holes in plate, consult factory.

Mounting Accessories

FLOODLIGHT BRACKETS

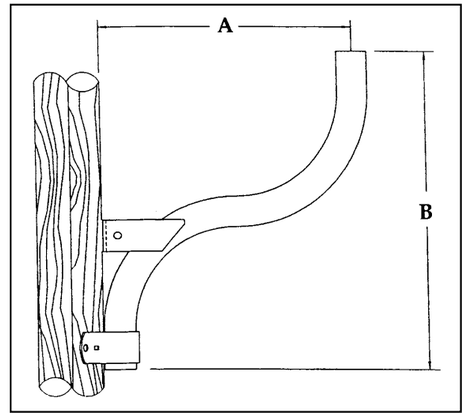

WOOD POLE MOUNTING
Single Floodlight Bracket For Wood Pole Mounting
• Most items in stock for immediate shipment
• Mounting hardware not included
• Finish: Primer
• For hot dip galvanized, substitute "G" in place of "P"

STEEL

Ordering Number	Pole Size (in)	A (in)	B (in)	Weight (lbs)
SF-18P	2"	18"	23"	15
SF-07P	2"	7"	20"	11

TENON REDUCER BRACKETS FOR POLE TOP MOUNTING (FIG.1)

- Mounting hardware not included
- Red primer painted (Standard)

Ordering Number	A OD (in)	B ID (in)	C (in)	D (in)	Weight (lbs)
TR-30-2P	2-3/8	3-1/4	6-1/4	4	8
TR-35-2P	2-3/8	3-13/16	6-1/4	4	10
TR-40-2P	2-3/8	4-1/4	6-1/4	4	11
TR-45-2P	3	4-1/4	6-1/4	4	12

FIG. 1





FIG. 2

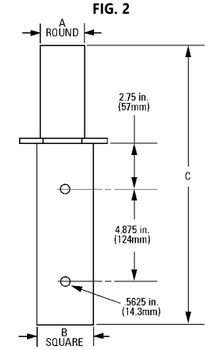

REMOVABLE TENON ADAPTER FOR SQUARE STEEL POLES (FIG.2)

- Mounting hardware not included
- Red primer painted or hot dip galvanized

Ordering Number	Pole Size (in)	A (in)	B (in)	C (in)	Weight (lbs)
RTASQ-4-2P	2-3/8	2-3/8	3	13-3/4	7
RTASQ-4-2G	2-3/8	2-3/8	3	13-3/4	8
RTASQ-5-2P	2-3/8	2-3/8	4	13-3/4	8
RTASQ-5-2G	2-3/8	2-3/8	4	13-3/4	9
RTASQ-6-2P	2-3/8	2-3/8	5	13-3/4	17
RTASQ-6-2G	2-3/8	2-3/8	5	13-3/4	19




FIG. 3