

LUNERA SUSAN LAMP

LED Replacement for Metal Halide Lamp

150W / 50W E26 Medium Base, Vertical Mount




Description

The Susan Lamp is a plug-and-play replacement for a Metal Halide (MH) lamp with an E26 medium base. It is available with an uplight option for glass or acrylic fixtures. With a significantly lower energy consumption than conventional MH lamps, this LED lamp replaces 150W or 50W MH lamps.


Lunera's BallastLED technology makes the lamp truly plug-and-play by allowing it to operate directly off of existing ballasts. Simply replace the existing MH lamp with the Susan Lamp without making any modifications to the fixture.

The Susan Lamp has a rated life of 50,000 hours – 5 times longer than that of MH lamps. This eliminates costly replacement cycles and reduces maintenance costs.

The Susan Lamp is available in a range of color temperatures including 3500K, 4000K, and 5000K. It delivers consistent light levels across its long life, which results in a high quality lighting experience.

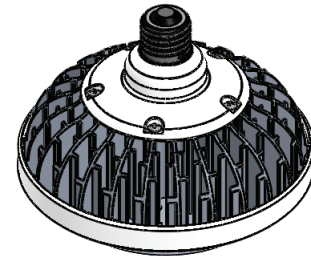

150W
50W

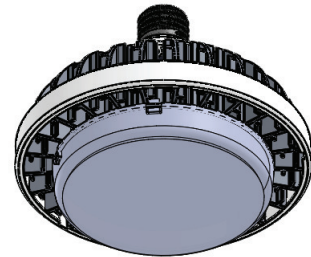

150W
50W

Features

- Replaces 150W or 50W Metal Halide (MH) lamps
- Uplight option to support glass & acrylic reflector fixtures
- Plug-and-play installation, operates directly off of existing installed MH ballast
- Ultra-low energy draw, extends existing ballast life
- Up to 5,900 lumens delivered
- > 80 CRI
- 25W to 52W lamp power, yields 50%-80% energy savings
- CCT options: 3500K, 4000K and 5000K
- 50,000 hours to L70 lifespan

Ordering Information

Example: SN-V-E26-150W-50W-3500-G2

Series	Version	Socket Type	Lamp Wattage Replaced	CCT	Generation
SN: Susan Lamp	V: Vertical VU: Vertical with Uplight	E26: Fits in medium (E26) base MH sockets	150W-50W Supports 150W or 50W ballasts	3500: 3500K 4000: 4000K 5000: 5000K	G2: 2nd Generation


PROJECT	CONTACT	MODEL NO.
REFERENCE NO.	QUANTITY	DATE

Product Specifications - Vertical Mount Lamp With and Without Uplight

Driven by 150W (M57) Ballast		Driven by 50W (M90) Ballast
Illumination		
Color Temperatures	3500K, 4000K, 5000K	3500K, 4000K, 5000K
Lumens	3500K: 5,400 lm	3500K: 2,900 lm
	4000K: 5,500 lm	4000K: 3,000 lm
	5000K: 5,900 lm	5000K: 3,100 lm
Color Consistency	Lunera TruColor™ proprietary process	Lunera TruColor™ proprietary process
Lumen Maintenance (L70)	50,000+ hours life	50,000+ hours life
Electrical System		
Input Voltage	Driven by MH ballast	Driven by MH Ballast
Power Consumption	52W	25W
Lamp Wattage Replaced	150W (M57)	50W (M90)
Physical		
Dimensions (H x W)	5.5" x 6.1"	5.5" x 6.1"
Weight	1.5 lbs	1.5 lbs
Housing and Finish	Painted	Painted
Heat Sink Size	6"	6"
Environment		
Ambient Temperature	-40°F to 100°F	-40°F to 100°F
Humidity Rating	Damp OK, no direct water spray	Damp OK, no direct water spray
Fixture Type	Open or enclosed	Open or enclosed
Installation		
Socket Type	Fits vertical mount medium base (E26) MH socket	Fits vertical mount medium base (E26) MH socket
Certifications & Qualifications		
UL	Recognized, US & CAN	Recognized, US & CAN
RoHS Compliant	Contains no lead or mercury	Contains no lead or mercury
LM79, LM80, IES Files	Complete	Complete
Warranty		
Warranty	5 years	5 years

Photometry

The Susan Lamp E26 150W vertical lamp photometrics.
LM-79 REPORT NO. 101930332LAX-019

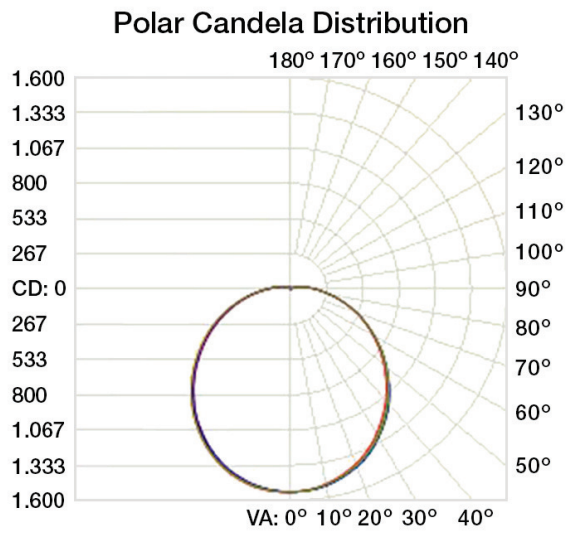

The Susan Lamp is available with an optional Uplight feature that directs 15% of the delivered lumens in an upward direction, making it ideal for acrylic or glass domed fixtures.

Lamp	Light Direction	
	% Down	% Up
Vertical	100%	0%
Vertical with Uplight	85%	15%

Uplight

Downlight


CAUTION

- This lamp is NOT approved for use with line voltage.

Product Dimensions

Measurements are rounded up. Dimensions are shown in millimeters. Please contact your Lunera representative for exact dimensions.

150W / 50W

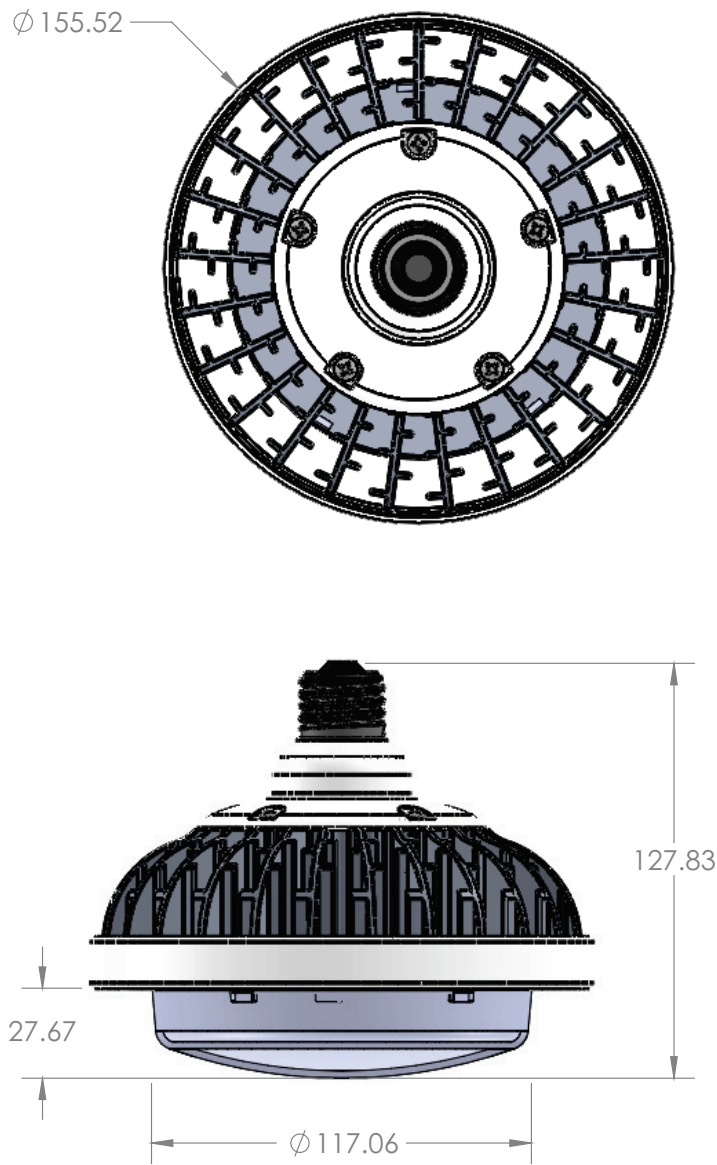

© 2015 Lunera Lighting, Inc. All Rights Reserved. Lunera and the Lunera logo are registered trademarks; Lunera TruColor is a trademark of Lunera Lighting, Inc. All other trademarks are the property of their respective owners.

Specifications are subject to change without notice. This document is for informational purposes only.

