



SPECIFICATION SHEET : **TCD4UNV0350-39L**

This Is An Original Product From Fulham Co., Inc


Description : Independent direct current power supply. Wide range input voltage from 120-277V. Constant current output. Power output to 39 Watts.

This Driver Will Operate Following LED Modules: Any module designed to accept 350mA, constant current with voltage of 22-27V

ELECTRICAL DATA

INPUT VOLT: 120V ~277± 10%, 50/60Hz	
POWER FACTOR	>0.9
EFFICIENCY	> 81%@120V,> 83%@277V
CURRENT PROTECTION	Yes
CONSTANT CURRENT, VOLTAGE OR POWER	Constant Current,350mA
OUTPUT VOLTAGE	22 ~ 27V
OUTPUT SHORT CIRCUIT PROTECTION	Yes
OUTPUT OPEN CIRCUIT PROTECTION	Yes
OUTPUT TO GROUND SHORT PROTECTION	Yes
OVER LOAD PROTECTION	Yes
MAX. CASE HOT SPOT TEMPERATURE	70°C
MIN. LAMP STARTING TEMPERATURE	0°C
SERVICE LIFE	50,000 hours
APPROVALS/CLASS	cURus, Class2, Damp location


MECHANICAL DATA

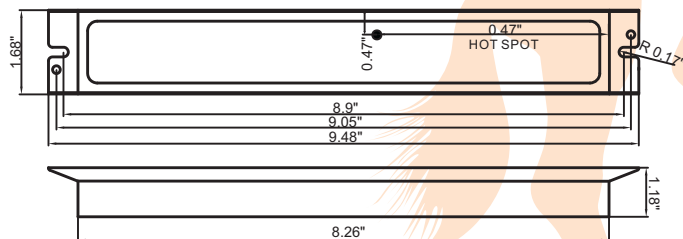

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	GREEN/ YELLOW	GRAY	VIOLET	RED & BLK
LENGTH-INCHES	6"	6"	6"	6"	6"	12"

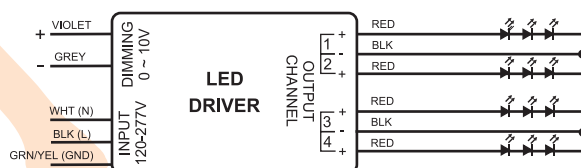

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.