



Polycarbonate Square Combination Units Specification

LED Exit Signs

120 or 277 Voltage, Damp Location

Features and Benefits:

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast installation
- Replaceable directional chevron inserts are easily removed and reinserted
- Letters 6" height with 3/4" stroke
- Single or double face configuration
- Two fully adjustable glare-free square shape light heads for emergency light
- Emergency lights can be adjusted- side mounting or top mounting
- Wall or ceiling mounting
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy
- 120/277 VAC dual voltage operation
- Low energy consumption- only 3.8W at normal operation and 15W at emergency operation
- LED indicator light and push button test switch
- Remote capability – Combination units come standard with 2, 6v 4.5ah sealed lead acid batteries, for an additional 11w in remote capability
- LEDs mounted on print circuit board
- LED lamps are operating in normal (AC input) and emergency (DC input) modes
- 2 X 6V 5.4W DC T5 wedge base lamps for emergency mode
- Low voltage battery disconnection
- Maintenance-free battery provides an estimated service life of 10 years with an operating temperature range of 10°C to 40°C
- Power Factor of >.95
- UL Listed for damp location
- Meets NFPA 101, NEC, and NEMA code


Catalog Number

Notes

Type



Dimensions:

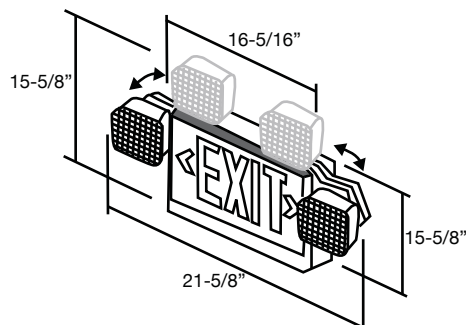

Warranties & Compliances:	Item #	Description	LED Color	Housing Color
  NATIONAL FIRE PROTECTION ASSN. Sealed Lead Acid 5 YEAR WARRANTY Electronics 5 YEAR WARRANTY LED Strip 25 YEAR WARRANTY	Ordering Information:			
	20784	2 Headed Adjustable Exit/Emergency Combo Red Letters with White Housing	Red	White
	20784RM	2 Headed Adjustable Exit/Emergency Combo Red Letters with White Housing with Remote Test	Red	White
	20794	2 Headed Adjustable Exit/Emergency Combo Red Letters Black Housing	Red	Black
	20785	2 Headed Adjustable Exit/Emergency Combo Green Letters White Housing	Green	White
	20795	2 Headed Adjustable Exit/Emergency Combo Green Letters Black Housing	Green	Black
Accessories:				
207LWG	Large Wire Guard for Exit Sign			
207R1	Single White Remote Head 6W 6V			
207R2	Double White Remote Head 2 X 6W 6V			
207R3	Single Grey Remote Weatherproof Head 5.4W 6V			
207R4	20709 Double Grey Remote Weatherproof Head 2 X 5.4W 6V			
29999	Red Diffuser Panel			
29999G	Green Diffuser Panel			
29999R2	Red Diffuser Panel with LED Strip			
29999G2	Green Diffuser Panel with LED Strip			
20704	Replacement White Canopy			
20734	Replacement Lead Acid Battery 6V 4.5Ah			
CHEVRONPL	Replacement White Chevron			

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcpinc.com

©TCP, Inc. NOV 2009/41821

TCP is proud to have been awarded
ENERGY STAR® Partner of the Year 2009.



PARTNER OF THE YEAR