



MASTER TL-D Super 80

MASTER TL-D Super 80 14W/840 SLV/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information		LLMF 2000 h Rated	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	LLMF 4000 h Rated	96 %
Life To 10% Failures (Nom)	12000 h	LLMF 6000 h Rated	95 %
Life To 50% Failures (Nom)	15000 h	LLMF 8000 h Rated	94 %
Life To 50% Failures Preheat (Nom)	20000 h	LLMF 12000 h Rated	93 %
LSF 2000 h Rated	99 %	LLMF 16000 h Rated	92 %
LSF 4000 h Rated	99 %	LLMF 20000 h Rated	91 %
LSF 6000 h Rated	99 %		90 %
LSF 8000 h Rated	99 %	Operating and Electrical	
LSF 12000 h Rated	89 %	Power (Rated) (Nom)	14.0 W
LSF 16000 h Rated	33 %	Lamp Current (Nom)	0.380 A
LSF 20000 h Rated	2 %	Temperature	
Light Technical		Design Temperature (Nom)	25 °C
Color Code	840 [CCT of 4000K]	Controls and Dimming	
Luminous Flux (Nom)	860 lm	Dimmable	Yes
Luminous Flux (Rated) (Nom)	860 lm	Approval and Application	
Color Designation	Cool Daylight	Energy Efficiency Label (EEL)	B
Chromaticity Coordinate X (Nom)	380	Mercury (Hg) Content (Nom)	2 mg
Chromaticity Coordinate Y (Nom)	380	Energy Consumption kWh/1000 h	17 kWh
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	63 lm/W		
Color Rendering Index (Nom)	85		

MASTER TL-D Super 80

Product Data


Full product code	871150095381040
Order product name	MASTER TL-D Super 80 14W/840 SLV/25
EAN/UPC - Product	8711500953810
Order code	928024384001
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	928024384001
Net Weight (Piece)	42.800 g
ILCOS Code	FD-14/40/1B-E-G13

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D	A	B	B	C
MASTER TL-D Super 80 14W/840 SLV/25	28 mm	361.2 mm	368.3 mm	365.9 mm	375.4 mm

TL-D 14W/840

Photometric data

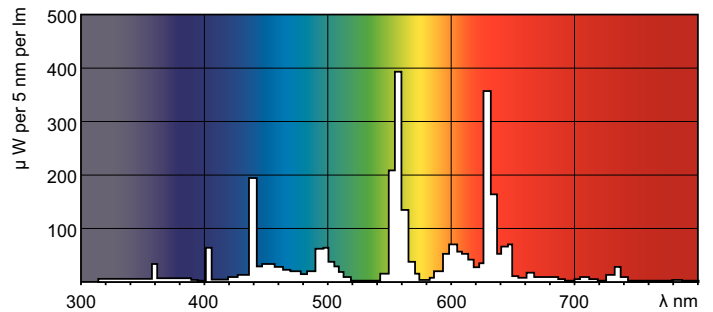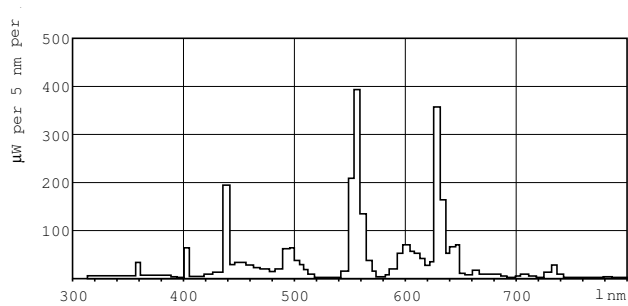

MASTER TL-D Super 80

