



TL-D LIFEMAX Super 80

TL-D 30W/840 1SL/25


The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life To 10% Failures (Nom)	10000 h		
Life To 50% Failures (Nom)	13000 h		
Life To 50% Failures Preheat (Nom)	20000 h		
Light Technical		Mechanical and Housing	
Color Code	840 [CCT of 4000K]	Cap-Base Information	Green Cap
Luminous Flux (Rated) (Nom)	2400 lm		
Color Designation	Cool White (CW)		
Lumen Maintenance 2000 h (Nom)	96 %		
Lumen Maintenance 5000 h (Nom)	94 %		
Chromaticity Coordinate X (Nom)	383		
Chromaticity Coordinate Y (Nom)	386		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	80 lm/W		
Color Rendering Index (Nom)	82		
Operating and Electrical		Approval and Application	
Power (Rated) (Nom)	30 W	Energy Efficiency Label (EEL)	A
Lamp Current (Nom)	0.360 A	Mercury (Hg) Content (Nom)	2.0 mg
Voltage (Nom)	98 V		
		Product Data	
		Full product code	871150028588100
		Order product name	TL-D 30W/840 1SL/25
		EAN/UPC - Product	8711500285881
		Order code	927981284036
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	25
		Material Nr. (12NC)	927981284036
		Net Weight (Piece)	0.130 kg

TL-D LIFEMAX Super 80

Dimensional drawing

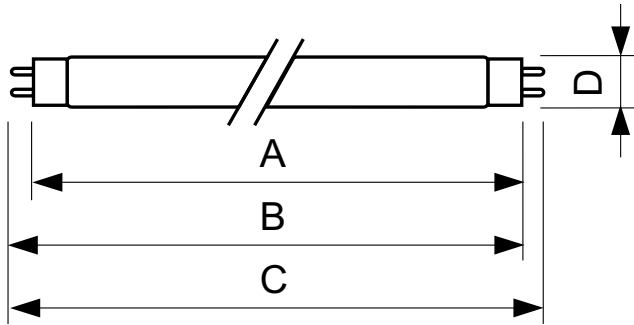

Product	D	A	B	B	C
TL-D 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

TL-D 30W/840/GC

