

# TL-D Colored

## TL-D Colored 36W Yellow 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life to 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Light Technical	
Color Code	160
Luminous Flux (Nom)	1580 lm
Luminous Flux (Rated) (Nom)	1580 lm
Color Designation	Yellow
Chromaticity Coordinate X (Nom)	495
Chromaticity Coordinate Y (Nom)	477
LLMF 2000 h Rated	85 %
Operating and Electrical	
Power (Rated) (Nom)	36.0 W
Lamp Current (Nom)	0.440 A
Voltage (Nom)	103 V


Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	13.0 mg
Energy Consumption kWh/1000 h	44 kWh
Product Data	
Full product code	871150072751040
Order product name	TL-D Colored 36W Yellow 1SL/25
EAN/UPC - Product	8711500727510
Order code	928048501605
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928048501605
Net Weight (Piece)	135.000 g

## TL-D Colored

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing

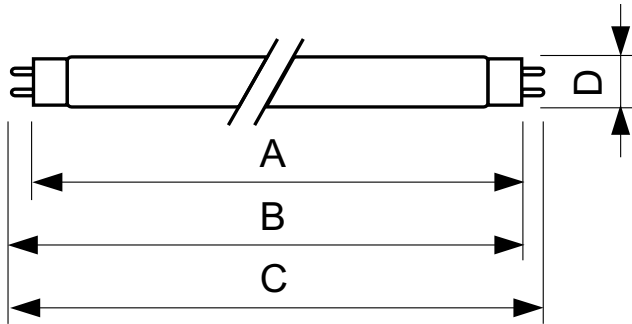


TL-D 36W/160 Yellow

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W Yellow 1SL/25	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

### Photometric data

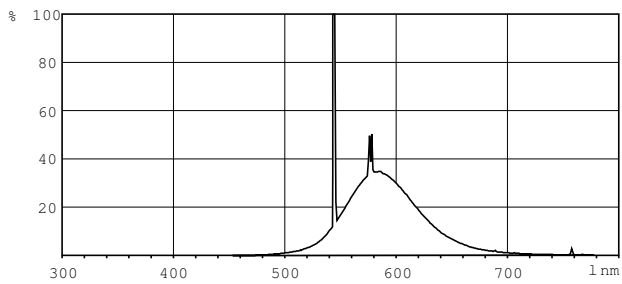

Lightcolor TL-D /160

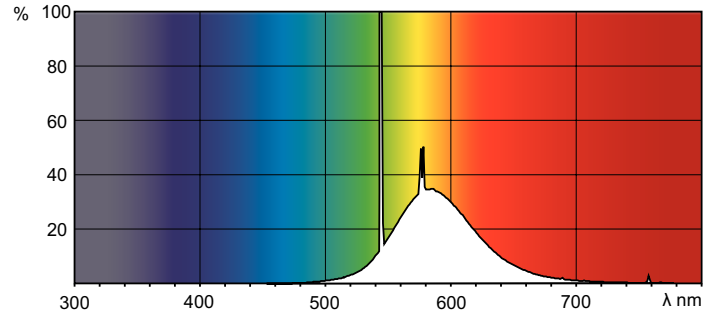

Lightcolor TL-D /160

