

Lampholders and Accessories for TC Lamps

G23 push-fit lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm²



Split pins for wall thickness up to 1.2 mm

Central fixing hole for screw M3

Weight: 12 g, unit: 500 pcs.

Type: 35004

Ref. No.: 101298

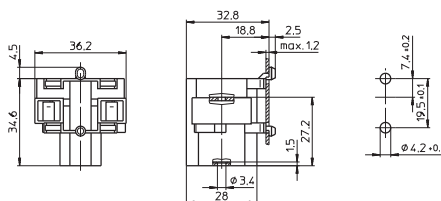

1

2

G23 surface-mounted lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm²



Fixing holes for screws M4

Central fixing hole for screw M3

Weight: 12.4 g, unit: 500 pcs.

Type: 35006

Ref. No.: 101306



3

4

G23 lampholder

For push-fit on track

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm²

Lateral fixing holes for self-tapping screws
acc. to ISO 1481/7049-ST2.9-C/F



Fixing holes for screws M4

Central fixing hole for screw M3

Weight: 14 g, unit: 500 pcs.

Type: 35007

Ref. No.: 101310

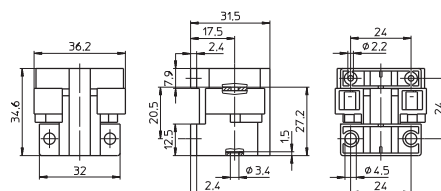

5

6

G23 surface-mounted lampholder

Casing: PBT GF, white, T140

Nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm²


Fixing holes for screws M4

Central fixing hole for screw M3

Weight: 11.1 g, unit: 500 pcs.

Type: 35008

Ref. No.: 101314



7

8

G23 lampholder, for cover caps (see p. 336-338)

External thread 40x2.5 IEC 60399

Casing: PBT GF, white, T140, nominal rating: 2/250

Push-in twin terminals: 0.5-1 mm²

Central fixing hole for screw M3


When using the central hole for mounting
additional depressions for anti-rotation pips
have to be provided.

For screw rings (see p. 451)

Weight: 16.3 g, unit: 500 pcs.

Type: 35010

Ref. No.: 101320

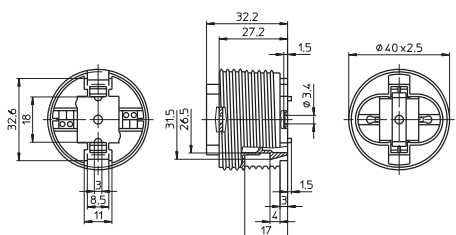

9

10