



Lampholder for T8 and T12 lamps
 Casing: PC, interior part: PBT GF, T140 (acc. to IEC)
 Push-In terminals: 18AWG solid
 or stranded solder-dipped, screw fixing foot with
 tapped holes for #8 screws (M4)
 For screw rings 26, 38, 50mm
 (1.024, 1.496, 1.969") dia.
 With slot insertion
 Weight: 13.7g, packing qty.: 250 pcs.
 Type: 84105 system 152
Ref. No.: 521123 white

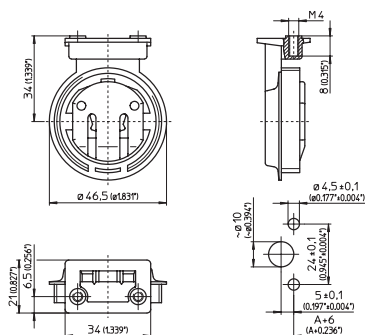

Foot gasket for degree of protection IP65/IP67
 For lampholder system 152
 Material: EPDM, black
 Weight: 1.4g, packing qty.: 1000 pcs.
 Type: 98085
Ref. No.: 106094



Screw Rings for Moisture and Dust Resistant Lampholders for Medium Bi-pin Fluorescent Lamps T8, T12

**Screw Rings for Medium Bi-pin Fluorescent Lamps
 T8, T12 and Protection Tube 38mm (1.496") dia.**

Screw rings for systems 152, 161, 162, 163,
 164, 165

Material: PBT GF, gasket: silicone

Weight: 17/20g, packing qty.: 500/250 pcs.

Type: 84122 for lamps 26mm (1.024") dia.


Ref. No.: 103709 grey

Ref. No.: 103710 white

Type: 84123 for lamps 38mm (1.496") dia. or for lamps
 26mm (1.024") dia. with protection tube 38mm (1.496") dia.

Ref. No.: 103711 grey

Ref. No.: 103712 white



Screw rings for systems 161, 162, 163,
 164, 165

For protection tube 50mm (1.969") dia.

Material: PBT GF

Gasket: EPDM

Weight: 43g, packing qty.: 125 pcs.

Type 84159

Ref. No.: 103749 grey

Ref. No.: 103750 white

